

Project Name:

Type:

Quantity:

INTENDED USE

Our outdoor architectural specification-grade linear wall-mounted light showcases signs or works of art. The fixture comes with an option to extend the length for lighting wider wall areas. Constant and evenly distributed illumination from beginning to the end of runs adds value to commercial or residential settings. Made in America.

FEATURES

Construction: Extruded aluminum

CRI: 90+

Lens: Clear

Lumens per foot: 565 lms

Watts per foot: 9.6W

Driver: External IP68-rated universal driver capable of 0-10V, MLV, ELV, TRIAC dimming to 1%.




Voltage: LED 24VDC & driver 120-277V

Life: 50,000 hours

Listings: cULus, Made in the USA Warranty: 5 years carefree for parts & components (Labor not included).



Profile Dimensions

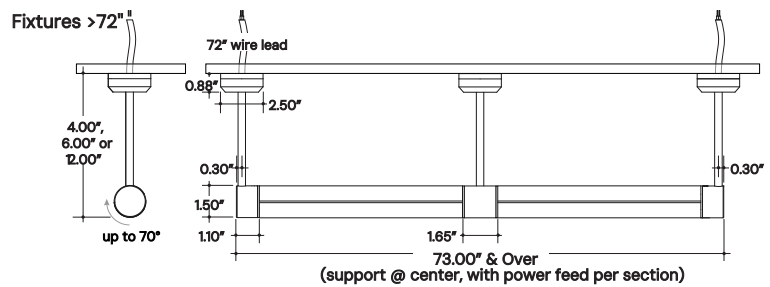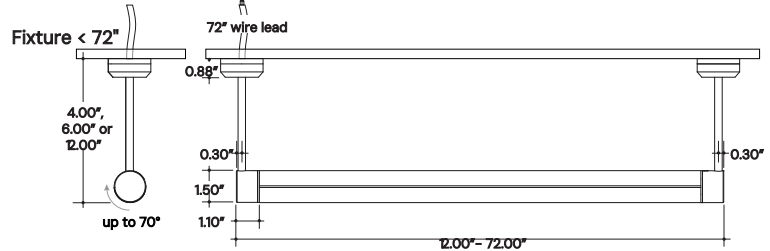

Fixture Head Rotates 70°



ORDERING INFORMATION Example:

Model	Length	Color Temp	Arm Length	Finish ²
11704	2 2 Foot 3 3 Foot 4 4 Foot 6 ¹ 6 Foot 8 ¹ 8 Foot XX ¹ Custom	27K 2700K 30K 3000K 35K 3500K 40K 4000K	6 6" 12 12"	SL Silver WH White BK Black BZ Bronze

¹ Fixtures over 72" consist of 2 fixtures, each requiring its own driver. For Custom Length, please refer to the tables on pg. 2 under "Actual Length".
² Extended lead times will apply on all finishes other than silver.

WATTAGE

4L Wattage

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
12	11 6/16	10.4	47	46 8/16	34.7
13	12 12/16	10.4	48	47 15/16	35.3
14	---	---	49	---	---
15	14 3/16	10.4	50	49 5/16	36.0
16	15 9/16	11.3	51	50 12/16	37.4
17	17	12.1	52	---	---
18	---	---	53	52 2/16	38.1
19	18 6/16	12.9	54	53 9/16	39.5
20	19 13/16	14.5	55	54 15/16	40.2
21	---	---	56	---	---
22	21 3/16	15.3	57	56 6/16	40.9
23	22 10/16	16.9	58	57 12/16	42.3
24	---	---	59	---	---
25	24	17.7	60	59 3/16	43.0
26	25 7/16	18.5	61	60 9/16	44.4
27	26 13/16	20.2	62	62	45.1
28	---	---	63	---	---
29	28 4/16	20.9	64	63 6/16	45.8
30	29 10/16	22.4	65	64 13/16	47.0
31	---	---	66	---	---
32	31 1/16	23.2	67	66 3/16	47.6
33	32 7/16	24.7	68	67 10/16	48.7
34	33 14/16	25.4	69	---	---
35	---	---	70	69	49.3
36	35 4/16	26.2	71	70 7/16	49.9
37	36 11/16	27.7	72	71 13/16	51.1
38	---	---			
39	38 1/16	28.4			
40	39 8/16	29.9			
41	40 14/16	30.5			
42	---	---			
43	42 5/16	31.2			
44	43 11/16	32.6			
45	---	---			
46	45 2/16	33.3			

5L Wattage

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
12	10 8/16	9.7	47	46 13/16	35.1
13	12	9.7	48	---	---
14	13 8/16	9.7	49	48 6/16	35.9
15	---	---	50	49 14/16	37.6
16	15 1/16	9.7	51	---	---
17	16 9/16	11.3	52	51 6/16	38.4
18	---	---	53	52 14/16	40.2
19	18 1/16	12.1	54	---	---
20	19 9/16	13.6	55	54 7/16	41.1
21	---	---	56	55 15/16	42.9
22	21 2/16	14.4	57	---	---
23	22 10/16	16.0	58	57 7/16	43.8
24	---	---	59	58 15/16	45.5
25	24 2/16	16.8	60	---	---
26	25 10/16	18.3	61	60 7/16	47.3
27	---	---	62	62	48.2
28	27 2/16	19.1	63	---	---
29	28 11/16	20.7	64	63 8/16	50.0
30	---	---	65	---	---
31	30 3/16	21.4	66	65	50.8
32	31 11/16	23.0	67	66 8/16	52.5
33	---	---	68	---	---
34	33 3/16	23.8	69	68 1/16	53.4
35	34 12/16	25.3	70	69 9/16	55.1
36	---	---	71	---	---
37	36 4/16	26.1	72	71 1/16	55.9
38	37 12/16	27.6			
39	---	---			
40	39 4/16	28.4			
41	40 13/16	30.1			
42	---	---			
43	42 5/16	30.9			
44	43 13/16	32.6			
45	---	---			
46	45 5/16	33.4			

FINISH

Silver



Black




Bronze



White



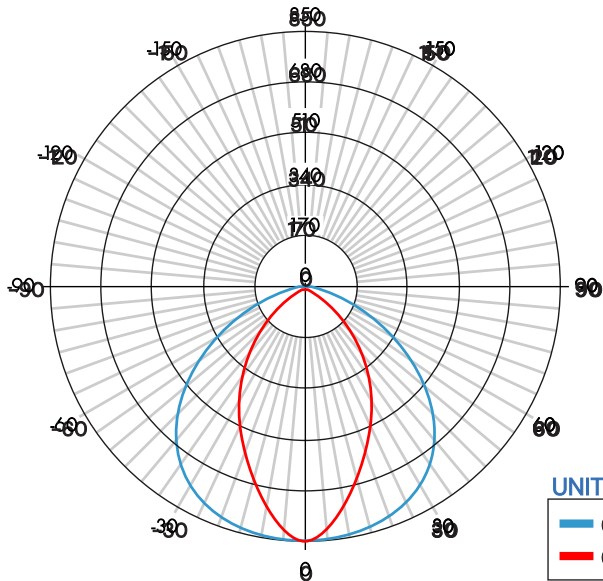


11704 -48-4L-40K-4-SA-XX

Zonal Lumen Summary 4000K


Zone	Lumen	% Fixture
0-30	582	35%
0-40	892	54%
0-60	1393	85%
0-90	1625	99%
0-180	1641	100%

Total

Beam Angle



Sample System Layout

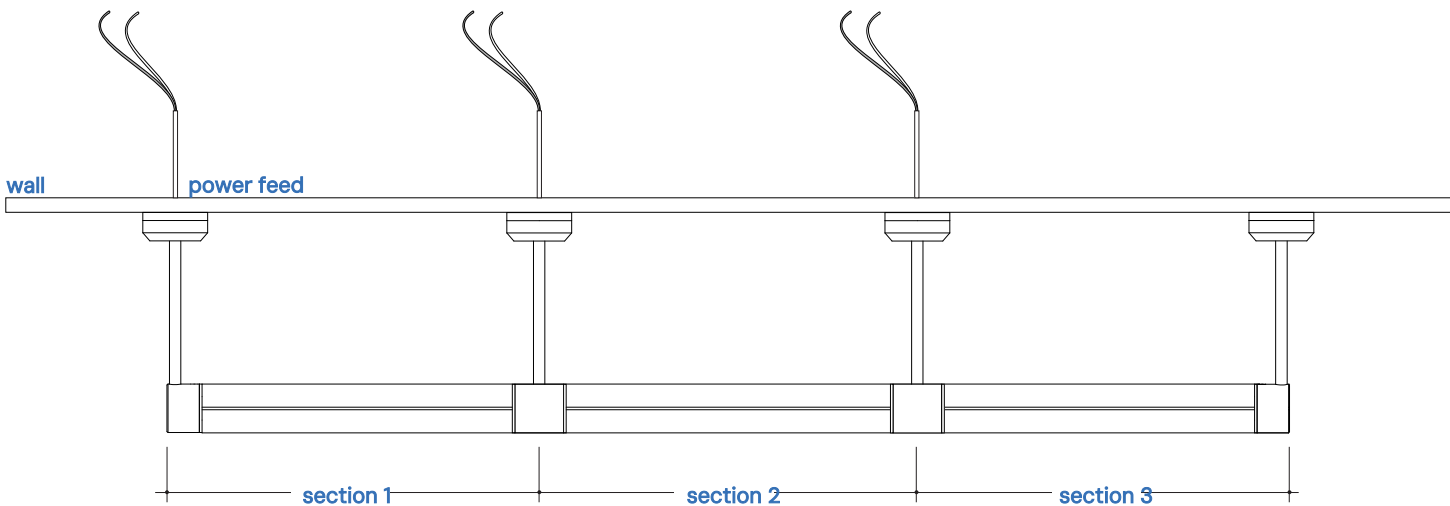

COLOR TEMPERATURE GUIDE

