

[SHOP NOW >](#)

Project Name: _____ Type: _____ Quantity: _____

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade VE Lighting 12033 Cambridge Architectural LED Linear Pendant Mount Direct/Indirect Light Fixture furnishes both clean lines and clarity to commercial LED office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

FEATURES

Construction: Anodized Aluminum

Lumens: 2100lms Direct, 4400lms Indirect

(30% Downlight / 70% Uplight)

Wattage: 20W Direct, 40W Indirect

CRI: 80

Voltage: 120-277VAC 50/60Hz

Dimming: 0-10V Dimmable

Operating Temperature: -13°F ~ 104°F (-25°C ~ 40°C)

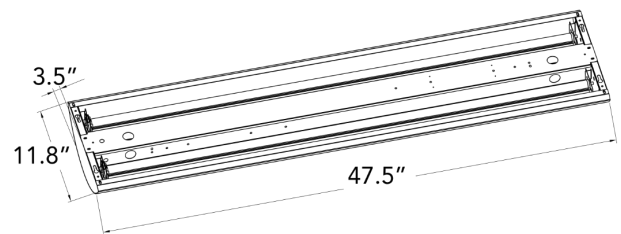
Life: 50,000 Hours

Power Factor: >0.95

Listings: UL Listed, IP20 Rated, LM79 Rated, Assembled in the US

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Comes standard with 6 Foot Adjustable Aircraft Cable

VE Lighting **12033** Cambridge Architectural LED Linear Pendant Mount Direct/Indirect Light Fixture

ORDERING INFORMATION Example: (12033-35K)

Model	Color Temp	Option	
12033	35K 3500K	Blank	6-Foot Aircraft Suspension Cable
	40K 4000K	SJTW100	100 Foot Reel of 5-Conductor 18 AWG Power Cable
	50K 5000K	EM8	8 Watt Internal Emergency Back-Up Battery