

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade **Continuum 20 Architectural Linear LED Suspension Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The integrated LED Continuum is available in standard lengths of 2', 4', and 8', and can be joined together in seamless runs of any length.

PRODUCT FAMILY

- 12100-20-P** | Pendant
- 12100-20-W** | Wall Mount
- 12100-20-S** | Surface
- 12100-20-R** | Recessed

AVAILABLE LENGTHS

- 2FT** | W 2.5" x L 24" x H 4"
- 4FT** | W 2.5" x L 48" x H 4"
- 8FT** | W 2.5" x L 96" x H 4"
- Continuous Run** | Consult Factory
- Custom Length** | Consult Factory

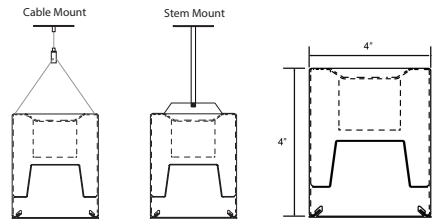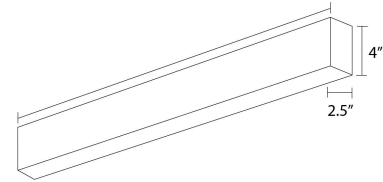

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Full Ability to Tandem Mount for Continuous Run Application, Equipped with Male & Female Quick Connect Harnesses
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Power Factor:** > .95
- THD:** < 20
- Life:** 100,000 Hours L70
- Universal Dimming:** TRIAC (Forward-Phase), ELV (Reverse-Phase), 0-10V
- Operating Temperature:** -4°F (-20°C) - 122°F (50°C)
- Emergency Lumens:** System Lumens x Emergency Wattage / System Wattage
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included), 10 Year Option Available
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards, UL Listed for Dry & Damp Location



ORDERING INFORMATION Example: (12100-20-P-D27-U18-S-4-30K-WH-AC48-1-8-LV-EM5)

| Model | Lumens (Direct Downlight) | Lumens (Indirect Uplight) | Shape | Size | Color Temp | Finish |
|------------------------------|--------------------------------------|--------------------------------------|-----------------------------|--------------------------------|--------------------|---|
| 12100-20-P Pendant | <i>Per 4 Foot Sections</i> | | S Single Unit | 2', 4', or 8' | <i>Residential</i> | WH White <small>Standard</small> BK Black SL Silver RAL Custom <small>Consult Factory</small> |
| | D27 27 watts 3300 lumens | (Blank) No Uplight | | | 27K 2700K | |
| | D36 36 watts 4600 lumens | U18 18 watts 3200 lumens | <i>Commercial</i> | 35K 3500K | 40K 4000K | |
| | D54 54 watts 6500 lumens | | <i>Industrial</i> | 40K 4000K | 50K 5000K | |
| | | | CR Continuous Run | Total Run (in Feet) | | |

| Mounting | Voltage | CRI | Controls | Options |
|--|---|--|---|---|
| AC48 <small>Standard</small> 48" Adjustable Aircraft Cable | 1 120 - 277V 3 347V 4 480V | 8 <small>Standard</small> 80+ CRI 9 90+ CRI | Optional LV Lutron VIVE™ Wireless LE Lutron EcoSystem™ BM Bluetooth Mesh | EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast OS Occupancy Sensor w/ Daylight Harvesting DS Daylight Dimming Photo Sensor Assembled ARRA in USA 10W 10 Years Limited Warranty |
| AC96 96" Adjustable Aircraft Cable | | | | |
| ST24 24" Stem | | | | |
| ST48 48" Stem | | | | |