

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade **Continuum 20 Architectural Trimless LED Linear Recessed Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior soffit lighting applications. Our modern, strip light profiles and stylish linear lighting designs offer excellent direct illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The integrated LED recessed lighting Continuum features a customizable design and is available in standard lengths of 2', 3', 4', 6', and 8'.

PRODUCT FAMILY

- 12100-20-P** | Pendant
- 12100-20-W** | Wall Mount
- 12100-20-S** | Surface
- 12100-20-R** | Recessed


AVAILABLE LENGTHS

- 2FT** | W 2.5" x L 24" x H 4"
- 3FT** | W 2.5" x L 36" x H 4"
- 4FT** | W 2.5" x L 48" x H 4"
- 6FT** | W 2.5" x L 72" x H 4"
- 8FT** | W 2.5" x L 96" x H 4"
- Continuous Run** | Consult Factory

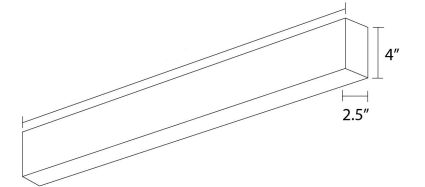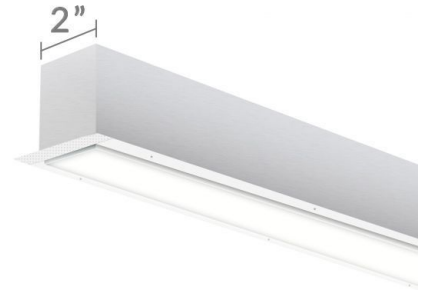

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Tandem Mount for Continuous Run Application, Equipped with Male & Female Quick Connect Harnesses
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (347V and 480V Available for Canadian Projects, Consult Factory)
- CRI:** 80+ (90+ available, Consult Factory)
- Power Factor:** > .95
- THD:** < 20
- Life:** 100,000 Hours L70
- Operating Temperature:** -4°F (-20°C) - 122°F (50°C)
- Emergency Lumens:** System Lumens x Emergency Wattage / System Wattage
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included), 10 Year Option Available
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards, UL Listed for Dry & Damp Location

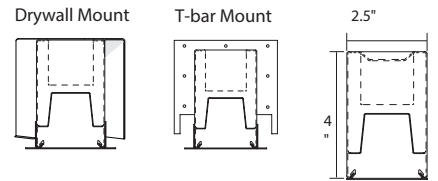

ORDERING INFORMATION Example: (12100-20-R-24-D18-30K-WH-010-D-LV-EM5)

Model	Lumens	Color Temp	Finish	Dimming Driver	Ceiling Type
12100-20-R-24 24" Recessed	D13 13 watts 1300 lumens	27K 2700K	WH White <small>Standard</small>	010 <small>Standard</small> 0 - 10V (100 - 1%)	T T-Bar Ceiling
	D18 18 watts 1800 lumens	30K 3000K	BK Black	ELV Electronic Low Voltage	D Drywall Hard Ceiling
	D27 27 watts 2700 lumens	35K 3500K 40K 4000K 50K 5000K	SL Silver RAL Custom <small>Consult Factory</small>	E5 Lutron EcoSystem™ 5-Series 5% E1 Lutron EcoSystem™ Hi-Lume 1% S50 50%-100% Step DALI 100% - 5%	SS Screw Slot Ceiling <small>*Only available for 4' and 8'</small>
12100-20-R-36 36" Recessed	D20 20 watts 2325 lumens				
	D27 27 watts 3075 lumens				
	D40 40 watts 4650 lumens				
12100-20-R-48 48" Recessed	D27 27 watts 3100 lumens				
	D36 36 watts 4100 lumens				
	D54 54 watts 6200 lumens				
12100-20-R-72 72" Recessed	D40 40 watts 4650 lumens				
	D54 54 watts 6200 lumens				
	D80 80 watts 9300 lumens				
12100-20-R-96 96" Recessed	D54 54 watts 6200 lumens				
	D72 72 watts 8200 lumens				
	D108 108 watts 12400 lumens				

Controls	Options
Optional LV Lutron VIVE™ Wireless	EM5 5W Emergency Ballast
LE Lutron EcoSystem™	EM8 8W Emergency Ballast
BM Bluetooth Mesh	EM16 16W Emergency Ballast
	OS Occupancy Sensor w/ Daylight Harvesting
	DS Daylight Dimming Photo Sensor
	ARRA Assembled in USA
	10W 10 Years Limited Warranty

Formerly: 14106 Beam 20