

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade **Continuum 2" Architectural LED Linear Surface Mount Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior flush mount lighting applications. Our modern, slim profiles and stylish ceiling light fixture designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The integrated LED surface mount Continuum is available in standard lengths of 2', 4', and 8', and can be joined together in seamless runs of any length.

PRODUCT FAMILY


- 12100-20-P** | Pendant
- 12100-20-W** | Wall Mount
- 12100-20-S** | Surface
- 12100-20-R** | Recessed

AVAILABLE LENGTHS

- 2FT** | W 2.5" x L 24" x H 4"
- 3FT** | W 2.5" x L 36" x H 4"
- 4FT** | W 2.5" x L 48" x H 4"
- 6FT** | W 2.5" x L 72" x H 4"
- 8FT** | W 2.5" x L 96" x H 4"
- Continuous Run** | Consult Factory

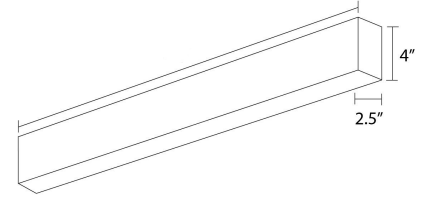

Surface Mount



FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Tandem Mount for Continuous Run Application, Equipped with Male & Female Quick Connect Harnesses
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (347V and 480V Available for Canadian Projects, Consult Factory)
- CRI:** 80+ (90+ available, Consult Factory)
- Universal Dimming:** TRIAC (Forward-Phase), ELV (Reverse-Phase), 0-10V
- Power Factor:** > .95
- THD:** < 20
- Life:** 100,000 Hours L70
- Operating Temperature:** -4°F (-20°C) - 122°F (50°C)
- Emergency Lumens:** System Lumens x Emergency Wattage / System Wattage
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included), 10 Year Option Available
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards, UL Listed for Dry & Damp Location



ORDERING INFORMATION Example: (12100-20-S-24-D18-30K-WH-8-LV-EM5)

Model	Lumens
12100-20-S-24 24" Surface	D13 13 watts 1300 lumens D18 18 watts 1800 lumens D27 27 watts 2700 lumens
12100-20-S-36 36" Surface	D20 20 watts 2325 lumens D27 27 watts 3075 lumens D40 40 watts 4650 lumens
12100-20-S-48 48" Surface	D27 27 watts 3100 lumens D36 36 watts 4100 lumens D54 54 watts 6200 lumens
12100-20-S-72 72" Surface	D40 40 watts 4650 lumens D54 54 watts 6200 lumens D80 80 watts 9300 lumens
12100-20-S-96 96" Surface	D54 54 watts 6200 lumens D72 72 watts 8200 lumens D108 108 watts 12400 lumens

Color Temp	Finish	CRI
Residential 27K 2700K 30K 3000K	WH White <i>Standard</i> BK Black SL Silver	8 <i>Standard</i> 80+
Commercial 35K 3500K 40K 4000K	RAL Custom <i>Consult Factory</i>	9 90+
Industrial 50K 5000K		

Controls	Options
Optional LV Lutron VIVE™ Wireless	EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast
LE Lutron EcoSystem™	OS Occupancy Sensor w/ Daylight Harvesting
BM Bluetooth Mesh	DS Daylight Dimming Photo Sensor
	ARRA Assembled in USA
	10W 10 Years Limited Warranty