


### FIXTURE SPECIFICATIONS

#### INTENDED USE



Install our architectural-grade, pentagon-shaped LED pendant light, available in black, white and silver with a range of lumens outputs, for streamlined downlight to commercial, hospitality and residential interiors. This product, made with diecast metal in the U.S.A, affords clear, ample wall wash light. Includes glare-free, snap-in frosted lens and aircraft cable suspension.

#### FEATURES


- Construction:** Die-Cast Extruded Aluminum Body
- Aircraft Cable Length:** 144"
- Lens:** Glare Free Snap-in Frosted Lens
- Voltage:** 120-277V 50/60 Hz
- Power Factor:** >0.90
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** Made in the USA

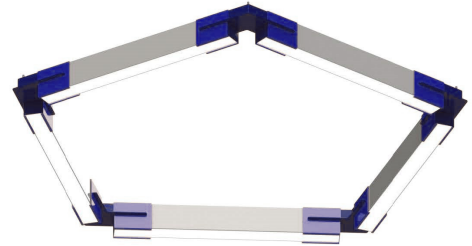

### BRACKET DIMENSIONS

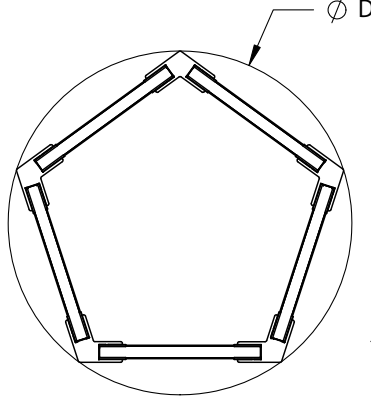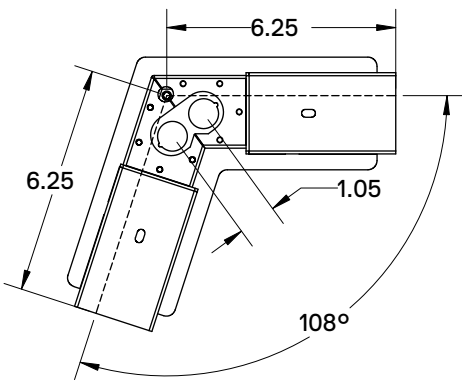

Diameter	L
SM	57"
MD	92"
LG	133"
XL	174"

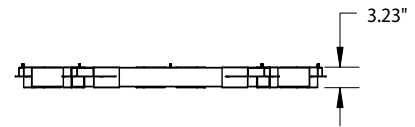

### ORDERING INFORMATION Example: (12100-23-PG-SM-D60-WH-BK-30K-8)

Model	Diameter	Downlight	Uplight	Finish	Connector Finish <sup>1</sup>	Color Temp	CRI	Options
<b>12100-23-PG</b>			<b>(Blank)</b> Downlight Only	<b>WH</b> White	<b>BK</b> Black	<b>30K</b> 3000K	<b>8</b> <small>Standard</small> 80+ CRI	<b>EM14</b> Integrated 14W
	<b>SM</b> 57"	<b>D100</b> 100W   11500 lum	<b>U60</b> 60W   6900 lum	<b>BK</b> Black	<b>GBK</b> Glossy Black	<b>35K</b> 3500K	<b>9</b> 90+ CRI	Emergency Battery Backup
	<b>MD</b> 92"	<b>D200</b> 200W   23000 lum	<b>U120</b> 120W   13800 lum	<b>SL</b> Silver	<b>SL</b> Silver	<b>40K</b> 4000K		<b>AB</b> Separate down and up dimming
	<b>LG</b> 133"	<b>D300</b> 300W   34500 lum	<b>U180</b> 180W   20700 lum	<b>IR</b> Iron	<b>IR</b> Iron	<b>50K</b> 5000K		
	<b>XL</b> 174"	<b>D400</b> 400W   46000 lum	<b>U240</b> 240W   27600 lum	<b>YL</b> Yellow	<b>YL</b> Yellow			
				<b>OR</b> Orange	<b>OR</b> Orange			
				<b>RD</b> Red	<b>RD</b> Red			
				<b>BL</b> Blue	<b>BL</b> Blue			



<sup>1</sup> End Caps will also match Connector Finish

Available Finishes

Fixture Finishes



Junction & End Cap Finishes



## COLOR TEMPERATURE GUIDE



2700K	3000K	3500K	4000K	5000K
<b>WARM WHITE</b>	<b>SOFT WHITE GLOW</b>	<b>NEUTRAL GLOW</b>	<b>COOL WHITE GLOW</b>	<b>DAYLIGHT GLOW</b>
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✗	✓	✓	✓	✓