



INSTALLATION INSTRUCTIONS

1. Place and align fixtures on the floor below exactly where it is going to be mounted in numerical order keeping the same alphabet family (for continuous).
2. Make sure to keep top of each wall mount bracket aligned, and fix onto the wall through two small openings indicated in circles below. (Each fixture requires two wall mount brackets).

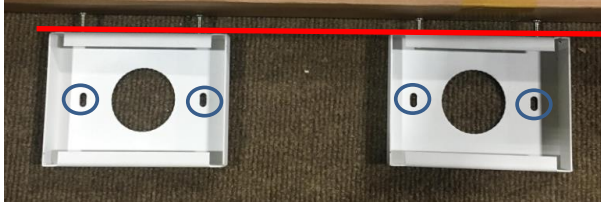


3. Remove lens and module plates from fixture.
 12100-23: 3ft and 4ft fixture has total of 2 screws and 8ft fixture has total of 5 screws to be removed.
 12100-44: 3ft and 4ft fixture has total of 4 screws and 8ft fixture has total of 8 screws to be removed.

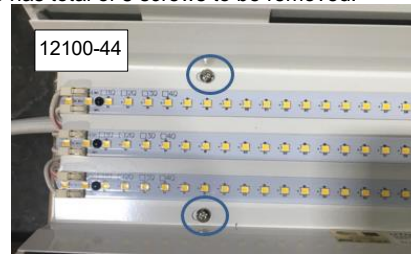

4. Look for 4 openings on the side of the fixture ready for wall mount bracket installation and use bolt and nut to fix and secure the other part of wall mount bracket.



5. Complete wall mount bracket installation.




Lock wall mount bracket

Make sure the level of the fixture and wall mount bracket is aligned as shown in this image.

INSTALLATION INSTRUCTIONS

6. **[CONTINUOUS ONLY]** Once all empty fixtures are installed on the wall in order, secure fixtures into continuous run with 4 screws at each joint. (There should be 2 screws pre-installed on each end for use).

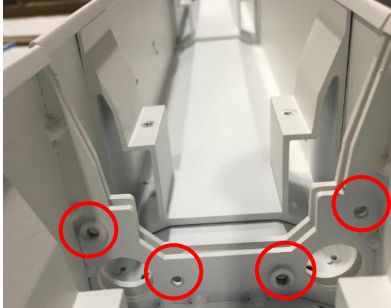

7. **[CONTINUOUS ONLY]** Reinstall module plate one by one and connect male and female disconnectors of matching colored-wires, and tuck it under the module plate.



8. Complete installation by reinstalling the module plate and lens.