

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

This linear pendant or surface-mounted LED light delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting. The modern, slim profile comes in standard lengths of 2, 3, 4 and 8-feet but is available for continuous runs of any length. Excellent illumination, exceptional performance and versatility for offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

### FEATURES

**Construction:** Extruded aluminum housing Powder coat finish

**Dimming:** Standard 1-10V dimming down to 10%. Optional 1-10V dimming down to 1% available.

**Wattage:** Wattage selectable from 10W/7.5W/5W per FT

**Color Temperature:** CCT adjustable from 3000K, 3500K, 4000K.

Must select color temperature for Micro Reflector optics

**Light Distribution:** Adjustable via dip switch


**Voltage:** 110-277

**CRI:** 80+


**Life:** 50,000 Hours

**Warranty:** 5 Years Free of Defects in Materials & Craftsmanship

**Listings:** cULus listed for damp locations

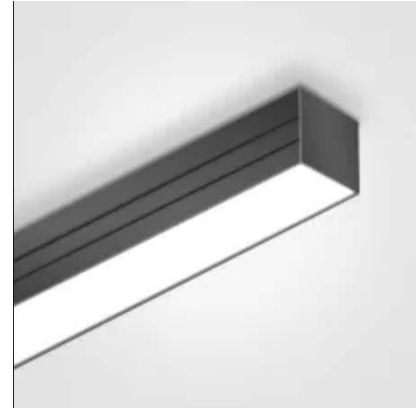

W 3.74"



#### Light distribution options via DIP switch

- 100% Uplight
- 100% Downlight
- 50% down, 50% up
- 70% down, 30% up
- 10% down, 90% up
- 30% down, 70% up
- 90% down, 10% up

Optics	Length	UP/DOWN @3500K (Base on 50%Up/50%Down)			100%DOWN@3500K		
		High	Medium	Low	High	Medium	Low
Flat Lens	2',3',4',8'	1200lm/ft, 10w/ft	900lm/ft, 7.5w/ft	600lm/ft, 5w/ft	1100lm/ft, 10w/ft	800lm/ft, 7.5w/ft	550lm/ft, 5w/ft
Regressed Lens	2',3',4',8'	1000lm/ft, 10w/ft	750lm/ft, 7.5w/ft	500lm/ft, 5w/ft	900lm/ft, 10w/ft	670lm/ft, 7.5w/ft	450lm/ft, 5w/ft



### ORDERING INFORMATION Example: (12100-33-P-2-D-CTS-W-DJ-5W-R)










Model	Mouting	Length	Optics	Color Temp	Finish	Ceiling Type	Pendant Type	Canopy	Options
<b>12100-33</b>	<b>P</b> Pendant <b>S</b> Surface <b>R</b> Recessed <b>W</b> Wall	<b>2</b> 2 Foot <b>3</b> 3 Foot <b>4</b> 4 Foot <b>8</b> 8 Foot	<b>D</b> Standard Flat Diffuser <b>R</b> Regressed	<b>CTS</b> Color Temperature Switch (30K/35K/40K)	<b>W</b> White <b>B</b> Black <b>RAL#</b> See Pg. 2 for custom finishes	<b>DJ</b> Standard Dry Wall J-Box Mount <b>D9/15</b> Drop Ceiling Clips for 9/16" and 15/16" Flat Ceiling <b>D9S</b> Drop Ceiling Clips for 9/16" Slot Ceiling <b>D15</b> Drop Ceiling Clips for 15/16" Slot Ceiling	<b>(Blank)</b> Not Required <b>5W</b> Standard 5 ft white power cord + 5ft aircraft cable <b>5B</b> 5 ft black power cord + 5ft aircraft cable <b>12W</b> 12 ft white power cord + 12ft aircraft cable <b>12B</b> 12 ft black power cord + 12ft aircraft cable	<b>R</b> Standard Round <b>S</b> Square	<b>D1</b> 1-10V Dimming down to 1% <b>O</b> Occupancy Sensor <b>IEM</b> 8W Internal Emergency Back-up Battery

1 Only for round canopy










## CUSTOM FINISHES



Set up fee and longer lead time will be applied on non-standard finishes.

### Metropolitan

	Silver	RAL #9022
	Asher Grey	RAL #7004
	Mason	RAL #7039
	Slate	RAL #7031
	Tech Grey	RAL #7016
	Chocolate Spice	RAL #8017
	Urban Native	RAL #8025
	Carmin	RAL #8028
	Reseda Green	RAL #6011

### Vibrant

	Violet Dreams	RAL #4006
	Purple Red	RAL #3004
	Carmine Red	RAL #3002
	Rose	RAL #3017
	Pure Orange	RAL #2004
	Traffic Yellow	RAL #1023
	Daisy	RAL #1018
	Antique Spring	RAL #6019
	Island Skye	RAL #6027
	Sky Blue	RAL #5015

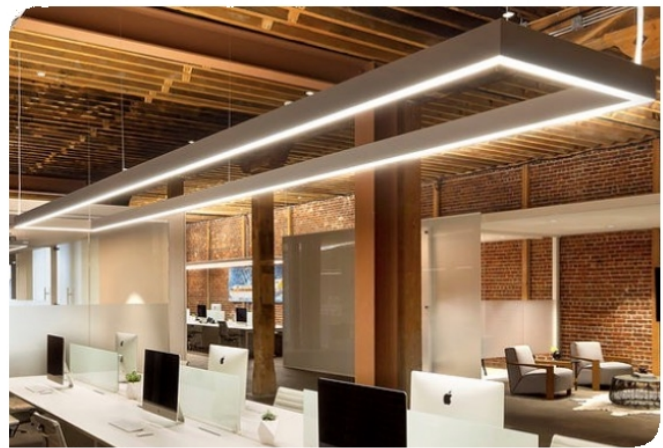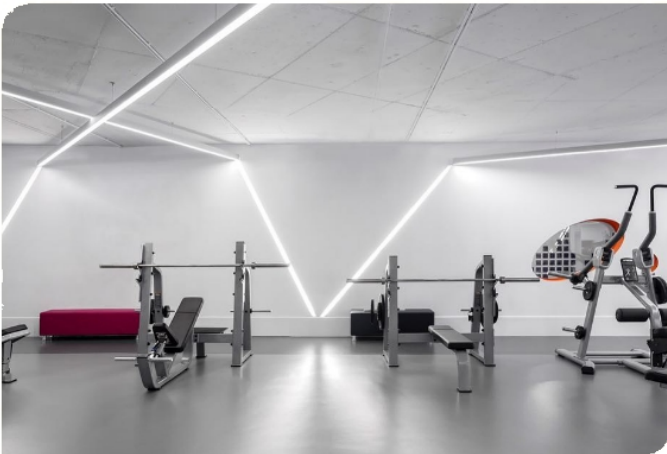

## AVAILABLE CANOPIES



1.6" Round  
(Non Power Feed)



4.5" Round  
(Power Feed)



4.5" Round With  
Emergency  
Driver  
(Non Power Feed)



5.8" Round  
With  
Occupancy  
Sensor  
(Power Feed)



1.6" Square  
(Non Power Feed)



4.5" Square  
(Power Feed)



4.5" Square With  
Emergency  
Driver  
(Non Power Feed)

## COLOR TEMPERATURE GUIDE

