

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Continuum 23 LED Recessed Mount Architectural Linear Luminaire** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The integrated LED Continuum is available in standard lengths of 2', 4', and 8', and can be joined together in seamless runs of any length.

PRODUCT FAMILY



- 12100-23-P** | Pendant Mount
- 12100-23-W** | Wall Mount
- 12100-23-S** | Surface Mount
- 12100-23-R** | Recessed Mount

AVAILABLE LENGTHS

- 2FT** | W 2" x L 24" x H 3"
- 4FT** | W 2" x L 48" x H 3"
- 6FT** | W 2" x L 72" x H 3"
- 8FT** | W 2" x L 96" x H 3"
- Continuous Run** | Consult Factory
- Custom Length** | Consult Factory

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Run:** Full Ability to Tandem Mount for Continuous Run Application, Equipped with Male & Female Quick Connect Harnesses
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Dimming:** 5-Wire 0-10V (100%-10%), 3-Wire Electronic Low Voltage (100%-1%)
- CRI:** 80+ & 90+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

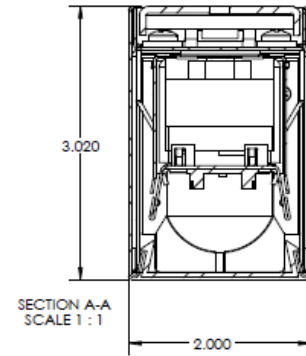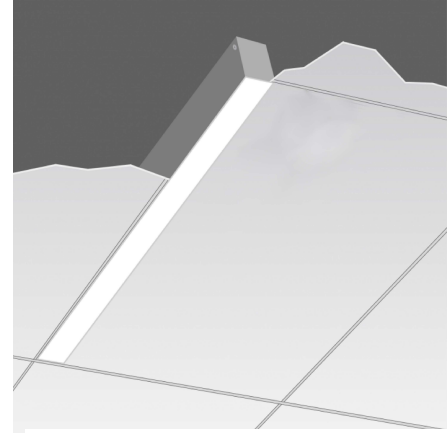

ORDERING INFORMATION Example: (12100-23-R-D-R26-RC-8x8-27K-WH-D10-EM)

Model	Distribution	Lumen Output	Shape	Finish	Color Temp	Dimming Driver
12100-23 2" x 3"	R Recessed T-Bar RF Recessed Flanged RTL Recessed Trimless	D Direct Per 4 Foot Sections R26 26 watts 2600 lms R38 38 watts 3800 lms R45 45 watts 4500 lms	S Single Unit CR Continuous Run RC Rectangle SQ Square	Standard WH White BK Black SL Silver Premium RD Red BL Blue GR Green OR Orange SB Satin Brass	Residential 27K¹ 2700K 30K 3000K Commercial 35K 3500K 40K 4000K Industrial 50K 5000K	010 Standard 0-10V (100 - 1%) ELV Electronic Low Voltage (100%-1%)
			Total Run (in Feet) 	Options EM Remote Emergency Backup Battery (4ft canopy) DS Daylight Sensor OS Occupancy Sensor	Controls Optional LV Lutron VIVE™ Wireless LE Lutron EcoSystem™ BM Bluetooth Mesh	
			Width Length 			
			Width Length 			
			CU² Custom 			

Formerly: 12104 Beam 23

¹ 90+ CRI