

Project Name:

Type:

Quantity:

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

The architectural-grade linear LED ceiling light can be pendant suspended or surface-mounted for commercial lighting applications, including office buildings, medical facilities, conference rooms, hospitality, hotels and retail spaces. The linear ceiling light provides 5,000 lumens of high-CRI LED light and comes in standard lengths of 4-foot and 8-foot and come be seamlessly connected for continuous runs of any length.

**PRODUCT FAMILY**

**12100-33-P** | Pendant  
**12100-33-S** | Surface

**AVAILABLE LENGTHS**


**4FT** | W 3.5" x L 48" x H 3.3"  
**8FT** | W 3.5" x L 96" x H 3.3"  
**Continuous Run** | Consult Factory

**FEATURES**

- Construction:** Die-formed and welded 22-gauge cold rolled ateeel
- Continuous Run:** Full ability to tandem mount for continuous run application equipped with male & female quick connect harnesses
- Finish:** Silver
- Lens:** Glare-free snap-in frosted acrylic for even distribution
- Voltage:** 120-277V
- Wattage:** 45 watts per 4-foot section
- Lumens:** 5040 lumens per 4-foot section
- Dimming:** 5-Wire 0-10V (100%-10%)
- CRI:** 80+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years carefree for parts & components (Labor not included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

Pendant





Surface

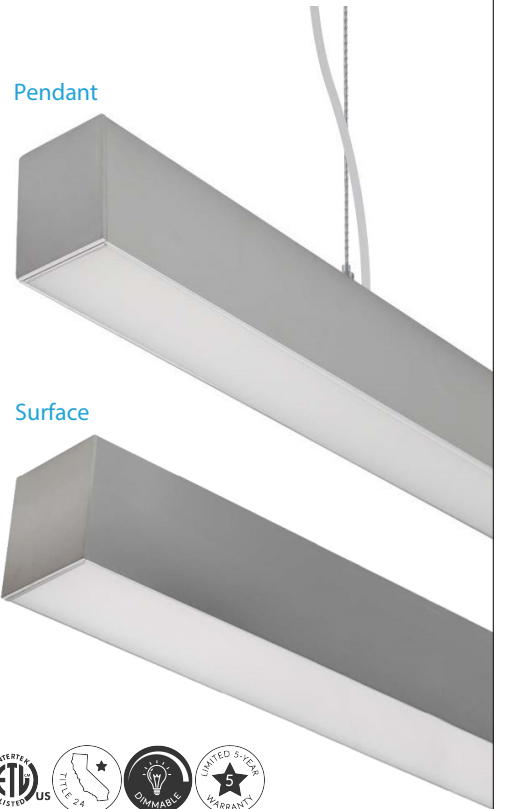

**ORDERING INFORMATION** Example: (12100-33-P-30K-S-4-AC72)

Model	Mount Type	Color Temp
<b>12100-33</b>	<b>P</b> Pendant	<b>30K</b> 3000K
	<b>S</b> Surface	<b>40K</b> 4000K

Shape	Size	Pendant Mount
<b>S</b> Single Unit	<b>4' or 8'</b>	<b>AC72</b> 72" Adjustable Aircraft Cable (x2)
<b>CR</b> Continuous Run	<b>Total Run (in Feet)</b>	<b>AC144</b> 144" Adjustable Aircraft Cable (x2)

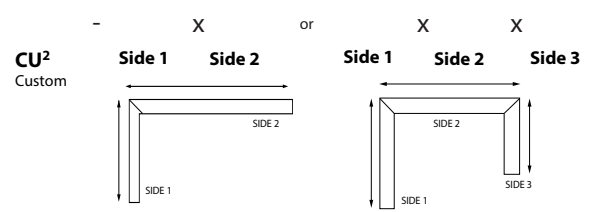

Alcon 12100-33 Linear Pendant or Surface-Mounted LED Ceiling Light