

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The architectural-grade linear LED ceiling light can be pendant suspended or surface-mounted for commercial lighting applications, including office buildings, medical facilities, conference rooms, hospitality, hotels and retail spaces. The linear ceiling light provides 5,000 lumens of high-CRI LED light and comes in standard lengths of 4-feet and 8-feet and come be seamlessly connected for continuous runs of any length.

PRODUCT FAMILY

12100-33-P | Pendant
12100-33-S | Surface

AVAILABLE LENGTHS

4FT | W 3.5" x L 48" x H 3.3"
8FT | W 3.5" x L 96" x H 3.3"
Continuous Run | Consult Factory

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Continuous Run: Full ability to tandem mount for continuous run application equipped with male & female quick connect harnesses

Finish: Silver

Lens: Glare-free snap-in frosted acrylic for even distribution

Voltage: 120-277V

Wattage: 45 watts per 4-foot section

Lumens: 5040 lumens per 4-foot section

Dimming: 5-Wire 0-10V (100%-10%)


CRI: 80+

Life: 50,000 Hours L70

Warranty: 5 Years carefree for parts & components (Labor not included)




Listings: CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

ORDERING INFORMATION Example: (12100-33-P-30K-S-4-AC72)

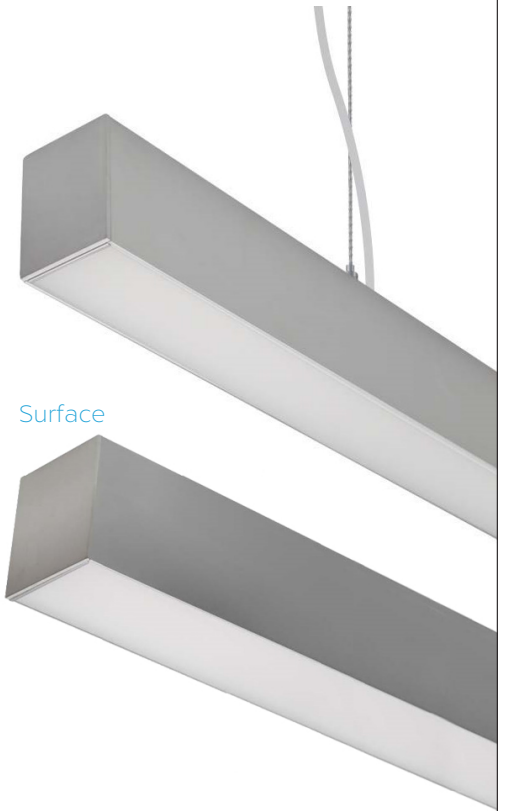

Surface

Alcon Lighting 12100-33 Linear Pendant or Surface-Mounted LED Ceiling Light

Model	Mount Type	Color Temp	Shape	Size	Pendant Mount
12100-33	P Pendant	30K 3000K	S Single Unit	4' or 8'	AC72 72" Adjustable Aircraft Cable (x2)
	S Surface	40K 4000K	CR Continuous Run	Total Run (in Feet) 	AC144 144" Adjustable Aircraft Cable (x2)
			RC Rectangle	Width x Length 	
			SQ Square	Width x Length 	
			CU ² Custom	Side 1 x Side 2 or Side 1 x Side 2 x Side 3 