

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade **Continuum 44 Architectural LED Linear Square Pendant Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, hanging light fixtures and stylish linear chandelier designs offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY

12100-S-44-SQ | Surface Mount

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel 1/2" Regressed Bottom Flange for Uniformity and Rigidity
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- White**
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Universal Dimming:** TRIAC (Forward-Phase), ELV (Reverse-Phase), 0-10V
- Life:** 50,000 Hours L70
- CRI:** 80+ / 90
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

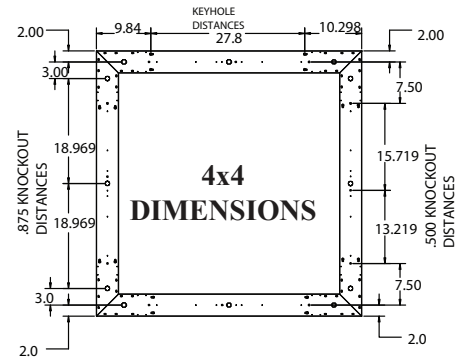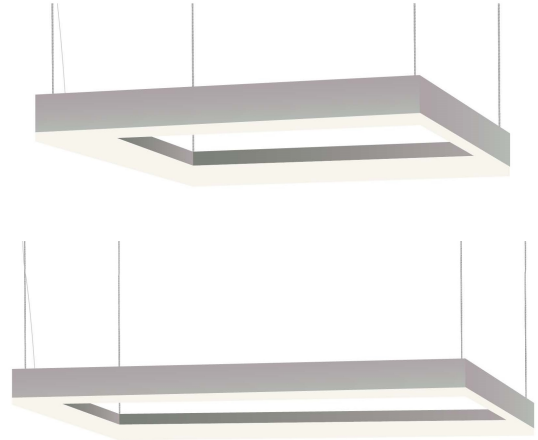

ORDERING INFORMATION

Example: (12100-P-44-D-R24-SQ-4x4-30K-8-AC48-WH-WH-SEM)

Model	Size	Distribution	Lumen Output	Shape
12100-P	44 4" x 4"	D Direct I Indirect	(Per 4 Foot Sections) R24 24 watts 2400 lms	SQ Square
			R48 48 watts 4800 lms	

Color Temp	CRI	Mounting	Finish	Power Cord	Options
27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	8 Standard 80+ CRI 9 90+ CRI	AC48² 48" Adjustable Aircraft Cable (x2) AC144² 144" Adjustable Aircraft Cable (x2) ST24² 24" Stem (x2) STXX² Custom Stem Length ³	WH Standard White BK Black SL Silver SB Satin Brass BL Blue OR Orange GR Green RD Red RAL Consult Factory	WH White BK Black	SEM Single Side Internal Emergency Pack (10W 1000 lms) DEM Dual Side Internal Emergency Pack (20W 2000 lms)

¹90 CRI
²0.4" Thick 5-Conductor Power Cable (x1)
³5" Round Canopy (x2)

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade **Continuum 44 Architectural LED Linear Square Surface Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, hanging light fixtures and stylish linear chandelier designs offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY

12100-P-44-SQ | Pendant Mount

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
1/2" Regressed Bottom Flange for Uniformity and Rigidity
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Universal Dimming:** TRIAC (Forward-Phase), ELV (Reverse-Phase), 0-10V
- Life:** 50,000 Hours L70
- CRI:** 80+ / 90
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

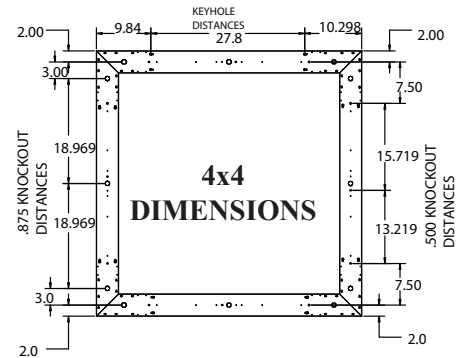

ORDERING INFORMATION

Example: (12100-44-S-D-R24-SQ-4x4-30K-8-WH-WH-SEM)

Model	Size	Distribution	Lumen Output	Shape	
12100-S	44 4" x 4"	D Direct	(Per 4 Foot Sections) R24 24 watts 2400 lms R48 48 watts 4800 lms	SQ Square	<div style="text-align: center;">X</div> <div style="display: flex; justify-content: space-around;"> Width Length </div>
				RC Rectangle	<div style="text-align: center;">X</div> <div style="display: flex; justify-content: space-around;"> Width Length </div>
Color Temp	CRI	Finish	Power Cord	Options	
<i>Residential</i> 27K 2700K 30K 3000K <i>Commercial</i> 35K 3500K 40K 4000K <i>Industrial</i> 50K 5000K	8 Standard 80+ CRI 9 90+	WH Standard White BK Black SL Silver SB Satin Brass BL Blue OR Orange GR Green RD Red RAL Consult Factory	WH White BK Black	SEM Single Side Internal Emergency Pack (10W 1000 lms) DEM Dual Side Internal Emergency Pack (20W 2000 lms)	

¹90 CRI
²0.4" Thick 5-Conductor Power Cable (x1)
 5" Round Canopy (x2)