

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE


Made in die-formed and welded 22-gauge, cold-rolled steel with the capacity to tandem mount for a continuous run application, our high-CRI LED product is made to last, making this direct/indirect light perfect for commercial, hospitality and residential interiors. Offered with pre-fabricated and fully illuminated corners and a frosted, acrylic glare-free lens that snaps in, the powerful, versatile commercial-grade product suits today's office, classroom, conference room, museum, retailer, hotel and restaurant.

PRODUCT FAMILY

- 12100-66-P | Pendant Mount
- 12100-66-W | Wall Mount
- 12100-66-S | Surface Mount
- 12100-66-R | Recessed Mount


AVAILABLE LENGTHS

- 4FT | W 6" x L 48" x H 6"
- 8FT | W 6" x L 96" x H 6"
- Continuous Run | Consult Factory
- Custom Length | Consult Factory

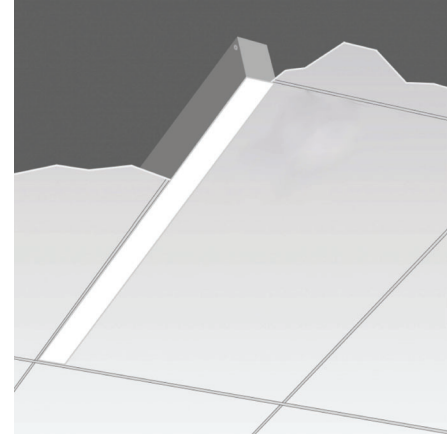

FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Continuous Run:** Full ability to tandem mount for continuous run application equipped with male & female quick connect harnesses
- Mounting:** For most effective indirect lighting result, mount at no less than 18" from the ceiling
- Custom Design:** Offered with pre-fabricated and fully illuminated corners
- Lens:** Glare-free snap-in frosted acrylic for even distribution
- Voltage:** 120-277V (50/60 Hz) Constant current
- Universal Dimming:** TRIAC (Forward-phase), ELV (Reverse-phase), 0-10V
- CRI:** 80+ & 90+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years carefree for parts & components (Labor not included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

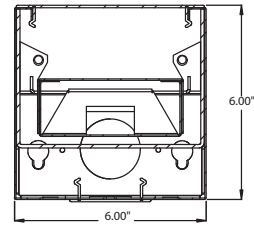


Alcon 12100-66-R Linear Recessed LED Downlight

ORDERING INFORMATION Example: (12100-66-R-D-R24-RC-8x8-WH-27K-8-EM)

Model	Mount	Distribution	Lumen Output	Finish	Color Temp	CRI	
12100-66 6" x 6"	R Recessed T-Bar	D Direct	Per 4 Foot Sections	S Single Unit	4' or 8'	8 Standard	
		WW Wall Wash	R24 24 watts 2400 lms				
	RF Recessed Flanged		R48 48 watts 4800 lms				
		RTL Recessed Trimless					
		CR Continuous Run	Total Run (in Feet)				
		RC Rectangle	Width Length				
		SQ Square	Width Length				

Finish	Color Temp	CRI
Standard	Residential	8 Standard
WH White	27K¹ 2700K	80+ CRI
BK Black	30K 3000K	9
SL Silver	Commercial	90+
Premium	35K 3500K	
RD Red	40K 4000K	
BL Blue	Industrial	
GR Green	50K 5000K	
OR Orange		
SB Satin Brass		

Options	Controls
EM Remote Emergency Backup Battery (4ft canopy)	Optional
DS Daylight Sensor	LV Lutron VIVE™ Wireless
OS Occupancy Sensor	LE Lutron EcoSystem™
	BM Bluetooth Mesh

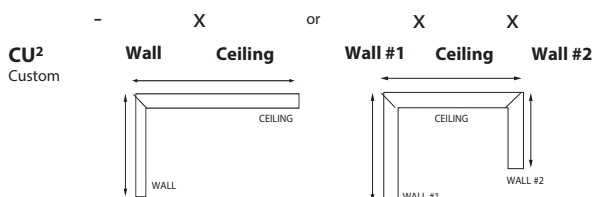

¹ 2700K Only Available in 90+ CRI