SPECIFICATION SHEET

Shop Now

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Our semi-rigid LED light is a IP65 rated flexible LED fixture designed to be used in environments to create stunning 360 Degree illuminating designs . Suitable for indoor or outdoor applications, the flexible 360 Degree light offers many mounting such as horizontal or vertical surface and pendant.

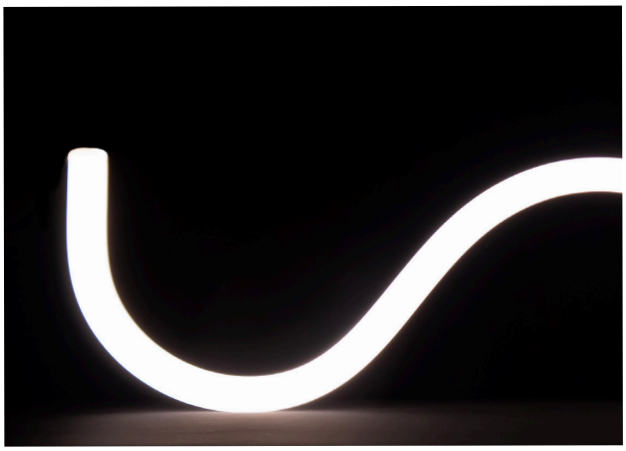

FEATURES

Construction: Factory-Installed Power Feed. Injection Moulded End-Caps
Lens: High performance acrylic optic securely attached to internal heat sink for maximum thermal dissipation
Voltage: 24V LED Fixture, 100-277V LED Driver
Remote Driver: Dimmable 4-in-1 Triac, ELV, MLV & 0-10V
Wattage: 4.4W per Ft
Lumen: 317 lm per Ft (30K)
CRI: 90+
Life: 50,000 hours
Max Run Length: 16 Ft.
Beam Angle: 360 Degree
Operating temperature: -13°F ~131°F (-25°C ~ 55°C)
Listings: cULus listed, RoHS, Suitable for wet location, IP65 Rated, Flame Resistant, UV Resistant, Assembled in USA
Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

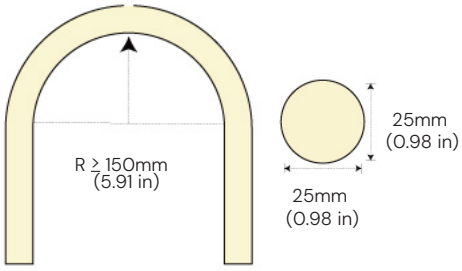

Minimum Bend Radius

Mounting Options

AC
Arch Surface

VS
Vertical Surface



VP
Vertical Pendant



HP
Horizontal Pendant



HTP
Horizontal Telescopic Pendant

ORDERING INFORMATION EXAMPLE: (12103-2-SR-VS-27K)

Model	Length		Power Feed		Mounting		Color Temp		RGB Controls		Options	
12103	2	2 Foot	SR	Side Feed	AC	Arch Surface	24K	2400K	(Blank)	Not Required	VMC	Visible Mounting Clip
	4	4 Foot	EF	End Feed	VS	Vertical Surface	27K	2700K	WIFI	Mobile Application + WiFi	DMB	Discreet Mounting Bracket
	6	6 Foot			VP	Vertical Pendant	30K	3000K	RF	RF Remote Control (White)	IJ	Infinity Joiner
	8	8 Foot			HP	Horizontal Pendant	40K	4000K	DMX	DMX Wall Control (White)		
	XX	Custom Length *Replace XX with length in Inches*			HTP	Horizontal Telescopic Pendant	RGB	RGB	DMX-W-WIFI	DMX Wall Control (White) + WiFi		
									DMX-B-WIFI	DMX Wall Control (Black) + WiFi		

LINE DRAWINGS

Arch Surface (AC)



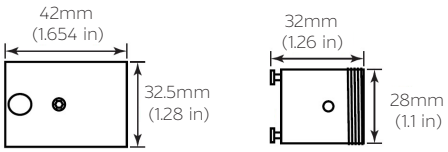

MOUNT CAP 1

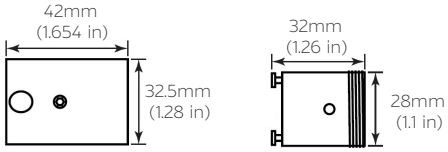

MOUNT CAP 2

Vertical Surface (VS)



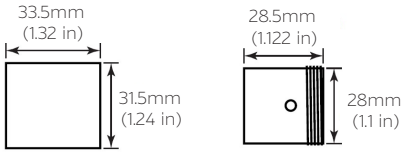

END CAP

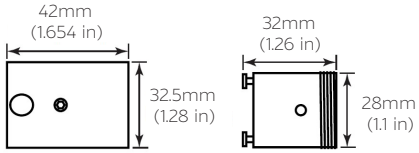

CEILING MOUNT

Vertical Pendant (VP)



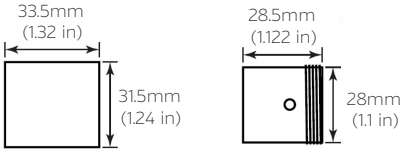

END CAP



SUSPENDED PENDANT *
Cable Length = 72"

Horizontal Pendant (HP)







* 72" Cable included



Horizontal Telescopic Pendant (HTP)



* 13 - 24" Extension





ACCESSORIES

VISIBLE MOUNTING CLIP (VMC)



DISCREET MOUNTING BRACKET (DMB)





INFINITY JOINER (IJ)



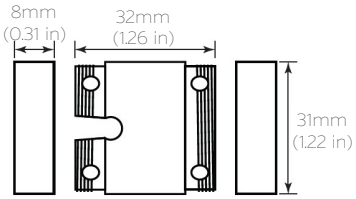

END FEED DIMENSIONS

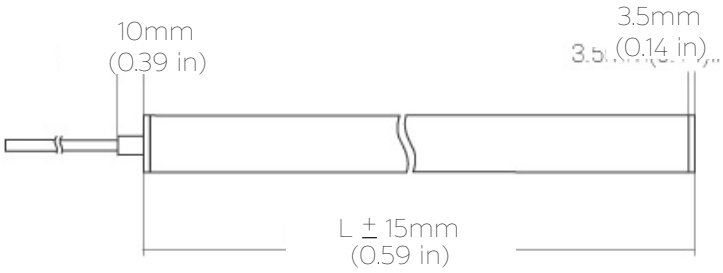

END FEED

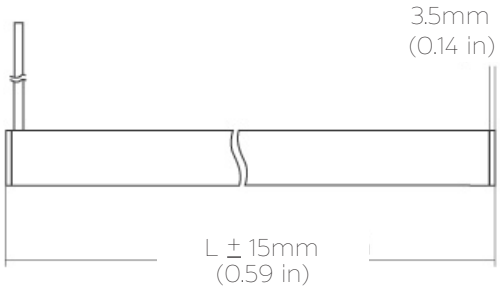

SIDE FEED

POWER SUPPLY

4N1-30W-24V



4N1-60W-24V

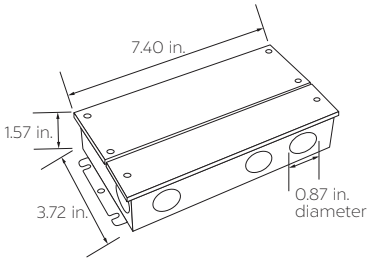

4N1-96W-24V

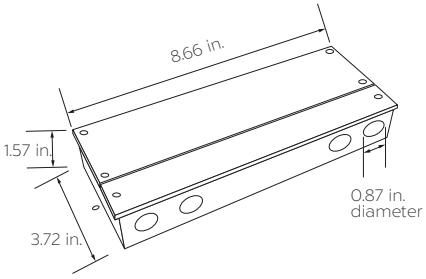

4N1-150W-24V

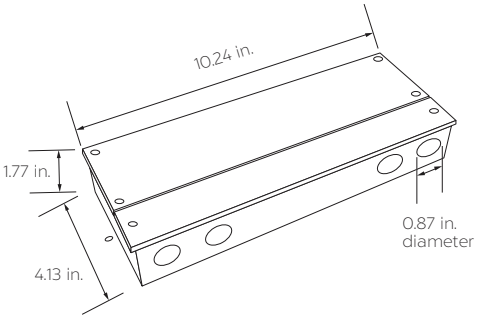

4N1-200W-24V

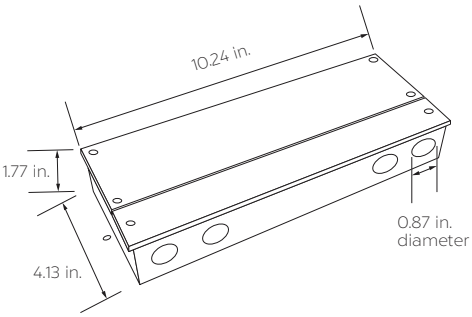

4N1-300W-24V

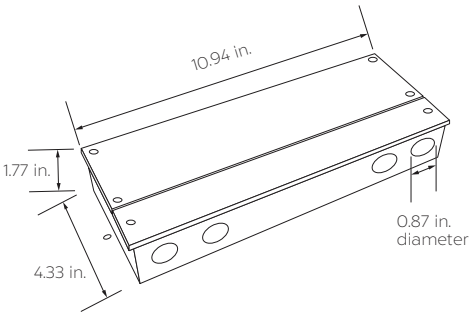
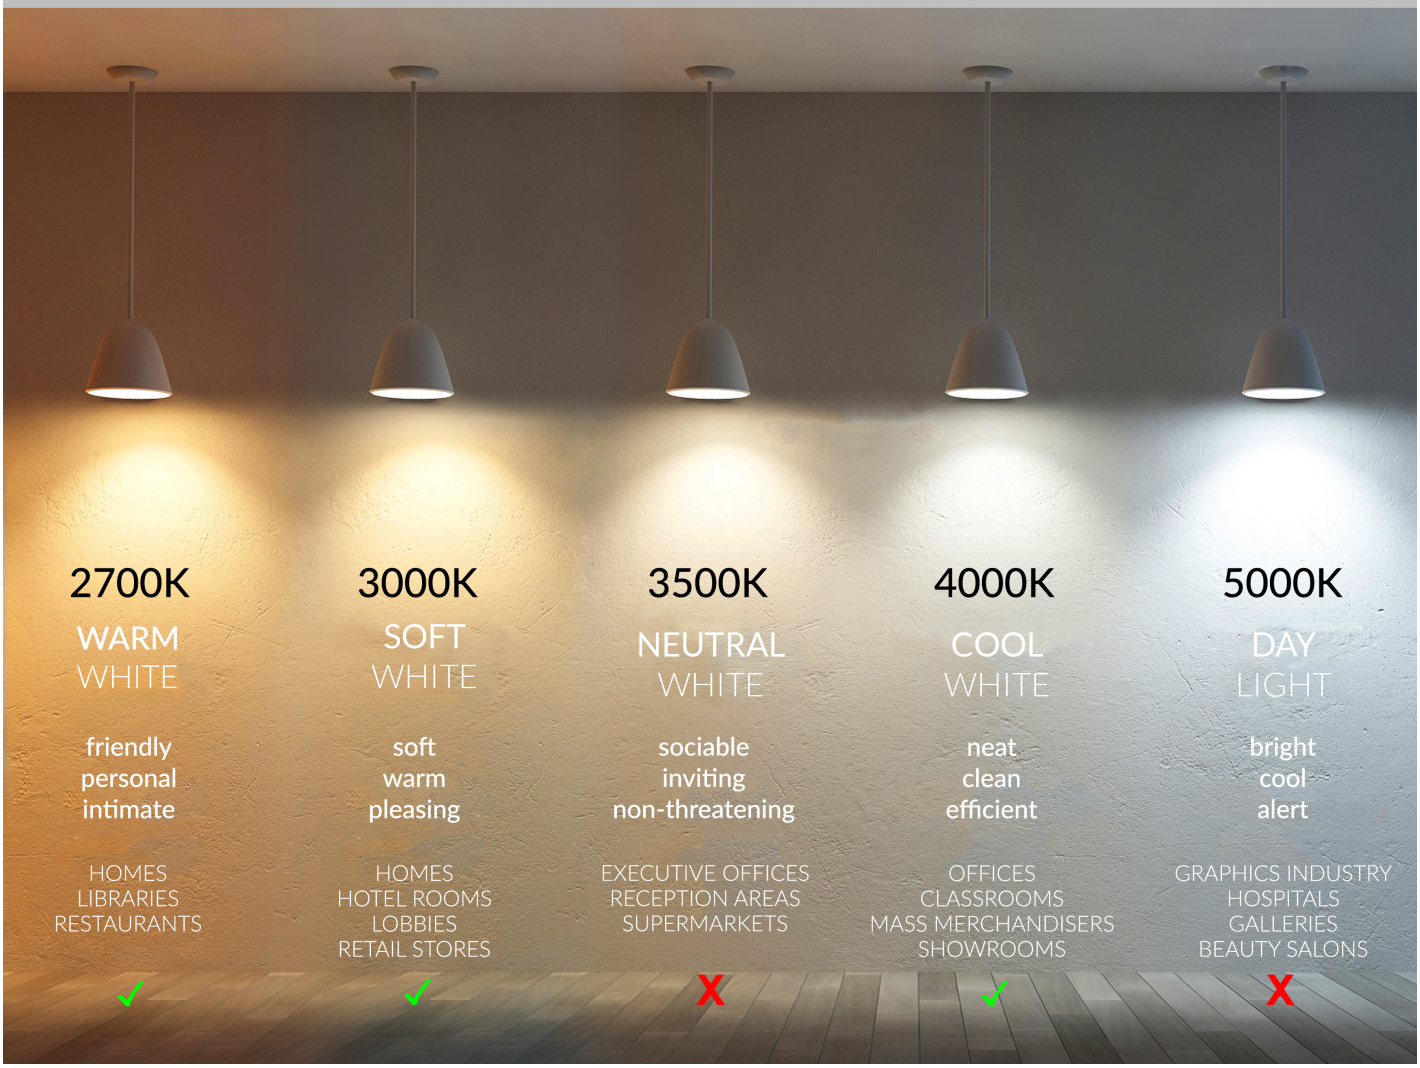
COLOR TEMPERATURE GUIDE