




THIS PRODUCT IS ONLY TO BE INSTALLED BY A QUALIFIED TECHNICIAN IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.

SHOP NOW >

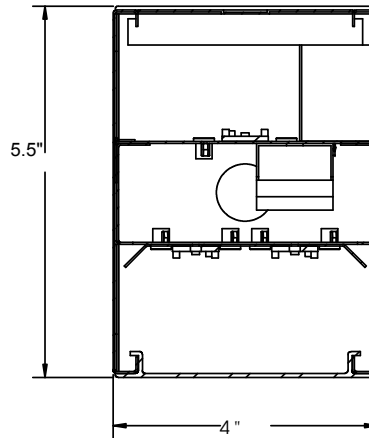

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Continuum 45 Architectural Linear LED Suspension Lighting** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

PRODUCT FAMILY

12108-W | Wall Mount

AVAILABLE LENGTHS

4FT | W 4" x L 48" x H 4"

8FT | W 4" x L 96" x H 4"

FEATURES

Construction: Die-Formed and Welded 22-Gauge Cold Rolled Steel

Mounting: Adjustable Aircraft Cable, 3 Wire Power Feed/Cable

Canopy: White Canopy + White Cable/Stem Kit Standard

Black Canopy + Black Cable/Stem Kit Available

Lens: Snap In Frosted Acrylic

Voltage: 120-277V

Dimming: 5-Wire 0-10V (100%-10%)

CRI: 83+ / 90

Life: 50,000 Hours

Warranty: 5 Years

Listings: Title 24 Compliant

ETL Listed for LED Component Only

LED Lamp Included

SPEC
GRADE



5
YEAR
WARRANTY

5
YEAR
WARRANTY

TITLE
24

ETL

ORDERING INFORMATION Example: (12108-P-D/I-3600L-30K-WH-AC48-EM)

Model	Distribution	Size	Wattage & Lumens	Color Temp	Finish	Mounting	Options
12108-P Pendant	D/I Direct/ Indirect	4 48"	3600L 24 watts (D) / 12 watts (I) 3600 lms 5400L 36 watts (D) / 18 watts (I) 5400 lms 7200L 48 watts (D) / 24 watts (I) 7200 lms	27K¹ 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SL Silver RD Red IR Iron BZ Bronze #XXXX³ Custom	AC48² 48" Adjustable Aircraft Cable (x2) AC144² 144" Adjustable Aircraft Cable (x2) ST24² 24" Stem (x2) STXX² Custom Stem Length	EM Remote Emergency Backup Battery AB⁴ Independent Control of Up & Down DS Daylight Sensor CRWK Continuous Row Wiring Kit
		8 96"	7200L 48 watts (D) / 24 watts (I) 7200 lms 10800L 72 watts (D) / 36 watts (I) 10800 lms				
		XX Custom Run	XXXXL⁵ Lumens Output				

¹90 CRI



²0.4" Thick 5-Conductor Power Cable (x1)

5" Round Canopy (x2)

³Please Specify RAL Number

⁴Available for Direct &
Indirect Models Only

⁵Driver: Programmable Driver with
Desired Lumen Output

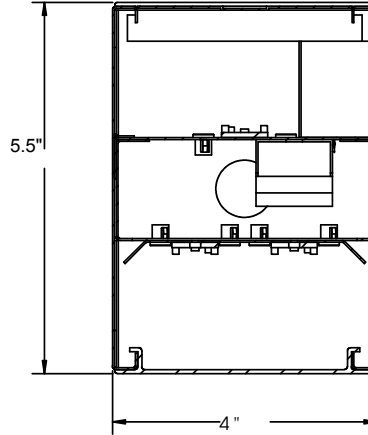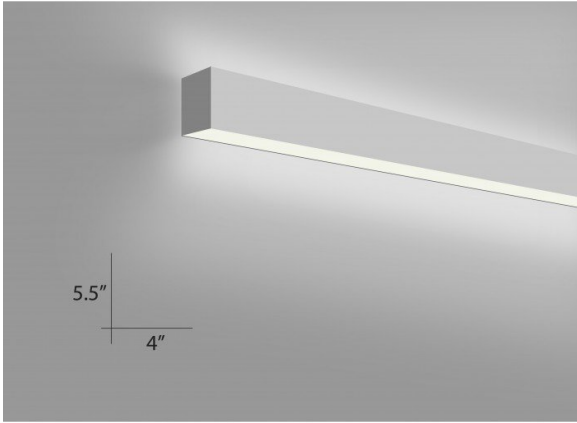

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Continuum 45 Architectural Linear LED Wall Lighting** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

PRODUCT FAMILY

12108-P | Pendant Mount

AVAILABLE LENGTHS

4FT | W 4" x L 48" x H 4"

8FT | W 4" x L 96" x H 4"

FEATURES

Construction: Die-Formed and Welded 22-Gauge Cold Rolled Steel

Lens: Snap In Frosted Acrylic

Voltage: 120-277V

Dimming: 5-Wire 0-10V (100%-10%)

CRI: 83+ / 90

Life: 50,000 Hours

Warranty: 5 Years

Listings: Title 24 Compliant

ETL Listed for LED Component Only

LED Lamp Included



ORDERING INFORMATION Example: (12108-W-D/I-4-3600L-30K-WH-EM)

Model	Size	Distribution	Wattage & Lumens	Color Temp	Finish	Options
12108-W Wall	4 48"	D/I Direct/ Indirect	3600L 24 watts (D) / 12 watts (I) 3600 lms 5400L 36 watts (D) / 18 watts (I) 5400 lms 7200L 48 watts (D) / 24 watts (I) 7200 lms	27K¹ 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SL Silver RD Red IR Iron BZ Bronze #XXXX³ Custom	EM Remote Emergency Backup Battery AB⁴ Independent Control of Up & Down DS Daylight Sensor CRWK Continuous Row Wiring Kit
	8 96"		7200L 48 watts (D) / 24 watts (I) 7200 lms 10800L 72 watts (D) / 36 watts (I) 10800 lms			
	XX Custom Run		XXXXL⁵ Lumens Output			

¹90 CRI

²Please Specify RAL Number

³Available for Direct &
Indirect Models Only

⁴Driver: Programmable Driver with
Desired Lumen Output

