

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Add value with architectural-grade surface mounting LED linear striplight to afford clarity in residential, industrial or commercial interiors. This grazer offers efficient, effective light for today's office, hotel, restaurant and retailer.

ADDITIONAL FEATURES

Construction: Anodized Aluminum

Finish: Silver

Lumens: 440 per foot **Wattage:** 4W per foot **Beam Spread:** 120°

Voltage: 24V LED fixture, 120-277V Triac, ELV, MLV

and 0-10V remote driver

Lens: Glare-free snap-in frosted acrylic for even

distribution

LED component: IP65 wet location (outdoor)

CRI: 95+

Usage: Vertical and horizontal wall grazing

Max Single Run: 16 feet


Listings: cULus, Title 24 JA8 Compliant (LED

component only)

Warranty: 5 years carefree for parts and components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings.

Surge damage is not covered by warranty.














ORDERING INFORMATION Example: .12108-4-30K-TEM)

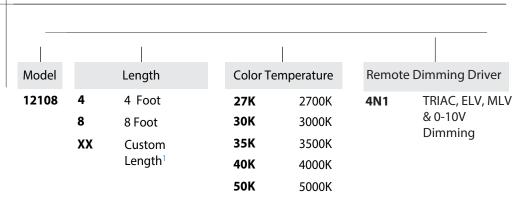

¹Specify Length in Feet




REMOTE DIMMING DRIVER SPECIFICATIONS

4N1SERIES Compatible with most TRIA


Compatible with most TRIAC, ELV, MLV & 0-10V Dimmers









4N1-300W-24V





4N1-200W-24V



COLOR TEMPERATURE GUIDE 2700K 3000K WARM SOFT WHITE GLOW GLOW Friendly Personal Intimate Pleasing Inon-threatening Intimate HOMES HOMES LIBRARES LOBBIES RETAIL STORES RECEPTION AREAS SUPERMARKETS SHOWROOMS REAL STORES GRAPHICS SINDUSTRY HOSPITALS GALLERIES BEAUTY SALONS BEAUTY SAL