

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

This specification-grade 24V LED wall wash strip light provides clarity in linear lighting to residential, industrial and commercial interiors. Our surface-mount, wall wash grazer is a highly efficient fixture ideal for today's office, hotel or restaurant and retail outlet.

ADDITIONAL FEATURES

Construction: Anodized Aluminum

Finish: Silver

Voltage: 24V LED fixture, 120-277V Triac, ELV, MLV and 0-10V remote driver

Lens: Glare-free snap-in frosted acrylic for even distribution

Beam Spread: 10° Narrow



CRI: 95+

Usage: Vertical and horizontal wall grazing

Max Single Run: 16 feet

Listings: cULus, Title 24 JA8 Compliant (LED component only), Optional IP65 Rating Available

Warranty: 5 years carefree for parts and components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

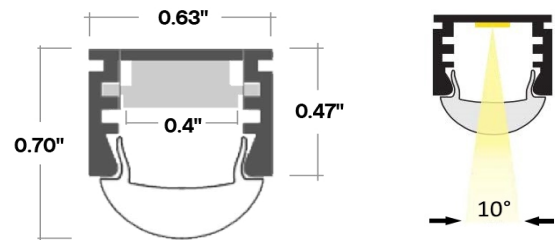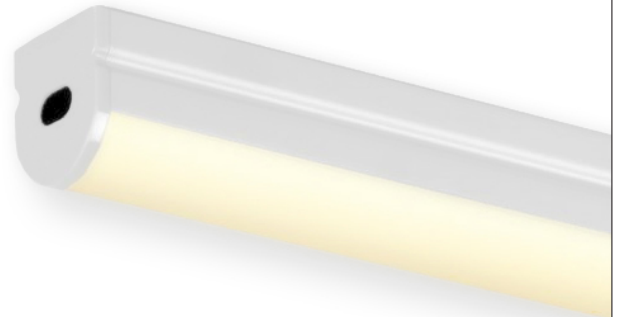

Alcon 12109 Linear Wall Wash Grazer Architectural LED Light



LED Component	Wattage	Lumen	IP Rating
Dry Location	4W per FT	440L per FT	IP45
Wet Location	3W per FT	250L per FT	IP65

ORDERING INFORMATION Example: 12109-4-27K-4N1-WT)

Model	Length		Color Temperature		External Dimming Driver	LED Component	
12109	2	2 Foot	27K	2700K	4N1 TRIAC, ELV, MLV & 0-10V Dimming	DY	Dry Location (IP45)
	3	3 Foot	30K	3000K			
	4	4 Foot	35K	3500K			
	6	6 Foot	40K	4000K			
	8	8 Foot	50K	5000K			
	XX	Custom Length ¹				WT	Wet Location (IP65)


¹ Specify Length in Feet

REMOTE DIMMING DRIVER SPECIFICATIONS


4N1SERIES

Compatible with most TRIAC, ELV, MLV & 0-10V Dimmers


4N1-30W-24V




4N1-60W-24V




4N1-96W-24V




4N1-150W-24V

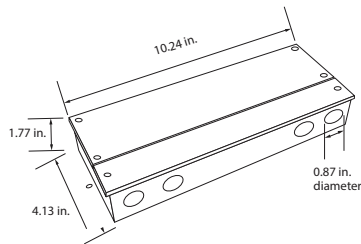

4N1-200W-24V

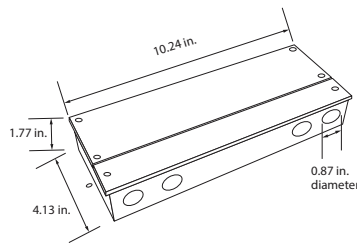

4N1-300W-24V

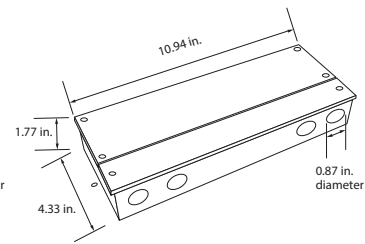

COLOR TEMPERATURE GUIDE

