

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade **Alcon Lighting NLP Series Architectural LED Suspended Pendant Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear chandelier designs offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The NLP integrated LED linear pendant lighting is available in lengths of 4' and 8', and can be joined together in seamless runs of any length.

AVAILABLE LENGTHS

4FT | W 7.6" x L 48" x H 1.9"
8FT | W 7.6" x L 96" x H 1.9"
Continuous Run | Consult Factory

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Full Ability to Tandem Mount for Continuous Run Application Equipped with Male & Female Quick Connect Harnesses
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Dimming:** 5-Wire 0-10V (100%-10%), 3-Wire Electronic Low Voltage (100%-1%)
- CRI:** 80+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

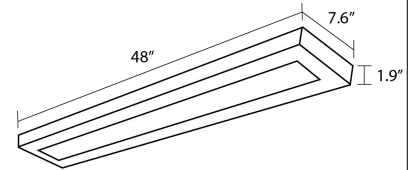

ORDERING INFORMATION Example: (12113-D-R24-S-4-AC48-WH-30K-010-EM)

Model	Distribution	Lumen Output	Shape	Mounting	Finish	Color Temp
12113	D Direct I Indirect	(Per 4 Foot Sections) R24 24 watts 2400 lms R48 48 watts 4800 lms	S Single Unit CR Continuous Run	AC48 Standard 48" Adjustable Cable AC72 72" Adjustable Aircraft Cable (x2) AC144 144" Adjustable Aircraft Cable (x2) ST24 24" Stem (x2) STXX Custom Stem Length	Standard WH White BK Black SL Silver Premium RD Red BL Blue GR Green OR Orange SB Satin Brass	Residential 30K 3000K Commercial 35K 3500K 40K 4000K Industrial 50K 5000K
		Total Run (in Feet)				
	D/I Direct/Indirect	R12D24 UP: 12 watts 1200 lms DOWN: 24 watts 2400 lms R18D36 UP: 18 watts 1800 lms DOWN: 36 watts 3600 lms R36D18 UP: 36 watts 3600 lms DOWN: 18 watts 1800 lms				
				Dimming Driver	Options	
				010 Standard 0-10V (100 - 1%) ELV Electronic Low Voltage (100%-1%)	EM Remote Emergency Backup Battery (4ft canopy) AB² Independent Control of Up & Down	