

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

The specification grade Alcon Lighting 12132 Hexagon Suspended Pendant Direct Light Fixture brings clean-lines and clear light to LED lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

**FEATURES**

- Construction:** Cold-rolled steel
- Lens:** Snap-In Frosted Acrylic Lens
- Voltage:** 120-277V 50/60 Hz
- Dimming:** 0-10V Dimmable 1%-100%.
- Operating Temperature:** -4°F (-20°C) ~ 122°F (50°C)
- Nominal Lamp Life:** 100,000 Hours
- Life:** 60,000 Hours (L70)
- Listings:** UL/CUL Listed for Dry and Damp Locations,
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)



**ORDERING INFORMATION** Example: (12132-P-D54-30K-8-WH-FL-AC4-WH/WH-T)

Model	Mounting	LED Downlight	LED Uplight	Color Temp	CRI	Finish	Lens
12132	P Pendant	<b>D54</b> 54 Watts   7680 lms	<b>(Blank)</b> Not Required	<b>27K</b> 2700K	<b>8</b> <small>Standard</small> 80+ CRI	<b>WH</b> White	<b>FL</b> <small>Standard</small> Flat
	S Surface	<b>D72</b> 72 Watts   9840 lms	<b>I4</b> 4.5 Watt   530 lms	<b>30K</b> 3000K	<b>9</b> 90+ CRI	<b>SL</b> Silver	<b>DL</b> 1/2" Drop Down
		<b>D108</b> 108 Watts   12732 lms	<b>I6</b> 6 Watts   733 lms	<b>35K</b> 3500K		<b>BK</b> Black	
		<b>D12</b> 12 Watts   1405 lms		<b>40K</b> 4000K		<b>XXXX</b> Specify XXXX:	
		<b>D13</b> 13.5 Watts   1537 lms		<b>50K</b> 5000K		<i>Found on Page 2</i>	



Optional Drop Down Lens

Pendant Mounting	Pendant Cord / Canopy Finish	Pendant Ceiling Type	Warranty	Options
<b>(Blank)</b> Not Required	<b>(Blank)</b> Not Required	<b>(Blank)</b> Not Required	<b>(Blank)</b> <small>Standard</small> 5 Year Warranty	<b>EM8</b> 8W Emergency Battery
<b>AC4</b> 4' Adjustable Aircraft Cable	<b>WH/WH</b> White Cord / White Canopy	<b>T9</b> 9/16" Grid T-bar Ceiling	<b>W7</b> 7 Year Warranty	<b>EM15</b> 15W Emergency Battery
<b>AC8</b> 8' Adjustable Aircraft Cable	<b>BK/BK</b> Black Cord / Black Canopy	<b>T15</b> 15/16" Grid T-bar Ceiling	<b>W10</b> 10 Year Warranty	<b>EM20</b> 20W Emergency Battery
<b>AC<sub>X</sub></b> Specify <sub>X</sub> in Feet (Max 30')	<b>WH/BK</b> White Cord / Black Canopy	<b>H</b> Hard / Dry Wall		<b>EM25</b> 25W Emergency Battery
<b>ST24</b> 2' Stem	<b>BK/WH</b> Black Cord / White Canopy	<b>SH</b> Sloped Hard / Dry Wall		<b>AUSA</b> Assembled in USA
<b>ST48</b> 4' Stem				
<b>ST<sub>X</sub></b> Specify <sub>X</sub> in Feet (Max 8')				

### Available Finishes

#### Standard

	Matte White	RAL #9003
--	-------------	-----------

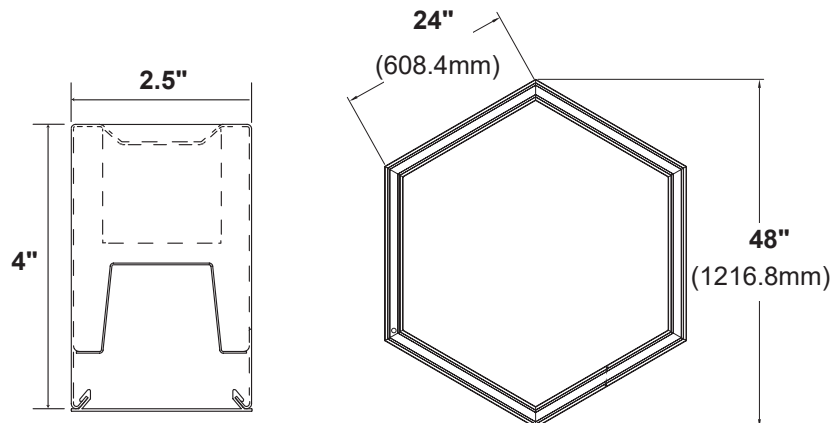
*Set up fee and longer lead time will be applied on non-standard finishes.*

#### Metropolitan

	Black	RAL #9011
	Silver	RAL #9022
	Asher Grey	RAL #7004
	Mason	RAL #7039
	Slate	RAL #7031
	Tech Grey	RAL #7016
	Chocolate Spice	RAL #8017
	Urban Native	RAL #8025
	Carmin	RAL #8028
	Reseda Green	RAL #6011



#### Vibrant

	Violet Dreams	RAL #4006
	Purple Red	RAL #3004
	Carmine Red	RAL #3002
	Rose	RAL #3017
	Pure Orange	RAL #2004
	Traffic Yellow	RAL #1023
	Daisy	RAL #1018
	Antique Spring	RAL #6019
	Island Skye	RAL #6027
	Sky Blue	RAL #5015



Compatible Dimmers

Dynamic White

	Triac	ELV	0-10V
	TG-600P	DVELV-303P	NTSTV
	LG-600P	SELV-300P	NFTV
	TGCL-153P	MAELV-600	DVSTV
	DV-600P	FAELV-500	
	DVCL-153P		
	S-603PG		
	CT-103P		
	S-600P		
	6161	IPE04	IP710-DLZ
	6633-P	VPE06-1LZ	
	6683		
	6631-2		
	IPI06-1LZ		

## COLOR TEMPERATURE GUIDE

