

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Available as a pendant, surface or wall mount, our ultra-thin LED fixture features a unique design that provides both energy efficiency and style. Offering field-adjustable color temperature switching, this fixture is suitable for applications such as office, banking, retail and classrooms.

DETAILS

Construction: Extruded aluminum housing.

Mounting: Pendant, wall and surface options available. Pendant mounting includes 4FT adjustable aircraft cable.

Finish: White

Color Temperature: Color temperature switch is capable of switching from 3000K/3500K/4000K

Voltage: 120V-277V, 50/60Hz



Dimming: 0-10V Dimmable

CRI: 90+

Life: 50,000 Hours

Warranty: 5 years Carefree for parts & components (Labor not included)

Listings: UL, Damp Location Rated.

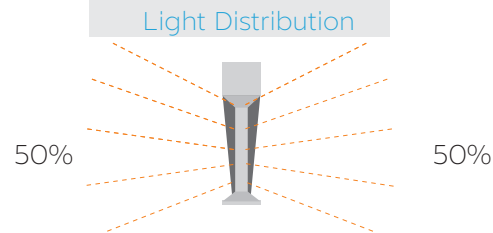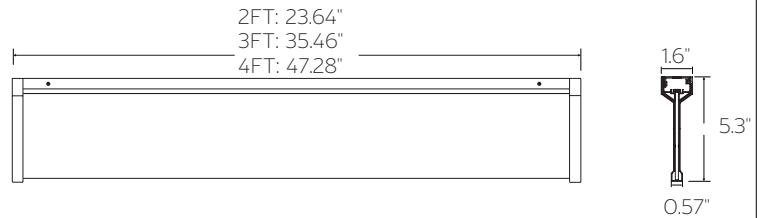

Size	Wattage	Lumen	Delivered Lumen
2FT	20W	2000 lm	2513 lm
3FT	20/30/40W	2000/3000/4000 lm	2509/3804/5097 lm
4FT			2369/3624/4880 lm

Ordering Information: Example: (12139-P-4-H)

Model	Mount	Length Wattage Lumen	Pendant Ceiling Type
12139	P	2	(Blank)
	Pendant	2FT 20W 2000lm	Not Required
	W	3	T9 ²
	Wall	3FT Switchable Wattage Switchable Lumen	9/16" Grid T-bar
	S	4	T15
	Surface Drywall	4FT Switchable Wattage Switchable Lumen	15/16" Grid T-bar
	ST ¹		SC ²
	Surface for T-Grid		Screw Slot
			H
			Hard / Dry Wall
			SH
			Sloped Hard / Dry Wall
			Wall

¹ Mounting hardware provided.
² J-box and T-grid clips are included.

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X