

FEATURES & SPECIFICATIONS

INTENDED USE

The **Alcon Lighting Capsule Architectural LED Pendant Mount Direct/Indirect Luminaire** features soft and diffused lighting that ensures maximum visual comfort and balanced shadows. The Capsule is ideal for indoor applications in residential, commercial, institutional, or architectural installations.

DETAILS

4 FT - W 9" x L 48" x Depth 3"

Construction: Extruded Aluminum
Die cast aluminum flat end caps

Finish: Matte White

Lens: Semi Specular Louver

4' fixture sections for nominal suspension spacing of 4'
4' sections can be joined to form longer length fixtures
(Hardware for Continuous Row Mount Included)

ADDITIONAL FEATURES

Voltage: 120-277 (50/60 Hz)

Lumens:

	Down Only	90%/10%	50%/50%
36W	3960	2633/264	2539/2289
54W	5940	4111/413	3582/3230
81W	8910	6329/635	5144/4640




Dimming: 0-10V 1~100%

CRI: 85+

Power Factor: +0.9

Operating Temperature: -20°C (-4°F) - 50°C (122°F)

Life: L70 - 50,000 Hours

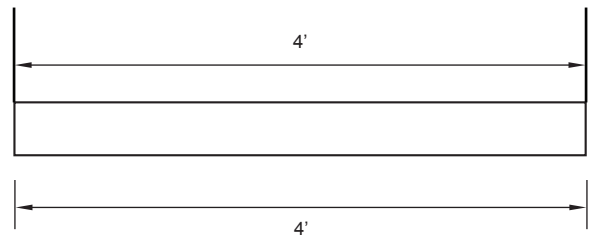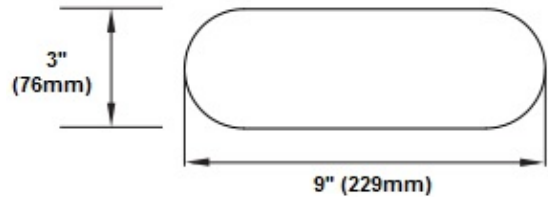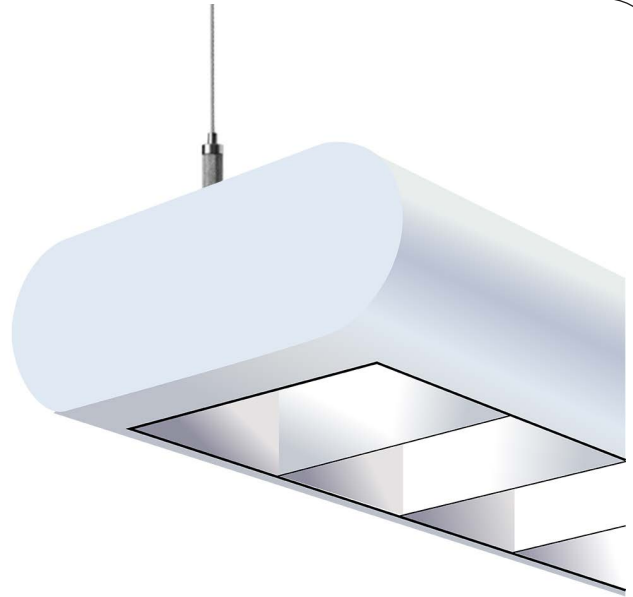

Alcon Lighting 12146-L Capsule II Architectural LED 4 Foot Linear Suspension Lighting Pendant Mount Direct/Indirect Light Fixture with Louver

Ordering Information:

Example: (12146-L-36W-100-30K-AC48-T-EM5)

Model	Wattage	Distribution	Color Temp	Mounting	Ceiling	Options
12146-L	36W 36 watts 54W 54 watts 81W 81 watts	100 100% Direct Only 9010 90% Direct/ 10% Indirect 5050 50% Direct/ 50% Indirect	30K 3000K 35K 3500K 40K 4000K 50K 5000K	AC48 48" Adjustable Aircraft Cable AC96 96" Adjustable Aircraft Cable ST24 24" Stem Mount Kit ST48 48" Stem Mount Kit	T T-Bar H Hard	WL White Louver EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast BSC Straight Connector