


## INSTALLATION INSTRUCTIONS

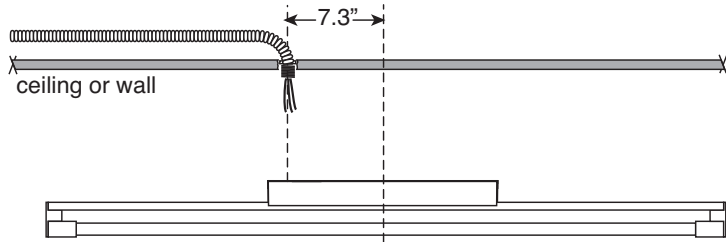

**Note: Power Does Not Enter At Center**

**WARNING:** disconnect main power at the source prior to installation!

- ❶ Attach 1/2" conduit to back plate with threaded connector (by others).
- ❷ Remove both sides of the driver cover and driver from back plate. Attach fixture to drywall using enclosed screws and re-attach driver.
- ❸ Connect power to driver and ground cage clamp connectors provided. Use up to 14AWG wire, maximum.

