

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Using cold-rolled steel joiner brackets to make connections, our LED Hexagons are made to be linked together to create any layout, form or shape. These pendant mount linkable hexagons make a great addition to any space such as showrooms, hotel lobbies and creative spaces.

FEATURES

Construction: 22 gauge powder coated cold-rolled steel

Lens: Frosted Snap-In Lens

Voltage: 120-277V

Dimming: 0-10V Dimming (dim to 1%)



CRI: 80+

Life: >100K life hours (L70 @ 25°C)

Listing: Made in the USA, BBA, UL and cUL Listed, Damp location rated.

Power Factor: >0.90


Warranty: 5 years carefree for parts & components.
(Labor not included)

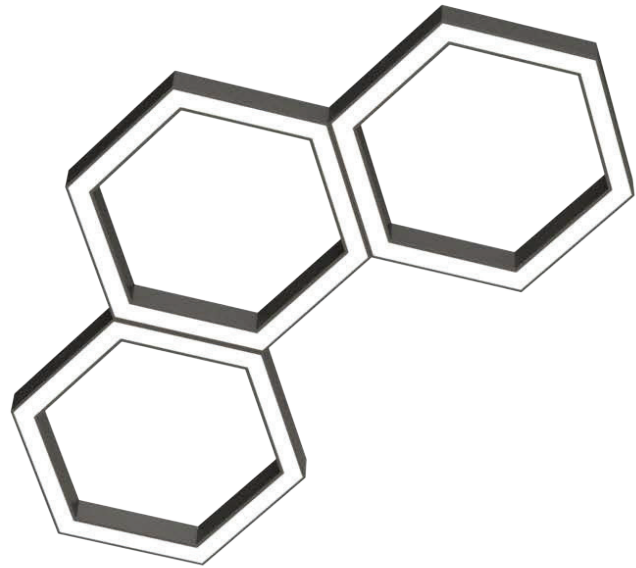


ORDERING INFORMATION Example: (12175-S-30K-WH)

Model	Size		Configuration	Wattage Lumens		Color Temp		Pendant Type		Finish		Options	
12175	22-IND	22"W x 26"L	IND Individual Fixture	30W	30 Watts, 3000 Lumens	30K 3000K 35K 3500K 40K 4000K 50K 5000K	AC ST	Aircraft Cable Stem	WH BK SL	Matte White Matte Black Silver	EM14	14 Watt Emergency Back-up	
	41-IND	41"W x 47"L		40W	40 Watts, 4000 Lumens								
				50W	50 Watts, 5000 Lumens								
				90W	90 Watts, 9000 Lumens								
				120W	120 Watts, 12000 Lumens								
				150W	150 Watts, 15000 Lumens								
	46-IND	46"W x 57"L	TRI 3 Light	120W	120 Watts, 12,000 Lumens								
	82-IND	82"W x 102"L		144W	144 Watts, 14,400 Lumens								
				170W	170 Watts, 17,000 Lumens								
				360W	360 Watts, 36,000 Lumens								
		432W		432 Watts, 43,200 Lumens									
			510W	510 Watts, 51,000 Lumens									


HEX DESIGN INSPIRATIONS




RIVER

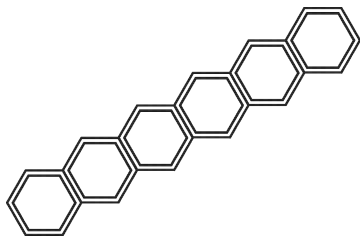


LINEAR

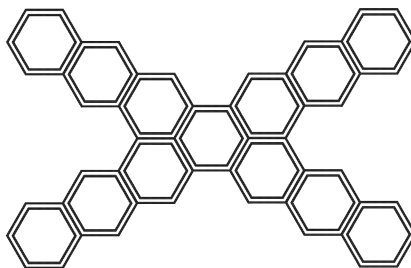


X




PUPPY

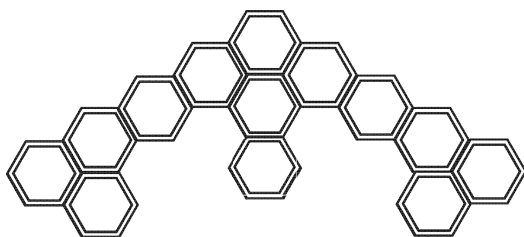


SPACESHIP

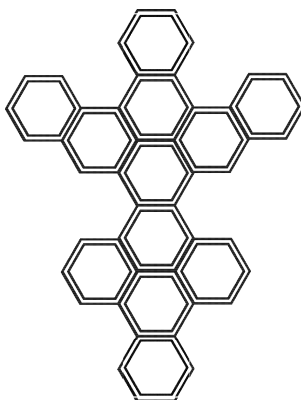


LOBSTER

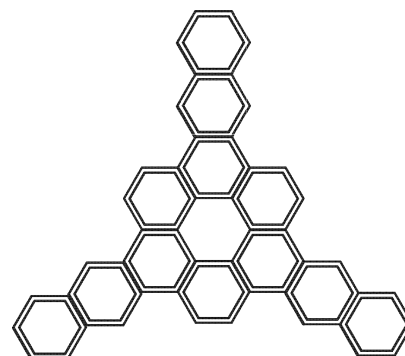


EIFFEL TOWER




BUTTERFLY




TURTLE




PYRAMID




TRIANGLE




FLOWER



STAR



DUMBBELL

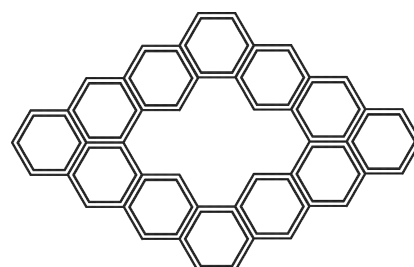

DIAMOND

COLOR TEMPERATURE GUIDE

