

Project Name:

Type:

Quantity:

SHOP NOW

FIXTURE SPECIFICATIONS

INTENDED USE

The RFT Series Architectural Linear LED Suspension Lighting fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more. The RFT series is constructed with a die-formed and welded 22-gauge cold rolled steel.

AVAILABLE LENGTHS

2FT	W	2.375"	Χ	L	24"	Χ	Н	3.35"
4FT	W	2.375"	Х	L	48"	Х	Н	3.35"
8FT	W	2.375"	Х	L	96"	Х	Н	3.35"

View our 12100-20-P product for custom lengths

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Snap-in frosted acrylic

Mounting: 48" aircraft cable, 3-wire power feed/cable, white canopy

included

Dimming Driver: 0-10V (100-10%) 120-277V 5-wire or incandescent

120V 2-wire Voltage: 120-277V

Wattage: 18W

CRI: 83

Life: 50,000 Hours

EM: Supplied with 12" lead wire. Consult factory for longer application

Listings: cETLus Listed, Title 24 Listed, DLC Listed on LED component

only

Warranty: 1 Year Carefree for Parts & Components

(Labor Not Included)

ORDERING INFORMATION Example: (12200-2-P-4-35K-WH-EM)

Model Length | Wattage | Lumens 12200-2-P 2 2 Foot | 15 Watts | 1700 Lumens RFT Pendant

4 4 Foot | 18 Watts | 2100 Lumens 8 8 Foot | 36 Watts | 4200 Lumens

Color Temp 35K 3500K 40K 4000K 50K 5000K

Finish WH St White

BK Black

SL Silver **Dimming Driver**

(Blank) Standard Non-Dimming

D10

120-277V 5-Wire 0-10V (100% -10%)

INC¹

120V 2-Wire Incandescent (100%-1%)










1 Not available on the 2' fixture




PRODUCT DIMENSIONS


4 ft




BOTTOM VIEW 2.375" x **L** 24" x **H** 3.35"

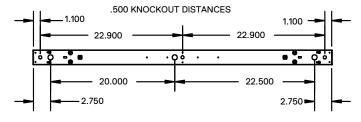

.875 KNOCKOUT DISTANCES



8 ft



BOTTOM VIEW

