

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade Alcon Lighting RFT Commercial LED Linear Pendant Direct Down Light Fixture delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear chandelier designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

2FT | W 4" x L 24" x H 4"

4FT | W 4" x L 48" x H 4"

8FT | W 4" x L 96" x H 4"

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Snap In Frosted Acrylic

Finish: White

Mounting: 48" Adjustable Aircraft Cable, 3 Wire Power feed/cable


Dimming Driver: 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire

CRI: 83

Life: 50,000 Hours

Warranty: 1 year carefree for parts & components (labor not included)

Listings: cETLus Listed, Title 24 Listed

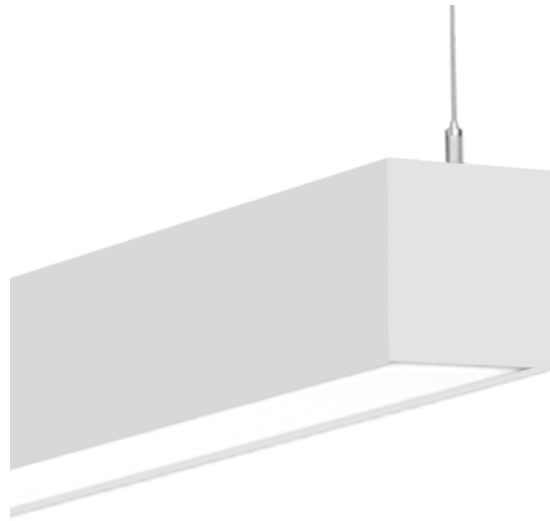

LED T8 TUBE

ORDERING INFORMATION Example: (12200-4-P-4-35K-D10-WH-EM)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Options
12200-4-P Pendant	2 2 Foot 30 Watts 3400 Lumens	35K 3500K	(Blank) <i>Standard</i> Non-Dimming D10 120-277V 5-Wire 0-10V (100% -10%) INC 120V 2-Wire Incandescent (100%-1%)	EM Emergency Backup Battery DS Integrated Daylight Sensor
	4 4 Foot 36 Watts 4200 Lumens	40K 4000K		
	8 8 Foot 72 Watts 8400 Lumens	50K 5000K		

¹ Not available on the 2' fixture