

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade **Alcon Lighting RFT Commercial LED Linear Recessed Direct Down Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

- 2FT** | W 4" x L 24" x H 4"
- 4FT** | W 4" x L 48" x H 4"
- 8FT** | W 4" x L 96" x H 4"
- Custom Length** | Consult Factory

FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Lens:** Snap In Frosted Acrylic
- Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire
- CRI:** 83
- Life:** 50,000 Hours
- Listings:** cETLus Listed, Title 24 Listed

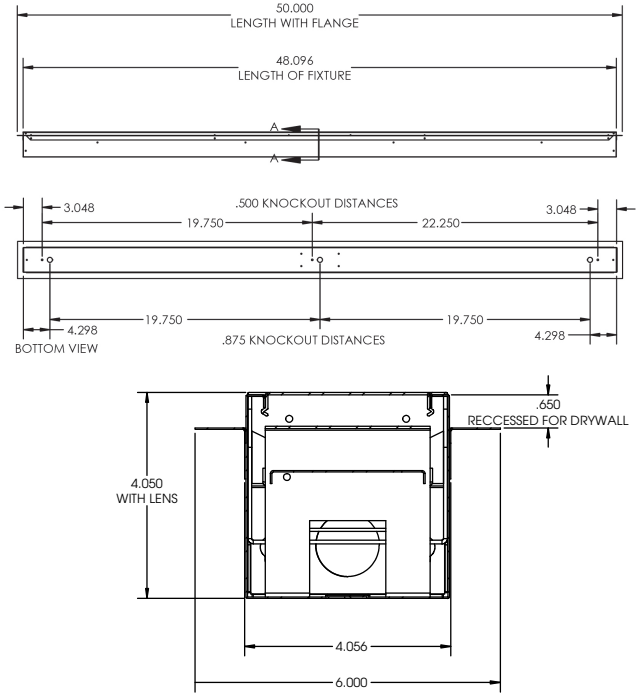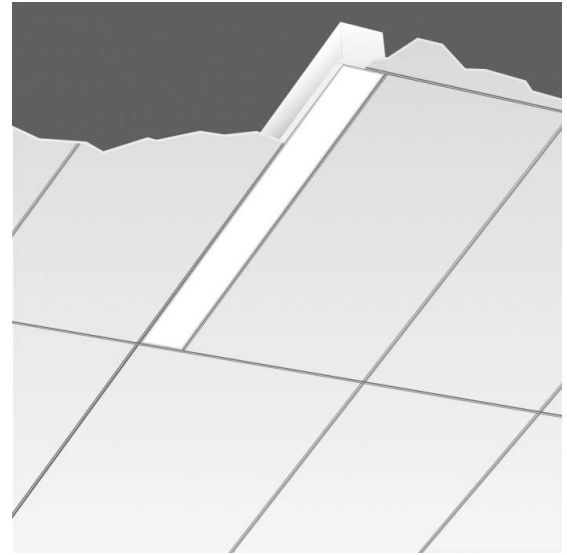

ORDERING INFORMATION Example: (12200-4-R-4-35K-D10-WH-EM)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Flange Finish	Options
12200-4-R-4 ¹ Trimless T-Bar Grid Ceiling	2 2 Foot 30 Watts 3400 Lumens	Commercial	(Blank) <i>Standard</i> Non-Dimming	WH White BK Black SL Silver	CRWK Continuous Row Wire Kit EM Emergency Backup Battery DS Integrated Daylight Sensor
	4 4 Foot 36 Watts 4200 Lumens	35K 3500K			
	8 8 Foot 72 Watts 8400 Lumens	40K 4000K			
12200-4-RR-4 ¹ Trimless Drywall Hard Ceiling		Industrial	D10 120-277V 5-Wire 0-10V (100% -10%)		
12200-4-RF-4 Flanged Drywall Hard Ceiling		50K 5000K	INC 120V 2-Wire Incandescent (100%-1%)		

¹Trimless mounting options do not require finish
²Factory Installed