

Project Name:

Type:

Quantity:



## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade **Alcon Lighting RFT Series Architectural LED Linear Recessed Direct Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

### AVAILABLE LENGTHS

**2FT** | W 6" x L 24" x H 6"

**4FT** | W 6" x L 48" x H 6"

**8FT** | W 6" x L 96" x H 6"

### FEATURES

**Construction:** Die-formed and welded 22-gauge cold rolled steel

**Lens:** Snap In Frosted Acrylic


**Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire

**CRI:** 83

**Life:** 50,000 Hours

**Listings:** cETLus Listed, Title 24 Listed

**Warranty:** 1 Year Carefree for Parts & Components (Labor Not Included)

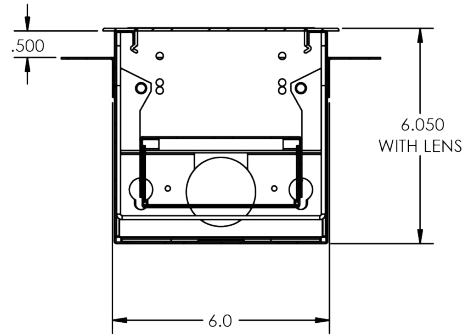

## ORDERING INFORMATION Example: (12200-6-R-8-35K-D10-WH-EM)

Model	Length   Wattage   Lumens	Color Temp	Dimming Driver	Flange Finish	Options
<b>12200-6-R<sup>1</sup></b> Trimless T-Bar Grid Ceiling	<b>2</b> 2 Foot   30 Watts   3400 Lumens	<b>Commercial</b> <b>35K</b> 3500K <b>40K</b> 4000K <b>Industrial</b> <b>50K</b> 5000K	<b>(Blank)</b> <i>Standard</i> Non-Dimming  <b>D10</b> 120-277V 5-Wire 0-10V (100% -10%)	<b>WH</b> White <b>BK</b> Black <b>SL</b> Silver	<b>EM</b> Emergency Backup Battery <b>DS</b> Integrated Daylight Sensor
	<b>4</b> 4 Foot   36 Watts   4200 Lumens				
	<b>8</b> 8 Foot   72 Watts   8400 Lumens				
<b>12200-6-RR<sup>1</sup></b> Trimless Drywall Hard Ceiling					
<b>12200-6-RF</b> Flanged Drywall Hard Ceiling			<b>INC</b> 120V 2-Wire Incandescent (100%-1%)		

<sup>1</sup>Trimless mounting options do not require finish