

Project Name:

Type:

Quantity:

## FIXTURE SPECIFICATIONS

### INTENDED USE

This larger, commercial-grade, 6-inch wide lens opening, sibling of the RFT series linear surface-mounted lights delivers continuous lines and clear, powerful, high-CRI LED light to commercial and residential interior lighting. Our modern 120-277V, slim profile and contemporary design provides up to 8,400 lumens per 8-foot run. The exceptional performance and versatility are ideal for offices, classrooms, conference rooms, museums, retail outlets and hospitality interiors. This linear ceiling light comes in standard lengths of 2-feet, 4-feet and 8-feet and can be connected for continuous runs of any length.

### AVAILABLE LENGTHS

**2FT** | W 6" x L 24" x H 6"

**4FT** | W 6" x L 48" x H 6"

**8FT** | W 6" x L 96" x H 6"

### FEATURES

**Construction:** Die-formed and welded 22-gauge cold rolled steel

**Lens:** Snap-in frosted acrylic



**Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire

**CRI:** 83

**Life:** 50,000 Hours

**Listings:** cETLus Listed, Title 24 Listed

**Warranty:** 1 Year Carefree for Parts & Components (Labor Not Included)

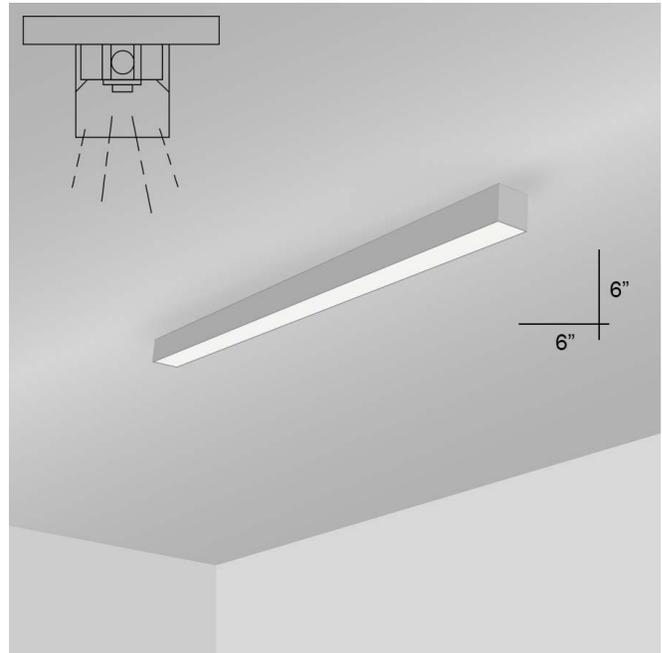

## ORDERING INFORMATION Example: (12200-6-S-35K-D10-WH-EM)

Model	Length   Wattage   Lumens	Color Temp	Dimming Driver	Finish	Options
<b>12200-6-S</b> RFT Surface	<b>2</b> 2 Foot   30 Watts   3400 Lumens	<b>35K</b> 3500K	<b>(Blank)</b> <i>Standard</i> Non-Dimming <b>D10</b> 120-277V 5-Wire 0-10V (100% -10%) <b>INC</b> 120V 2-Wire Incandescent (100%-1%)	<b>WH</b> White	<b>EM</b> Emergency Backup Battery <b>DS</b> Integrated Daylight Sensor
	<b>4</b> 4 Foot   36 Watts   4200 Lumens	<b>40K</b> 4000K		<b>BK</b> Black	
	<b>8</b> 8 Foot   72 Watts   8400 Lumens	<b>50K</b> 5000K		<b>SL</b> Silver	