

INTENDED USE

The Luna suspended glass globe LED light features an elegant design emitting high Color Rendering Index (CRI) LED light. Our product fits any residential or commercial interior. The modern architectural lighting renders a work or home space with a refined sense of purpose and a warm glow.

FEATURES

Construction: Hand blown glass shade with matte finish face faceplate.

Mounting: 6 foot adjustable aircraft cable with 18 AWG adjustable power cord standard.


CRI: 90+

Input Voltage: 120/277V, 50/60Hz

Listings: cUL, Made in USA

Warranty: 5 Years carefree for parts & components (Labor not included)

Color Temperature	19" Lumen Output	23" Lumen Output
30K / 35K / 40K	5170L	4800L
RGB + 35K	3500K: 2442L Red: 357L Green: 1906L Blue: 357L Full Color: 4169L	3500K: 1954L Red: 286L Green: 1525L Blue: 286L Full Color: 4169L

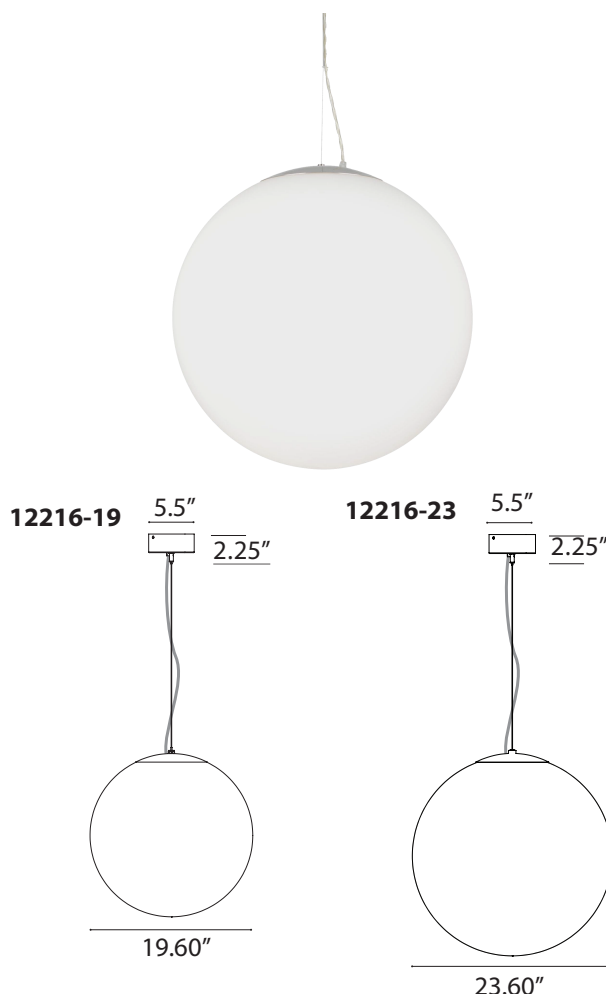


ORDERING INFORMATION Example: (12216-19-WH-WH-30K-AC6-010-ID)

Model	Diameter Wattage	Finish	Cord Color	Color Temperature	Pendant Mounting	Driver	Driver Mounting	Options
12216	19	WH	WH	30K	AC6 ^{Standard}	010 ^{Standard}	ID ^{Standard}	IEM
	19.60" 48W	White	White	3000K	6' Aircraft Cable	0-10V Dimming	Integrated Driver	Integrated Emergency Back Up Battery
	23	SL	GY	35K	AC12	LDE1	RD	REM
	23.60" 48W	Silver	Gray	3500K	12' Aircraft Cable	Lutron Ecosystem	Remote Driver	Remote Emergency Back Up Battery
		BK	BK	40K	AC25	Hi-Lume 1%		EQ
		Black	Black	4000K	25' Aircraft Cable	DALI		Earthquake Bracing Kit
				RGBW ¹		DALI Dimming		DMX-WC-W ¹
				RGB + 3500K		DMX ¹		DMX Wall Controller (White)
						DMX Dimming		DMX-WC-B ¹
								DMX Wall Controller (Black)

REMOTE DRIVER

For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation. Order **RD**.

Remote Driver Dimensions




Remote Driver Canopy

3.80 x 0.45 in.

Max. Wiring Distance (at full load)

Wire Size (AWG)	Distance (ft.)
18	18
16	29
14	46
12	71
10	120

Integrated Emergency Dimensions

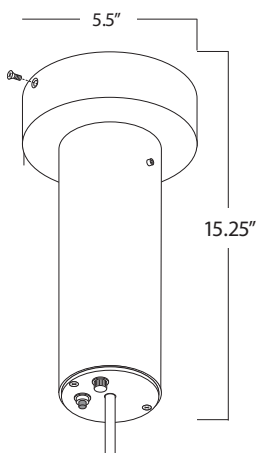


INTEGRATED EMERGENCY

Battery pack provides 10W for 90 minutes. Canopy shown at right. Order **IEM**.

REMOTE EMERGENCY

Battery pack provides 10W for 90 minutes. Includes red light/test switch in handybox. Order **REM**.

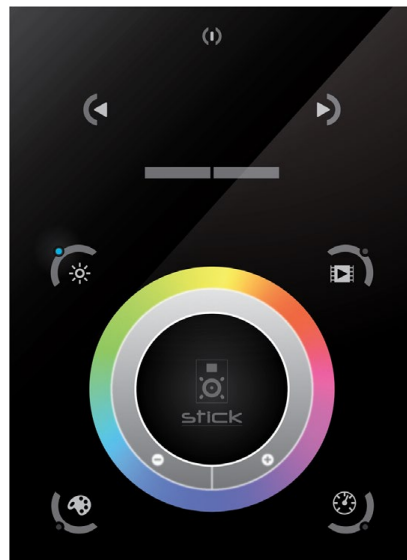

Technical Data for DMX Controller

Input Power	5-15v DC
Output Protocol	DMX512 (x2)
Programmability	PC, Mac, Tablet, Smartphone
Available Colors	Black / White
Connections	USB Type-C, Ether-net, RS232, Clock, 8 relay
Memory	microSD (32Gb Max)
TCP Connections	5
Temperature	-10 °C to 45 °C LIR2032
Battery	Single or double gang wall socket
Mounting	
Dimensions	5.74"x4.17"x0.43"
	146x106x11mm
Weight	247g
Standards	EC, EMC, ROHS, ETL

COLOR TEMPERATURE GUIDE

