

FIXTURE SPECIFICATIONS

INTENDED USE

Our large, purposeful, commercial-grade LED ring light yields strong, streamlined direct downlight. This perfectly circular design suits residential, hospitality and commercial interiors. For direct lighting in today's office, classroom or conference room, this pendant light with aluminum outer housing, glare-free reflector and adjustable aircraft cables, comes in a variety of lengths and finishes. Available with Bluetooth Mesh.

FEATURES

Standard Canopy: 10" x 2.25"

Remote Canopy: 3" x .45"

Pendant: 8' adjustable aircraft cables/power cord included (Custom length available, consult MFG)

Construction: Extruded aluminum outer housing
Adjustable power cord and AC cables with push button grippers are standard

Lens: White frosted acrylic diffuser

Reflector: Glare-free, one piece, heavy gauge aluminum



Mounting: All standard J-boxes

Voltage: 120/277VAC

CRI: 90

Dimming: 0-10V (100-1%)

Emergency: 90 minutes minimum, remote install only

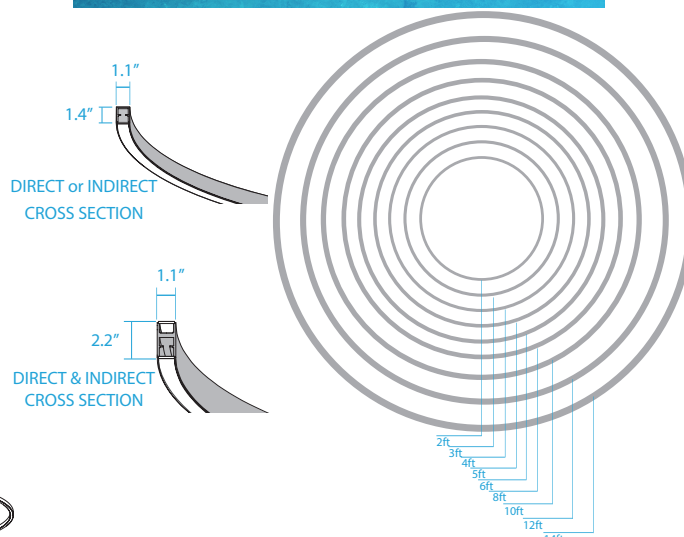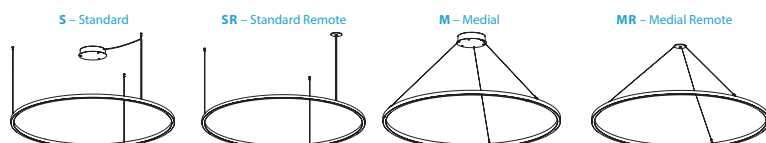

ORDERING INFORMATION Example: (12253-D-2-30K-SL-WH-S-EM)

Model	Light Distribution	Size Wattage ² Lumens ² Weight	Color Temp	Finish	Cable Finish	Mounting	Options
12253	D Direct	2	30K ^{Standard} 3000K	SL ^{Standard} Silver	WH White	S ³ Standard	EM7 7W Remote Emergency Back-Up Battery
	I Indirect	3	35K 3500K	BK Black	GR Gray	SR Standard Remote	XX Custom AC Cable/ Power Cord (25' Max)
	DI ¹ Direct/Indirect	4	40K 4000K	WH White		M Medial	
		5				MR Medial Remote	
		6					
		8					
		10					
		12 ⁴					
		14					



¹ Double wattage and lumen in the next column

² Wattage and lumens per direction

³ Not available for sizes from 8ft to 14ft

⁴ Indirect Light Distribution doesn't apply to the 12ft size