

**FIXTURE SPECIFICATIONS**
**INTENDED USE**

Featuring an elegant and original design, this large, architectural-grade LED half circle pendant affords powerful downlighting and uplighting. Designed with hospitality, residential and commercial interiors in mind, our light comes in extruded aluminum outer housing with a glare-free reflector. The distinctive light includes adjustable aircraft cables for hanging.

**FEATURES**

**Construction:** Extruded aluminum outer housing Adjustable power cord and AC cables with push button grippers are standard

**Dimensions:** Width 1.10" x Depth 2.20"

**Remote Canopy:** 3.80" D x 0.45" H

**Pendant:** 8' adjustable aircraft cables/power cord included (Custom length available, consult MFG)

**Lens:** White frosted acrylic diffuser

**Reflector:** Glare-free, one piece, heavy gauge aluminum

**Mounting:** All standard J-boxes


**Voltage:** 120/277VAC





**CRI:** 90+

**Dimming:** 0-10V (100-1%)

**Remote Emergency:** 90 Minutes

**Listings:** UL listed for dry locations only.

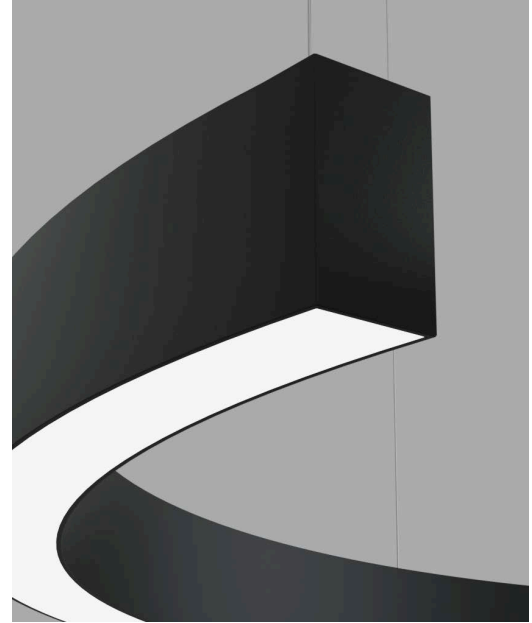
**Circle Shape Options**

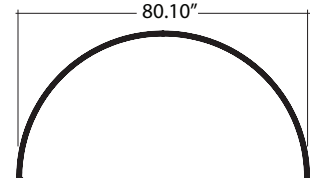**2-90 – 90° 2 Foot Half Circle**

**3-120 – 120° 3 Foot Half Circle**

**3-180 – 180° 3 Foot Half Circle**

**4-90 – 90° 4 Foot Half Circle**

**6-180 – 180° 6 Foot Half Circle**
**Linear Length Options**

**L2 – 2 ft. (23.65")**

**L3 – 3 ft. (35.00")**

**L4 – 4 ft. (46.40")**

**L5 – 5 ft. (57.75")**


**L6 – 6 ft. (69.15")**

**L8 – 8 ft. (91.90")**


**ORDERING INFORMATION** Example: (12258-C-2-90-2-L4-2-30K-SL-WH)

Model	Circle Shapes   Wattage   Lumens	Quantity	Linear Length   Wattage   Lumens	Quantity	Color Temperature	Finish	Cord Finish	Options
12258-C	<b>2-90</b> 90° 2 Foot   24 Watts   2045 Lumens		(Blank) Circle Shape Only		<b>30K</b> 3000K	<b>SL</b> Silver	<b>WH</b> White	<b>EM7</b> 7W Remote Emergency Back-Up Battery
	<b>4-90</b> 90° 4 Foot   49 Watts   4100 Lumens		<b>L2</b> 2 Foot   20 Watts   1732 Lumens		<b>35K</b> 3500K	<b>BK</b> Black	<b>GR</b> Gray	<b>EM12</b> 12W Remote Emergency Back-Up Battery
	<b>3-120</b> 120° 3 Foot   43 Watts   3630 Lumens		<b>L3</b> 3 Foot   30 Watts   2585 Lumens		<b>40K</b> 4000K	<b>WH</b> White	<b>XX</b> Custom AC Cable/Power Cord (25' Max)	
	<b>3-180</b> 180° 3 Foot   44 Watts   4100 Lumens		<b>L4</b> 4 Foot   40 Watts   3465 Lumens		<b>RGB</b> RGB			
	<b>6-180</b> 180° 6 Foot   98 Watts   8200 Lumens		<b>L5</b> 5 Foot   50 Watts   4317 Lumens					
			<b>L6</b> 6 Foot   60 Watts   5170 Lumens					
		<b>L8</b> 8 Foot   80 Watts   6930 Lumens						
		<b>Lxx</b> Custom Length						



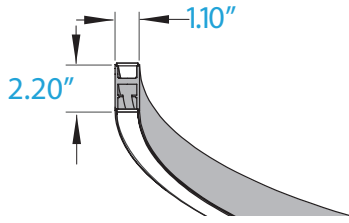


Cross Section

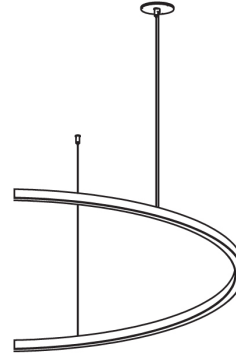

Remote Driver Mounting





End Caps  
Included



Remote Driver Canopy  
3.80" D x 0.45" H

An example of the designs made possible with the Contour

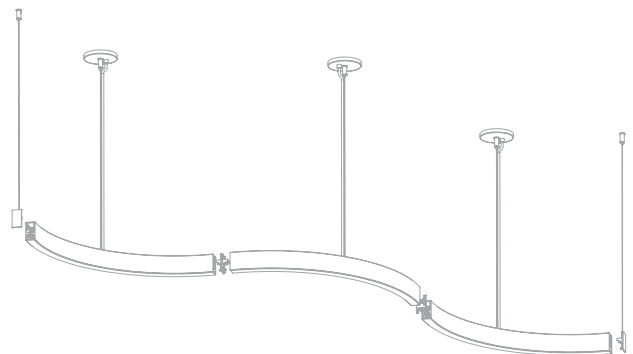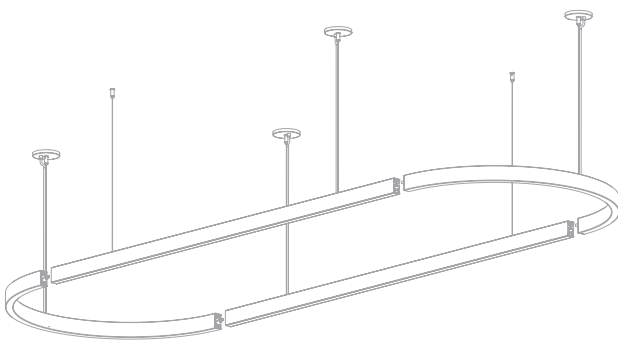

# COLOR TEMPERATURE GUIDE

				
<b>2700K</b>	<b>3000K</b>	<b>3500K</b>	<b>4000K</b>	<b>5000K</b>
<b>WARM WHITE</b>	<b>SOFT WHITE GLOW</b>	<b>NEUTRAL GLOW</b>	<b>COOL WHITE GLOW</b>	<b>DAYLIGHT GLOW</b>
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
<b>X</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>X</b>