

Project Name:

Type:

Quantity:

Fixture Specifications

INTENDED USE

Elevate this ringed chandelier in your interior. Framed in seamless metal, which—for optimal color control consistency—works best within series S, our 85-lumens-per-watt light casts excellent illumination from an elegant chandelier. The 80+ Color Rendering Index (CRI) architectural-grade LED light fixture can deliver 100,000 hours of light.

FEATURES

Construction: Seamless aluminum frame

Color Temperature Switch: Capable of delivering 3000K, 3500K & 4000K color temperatures. Color temperature tuning (from 3K to 4K), RGBW-3K & RGBW-4K available. For optimal color control consistency, this product works best within series S.

Beam Angle: 120°

Lens: High transmittance acrylic

Lumens: 85 lumens per watt

Voltage: 100-277V

Power factor: ≥0.97

CRI: 80+

Dimming: 0-10V dimmable

Life: 100,000-hour

Warranty: 5 year carefree for parts & components (labor not included)

Listings: cULus, FCC listed, RoHS compliant, Dry location.



Style



Round Driver



Round Driver with Ring




Remote Driver

ORDERING INFORMATION Example: (12272-1-16-CS-010-A-BK-AC60)


Model	Rings	Color Temp	Dimming Control	Style	Finish	Mounting	Options
12272							
1 Tier							
1-16	16" 20W 1700 lms	CS	Color Temperature Switch (3000K-3500K -4000K)	010 Standard 0-10V Dimming	A Standard Round Driver	AC60 5-ft Adjustable Aircraft Cable	CCT-C ³ Color Temperature Tuning Wall Control
1-24	24" 30W 2550 lms				B Round Driver w/Ring	AC120 10-ft Adjustable Aircraft Cable	RGB-C ³ RGB Wall Control
1-32	32" 40W 3400 lms				SL Silver	AC180 15-ft Adjustable Aircraft Cable	RGB/CCT-R ³ RGBW / Color Temperature Handheld Remote
1-40	40" 50W 4250 lms				BR Oil Rubbed Bronze	AC240 20-ft Adjustable Aircraft Cable	REMS 5-Watt Remote Emergency Backup Battery
1-48	48" 60W 5100 lms	RGBW4K ¹	RGBW + 4000K	ZB ² ZigBee Control	OR Orange		REM10 10-Watt Remote Emergency Backup Battery
1-60	60" 70W 5950 lms	RGBW3K ¹	RGBW + 3000K	D Remote Driver	YE Yellow		REM17 17-Watt Remote Emergency Backup Battery
1-72	72" 80W 6800 lms	CCT ¹	Color Temperature Tuning		RE Fire Engine Red		
2 Tier					PL Platinum		
2-16	16" + 24" 50W 4250 lms				RG Rose Gold		
2-32	32" + 40" 90W 7650 lms				SG Spanish Gold		
2-40	40" + 48" 110W 9350 lms						
2-60	60" + 72" 150W 12750 lms						
3 Tier							
3-16	16" + 24" + 32" 90W 7650 lms						
3-32	32" + 40" + 48" 150W 12750 lms						
3-40	40" + 48" + 60" 180W 12750 lms						
3-48	48" + 60" + 72" 200W 17000 lms						
4 Tier							
4-60	60" + 48" + 40" + 32" 200W 17000 lms						
4-72	72" + 60" + 48" + 40" 250W 21250 lms						
5 Tier							
5-32	32" + 40" + 48" + 40" + 32" 240W 17000 lms						
5-48	48" + 60" + 72" + 60" + 48" 300W 25500 lms						


¹ Must be paired with DMX or ZigBee Driver² Driver size increases, view pages 2 & 3 for details³ For control information, see page 4

Tier 1

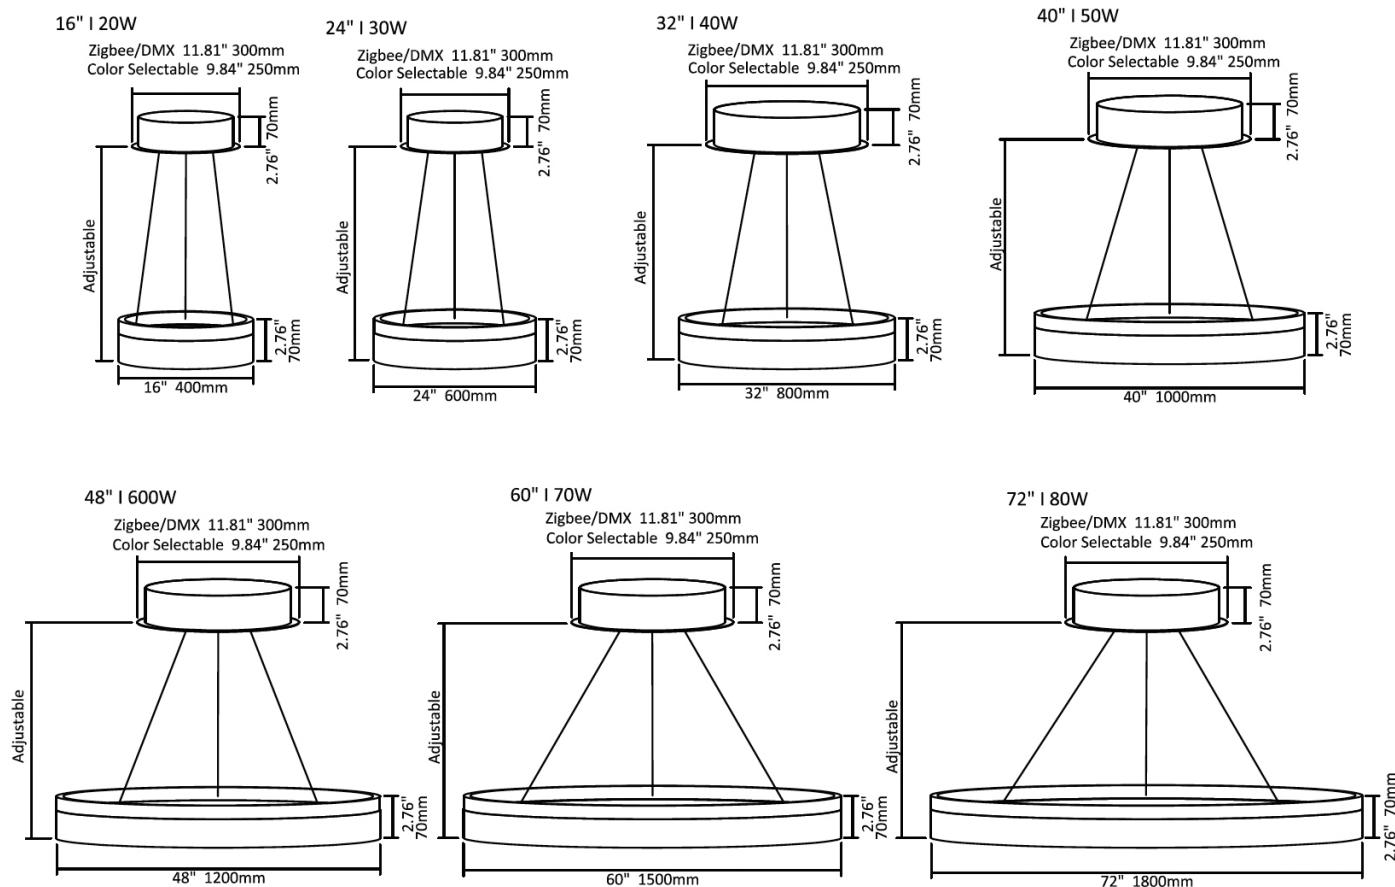

Tier 2

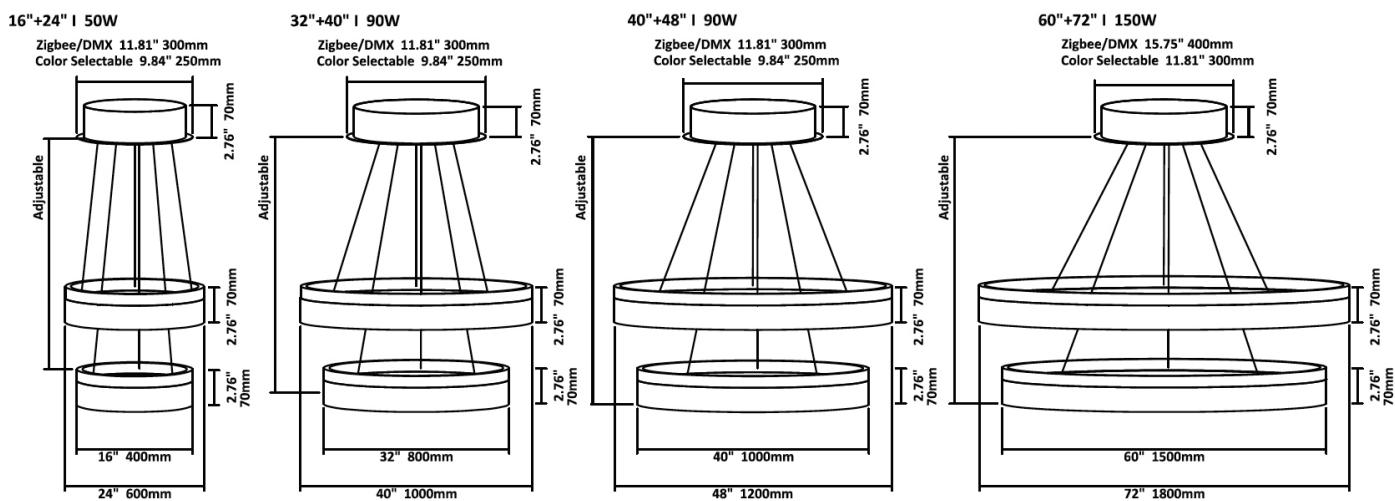

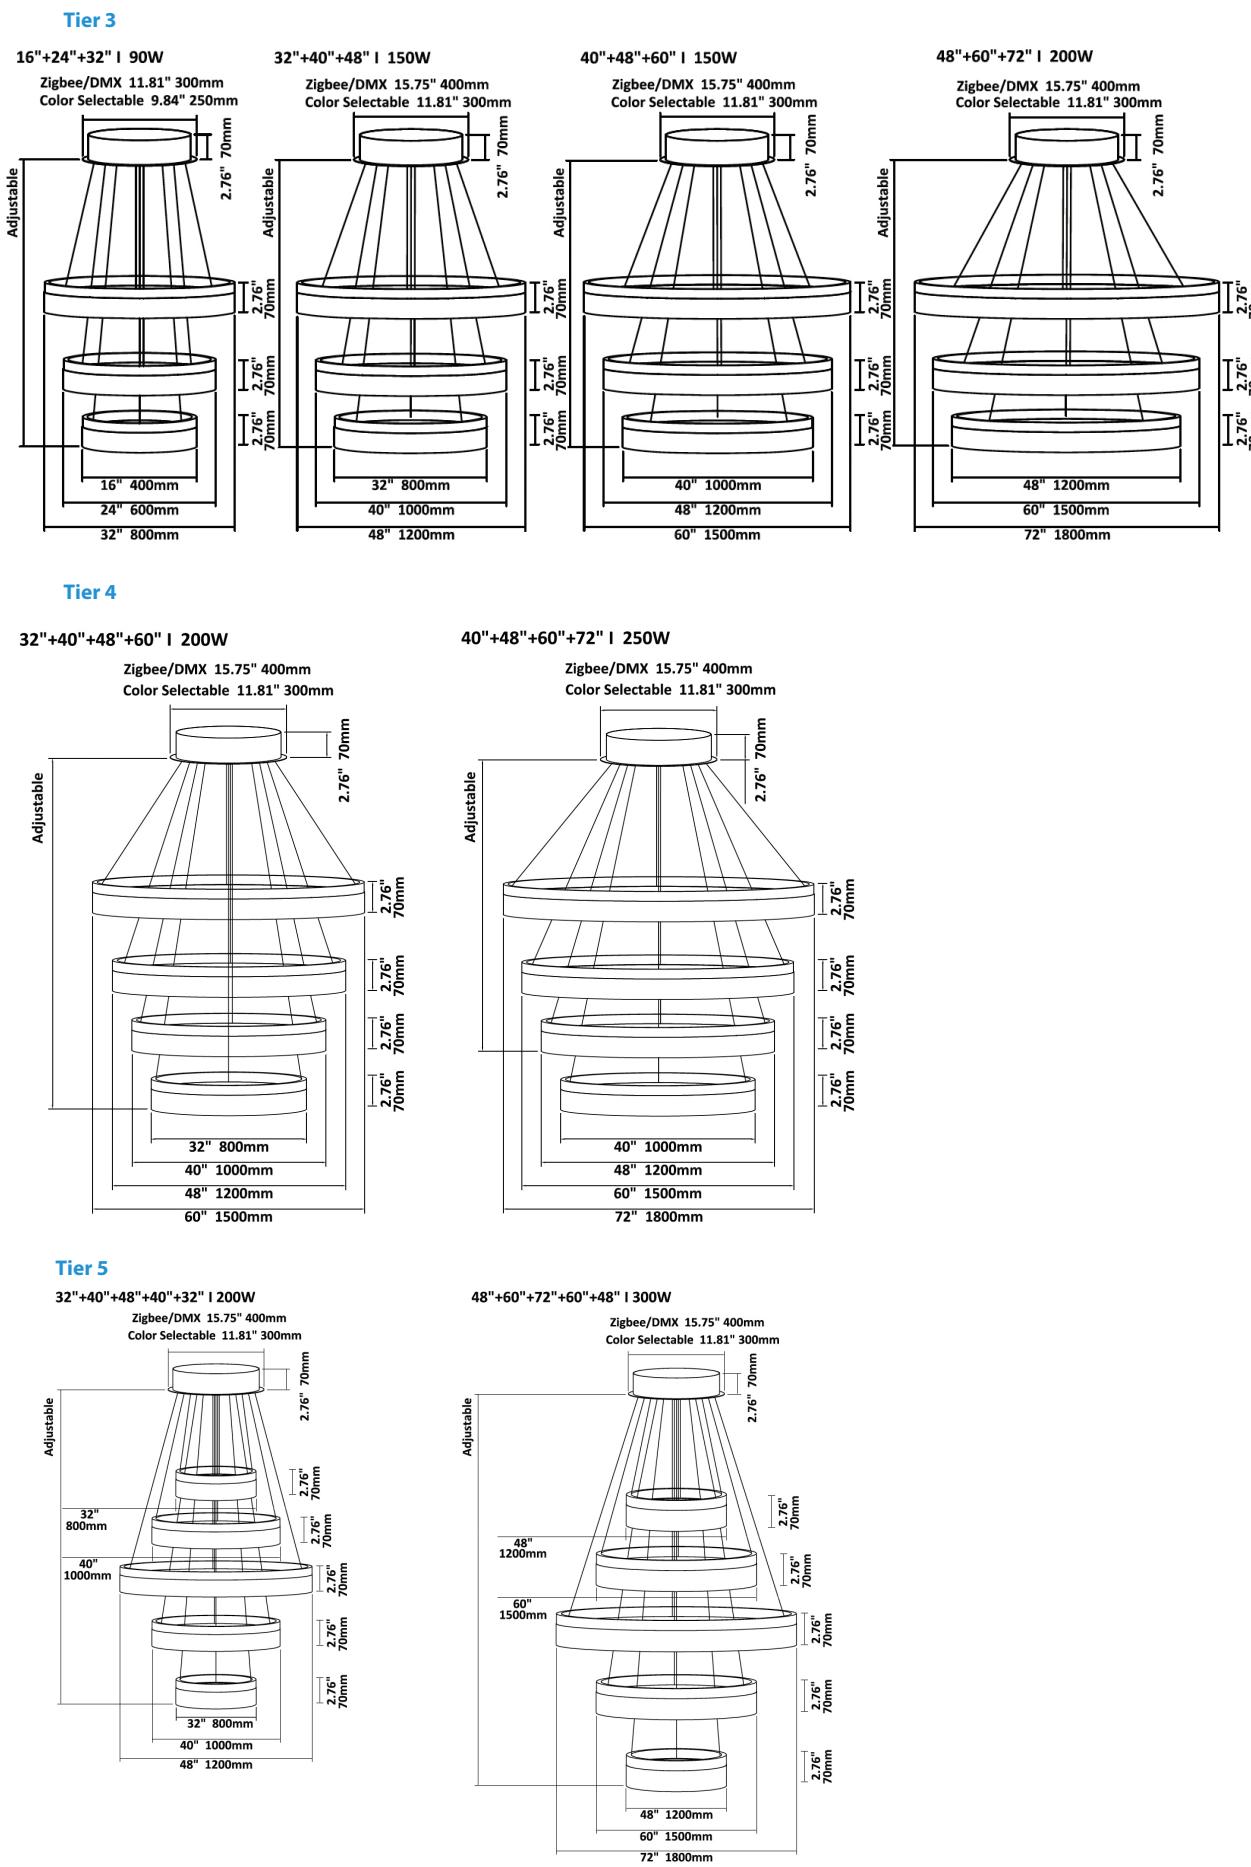

Control	DMX Compatible	ZigBee Compatible
 CCT Wall Control	✓	✓
 RGBW Wall Control	✓	✓
 RGBW/CCT Handheld Remote Control	✗	✓
 Alexa Echo Plus, Google Home & other smart Speakers <small>Device must be Zigbee 8.0 Compatible</small>	✗	✓
 iOS / Android Application <small>Alexa Echo Plus, Google Home or other ZigBee 8.0 Compatible smart speaker needed for operation</small>	✗	✓