

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Add a refined glow with our rectangular commercial-grade chandelier, ideal for any commercial, hospitality and residential interior. Use this general LED lighting pendant to illuminate today's home or office, conference room, trading space, such as a retail showroom, hotel, restaurant or other business.

FEATURES

Construction: Seamless Aluminum Frame

Color Temperature Switch: Capable of delivering 3000K, 3500K & 4000K Color Temperatures. Color Temperature Tuning (from 3K to 4K), RGBW-3K & RGBW-4K Available. For optimal color control consistency, this product works best within series S.

Beam Angle: 120°

Lens: High Transmittance Acrylic

Voltage: 100-277V

Power factor: 0.97


CRI: 80+

Dimming: 0-10V Dimmable

Life: 100,000-hour

Warranty: 5 Year Carefree for Parts & Components (Labor Not Included)

Listings: cULus, FCC listed, RoHS compliant, Dry location.

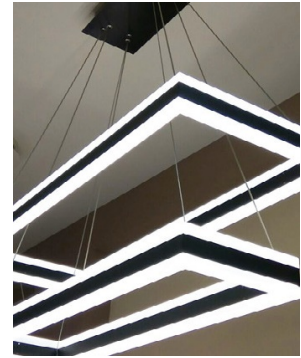

Style



Square driver with cable in the corner

Rectangular driver with cable in the corner

Rectangular driver with cable in the corner


ORDERING INFORMATION Example: (12274-1-8-16-30K-WH-AC60-E)

Model	Rings	Color Temp	Dimming Control	Finish	Mounting	Style	Options
12274	1 Tier 1-8-16 (8" X 16" 20 Watt 1700 Lumen) 1-8-24 (12" X 24" 30 Watt 2550 Lumen) 1-16-32 (16" X 32" 40 Watt 3400 Lumen) 1-20-40 (20" X 40" 50 Watt 4250 Lumen) 1-24-48 (24" X 48" 60 Watt 5100 Lumen) 2 Tier 2-8-16 (8" X 16" + 12" X 24" 50 Watt 4250 Lumen) 2-16-32 (16" X 32" + 20" X 40" 60 Watt 5100 Lumen) 2-20-40 (20" X 40" + 24" X 48" 90 Watt 7650 Lumen) 3 Tier 3-8-16 (8" X 16" + 12" X 24" + 16" X 32" 90 Watt 7650 Lumen) 3-16-32 (16" X 32" + 20" X 40" + 24" X 48" 150 Watt 12750 Lumen)	CS Standard Color Temperature Switch 3000K, 3500K & 4000K CCT Color Temperature Tuning From 3000K to 4000K RGBW3K RGBW + 3000K Color Temp RGBW4K RGBW + 4000K Color Temp	010 Standard 0-10V Dimming DMX DMX ZB ZigBee Control	Standard WH White BK Black SL Silver BR Oil Rubbed Bronze Premium OR Hermes Orange YE Bijan Yellow RE Fire Engine Red Plated PL Platinum RG Rose Gold BG Burnished Gold	AC60 Standard 5ft Adjustable Aircraft Cable AC120 10ft Adjustable Aircraft Cable AC180 15ft Adjustable Aircraft Cable AC240 20ft Adjustable Aircraft Cable	E Standard Square driver with cable in the corner G Rectangular driver with cable in the corner I Remote driver with cable in the corner	CCT-C Color Temperature Tuning Wall Control <i>More information on Pg 3</i> RGB-C RGBW Wall Control <i>More information on Pg 3</i> RGB/CCT-R RGBW / Color Temperature Handheld Remote <i>More information on Pg 3</i> REM5 5W Remote Emergency Backup Battery REM10 10W Remote Emergency Backup Battery REM17 17W Remote Emergency Backup Battery


1 Must be paired with DMX or ZigBee Driver

1 TIER


8" X 16" | 20W

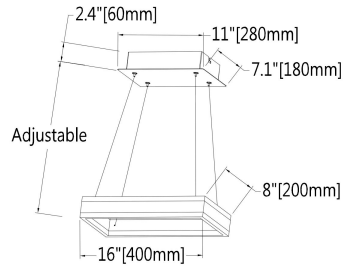


12" X 24" | 30W

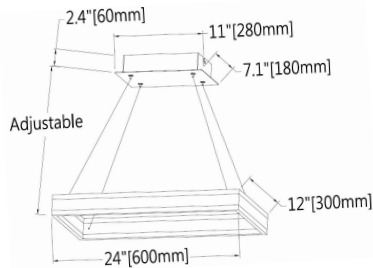


16" X 32" | 40W

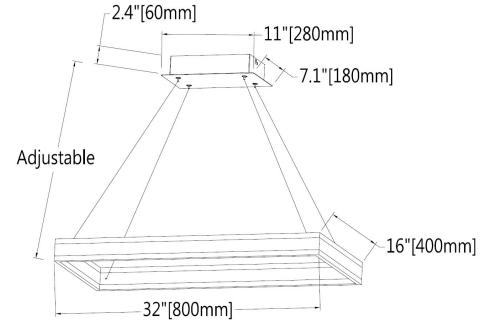

20" X 40" | 50W

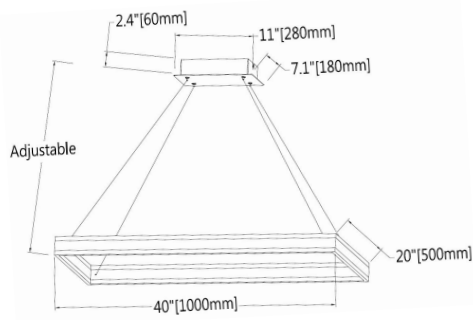


24" X 48" | 60W

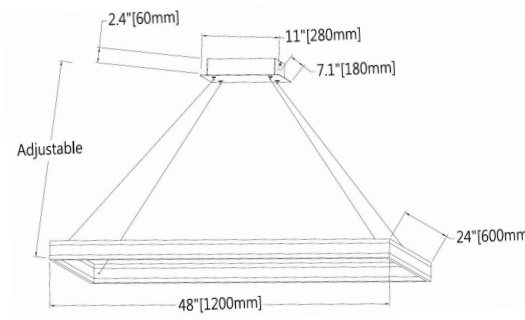


2 TIER


8" X 16" + 12" X 24" | 50W

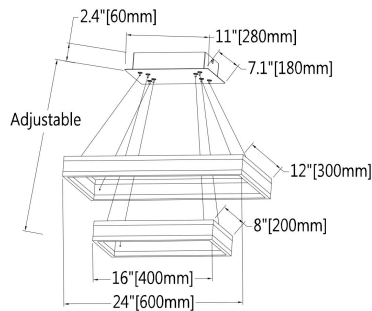

16" X 32" + 20" X 40" | 60W

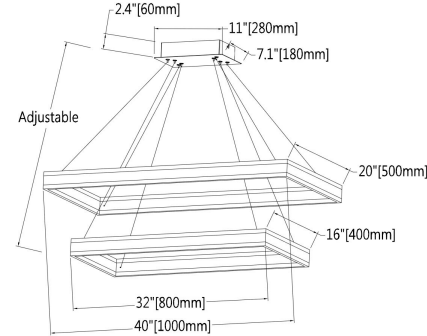


20" X 40" + 24" X 48" | 90W

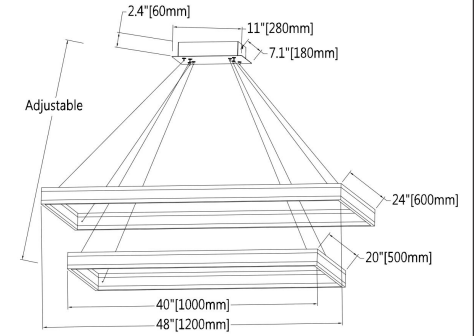


3 TIER

8" X 16" + 12" X 24" + 16" X 32" | 90W

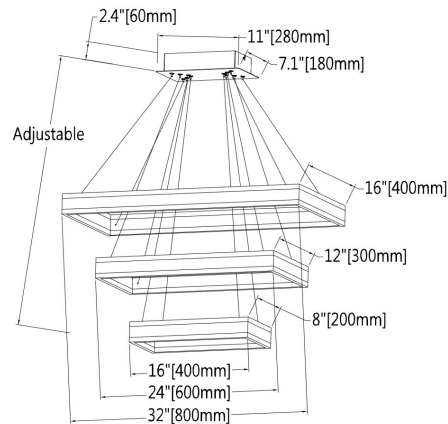

16" X 32" + 20" X 40" + 24" X 48" | 90W

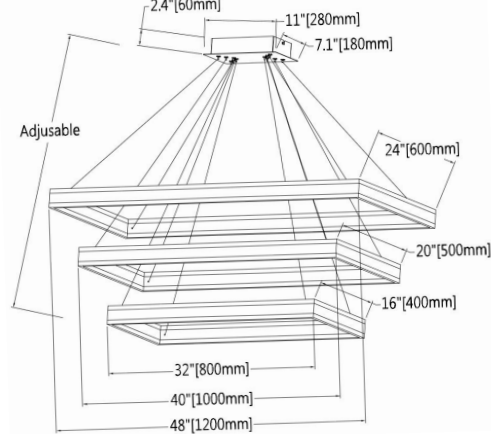

Control	DMX Compatible	ZigBee Compatible
 <p>CCT Wall Control</p>	✓	✓
 <p>RGBW Wall Control</p>	✓	✓
 <p>RGBW/CCT Handheld Remote Control</p>	✗	✓
 <p>Alexa Echo Plus, Google Home & other smart Speakers <i>Device must be Zigbee 8.0 Compatible</i></p>	✗	✓
 <p>iOS / Android Application <i>Alexa Echo Plus, Google Home or other ZigBee 8.0 Compatible smart speaker needed for operation</i></p>	✗	✓