



Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The 12400-6P Architectural LED Pendant-Mount Direct Down Light is designed for higher wattage capabilities and indoor and outdoor use. The 12400-6P is an ideal solution for commercial areas and displays.

FEATURES

H 7.75" x Dia 5.75"
Construction: 6061 marine grade corrosion resistant aluminum
Beam Angle: 120°
Voltage: 120V (50/60 Hz)
Wattage: 10W
Dimmable: TRIAC/ELV
Operating Frequency: 120 Hz
CRI: 80
Life: 50,000 Hours (L70)
Flame Rating: 5VA
Listings: UL listed for damp locations,
 Made in America

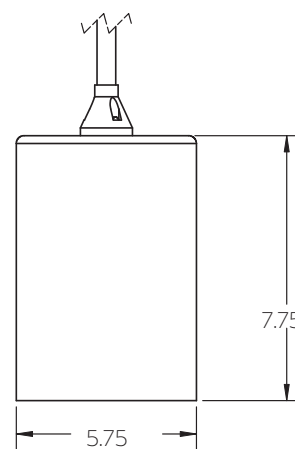

ORDERING INFORMATION Example: (12400-6P-30K-WH-DS)

Model	LED Lamp ¹	Finish	Mounting	Options
12400-6P	27K 2700K 864 Lumens 30K 3000K 960 Lumens 35K 3500K 1120 Lumens 40K 4000K 1280 Lumens	WH White BK Black GY Grey BR Bronze SA Satin Aluminum GR Green SB Satin Brass AB Antique Brass R Rust	DS 24" Stem S 24" Sloped Ceiling Stem DC-W 36" White Cord DC-B 36" Black Cord	AG Anti-Glare

¹90 CRI available on request

COMPATIBLE DIMMERS FOR STATIC WHITE

Manufacturer	Model	Type
Leviton	ILLUMATECH IPL06	LEADING EDGE
Lutron	NOVA T NTLV-600	LEADING EDGE
Lutron	SKYLARK S-600	LEADING EDGE
Leviton	IG4005 6631	LEADING EDGE
Lutron	LUMEA LG-600P	LEADING EDGE
Leviton	VPE06	TRAILING EDGE
Lutron	SELV-303P	TRAILING EDGE

