

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Our antimicrobial, architectural LED troffer light incorporates a durable, commercial-grade design with antimicrobial white paint to resist bacteria, rust and corrosion. Providing a contemporary design and indirect lighting for even high-CRI LED light distribution, this center basket troffer is perfect for commercial applications, such as offices, medical facilities, gyms and warehouses, the fully enclosed high-output LED light provides nearly 10,000 lumens in either of its 1-foot x 4-foot, 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with bi-level, tri-level, tunable white 0-10V dimming.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Mounting: Mounts to T-Bar ceiling

Lens: Glare-free snap-in frosted acrylic for even distribution


Voltage: 120-277V

Finish: White antimicrobial finish

Life: 54,000 hours

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

Listings: cULus, DLC Premium, Suitable for damp locations, Made in USA

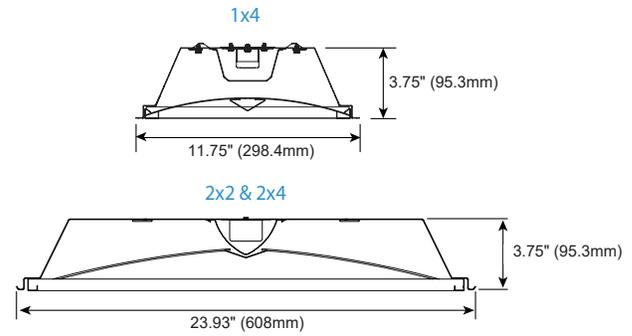

ORDERING INFORMATION Example: (12504-2x4-30K-8-010)

Model	Size Wattage Lumen	Color Temp	CRI	Dimming	Warranty	Options
12504	1x4	27K¹	8	010	Blank <small>Standard</small>	EM5
	1425	2700K	80+	0-10V 10%-100%	5 Year Warranty	5W EM Battery Backup
	25 Watts 2498 Lumens	30K	9	BLS	W7	EM8
	1441	3000K	90+	Bi-Level Step Dimming 50%/100%	7 Year Warranty	8W EM Battery Backup
	41 Watts 4193 Lumens	35K		BLSXX	W10	EM16
	1454	3500K		Bi-Level Step Dimming Replace X with Percentage from 10%-90%	10 Year Warranty	16W EM Battery Backup
	54 Watts 5588 Lumens	40K		TLS		EM25
	2x2	50K		Tri-Level Step Dimming 30%/70%/100%		OCDH
	2228	5000K		TLSXX		Occupancy Sensor w/ Daylight Harvesting
	28 Watts 3327 Lumens	Tunable White		Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		
	2236	TW2065²		050		
	36 Watts 4380 Lumens	Tunable White		Tunable White 0-10V		
	2244	2000-6500K				
	44 Watts 5304 Lumens	TW2750²				
	2x4	Tunable White				
	2428	2700-5000K				
	28 Watts 3668 Lumens					
	2436					
	36 Watts 4828 Lumens					
	2444					
	44 Watts 5847 Lumens					
	2456					
	56 Watts 7461 Lumens					
	2468					
	68 Watts 9062 Lumens					

¹ Must be paired with 90+ CRI option
² Must be paired with 050 driver