

Project Name:

Type:

Quantity:

## FIXTURE SPECIFICATIONS

### INTENDED USE

Our antimicrobial, recessed shallow basket LED troffer light incorporates a durable, commercial-grade design with antimicrobial white paint to resist bacteria, rust and corrosion. Providing indirect light for even distribution, this center basket troffer is perfect for commercial applications, such as offices, medical facilities, gyms and warehouses, the fully enclosed high-output LED light provides nearly 6,000 lumens in either of its 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with Lutron Vive, Wattstopper, Enlighted, IR-TEC, EasySense and color-changing RGB+W. Assembled in the USA, our troffer ceiling light is available with Philips Xitanium 0-10V or Hi-Lume 1% EcoSystem dimming. Design for recessed-mounting in exposed t-bar ceilings.

### FEATURES

**Construction:** Die-formed and welded 22-gauge cold rolled steel  
**Color Temperature:** Field adjustable 3500K/4000K/5000K selectable switch

**CRI:** 80

**Mounting:** Mounts to T-Bar ceiling

**Lens:** Glare-free snap-in frosted acrylic for even distribution



**Voltage:** 120-277V

**Finish:** White antimicrobial finish

**Life:** 54,000 hours

**Warranty:** 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

**Listings:** cULus, DLC Premium, Suitable for damp locations, Assembled in the USA

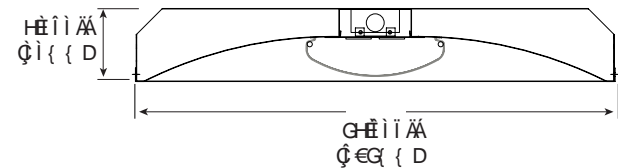

AV - Optional Air Vents



## ORDERING INFORMATION Example: (12505-G-2234-010-EM5)

Model	Trim	Size   Wattage   Lumen	Dimming	Warranty	Options
12505	G Grid	<b>2234</b> 2x2   30W, 35W, 40W   3750lm, 4375lm, 5000lm	<b>010</b> 0-10V 10%-100%	<b>Blank</b> <small>Standard</small> 5 Year Warranty	<b>EM5</b> 5W EM Battery Backup
	F Flange	<b>2445</b> 2x4   34W, 38W, 45W   4250lm, 4750lm, 5625lm	<b>BLS</b> Bi-Level Step Dimming 50%/100% <b>BLSXX</b> Bi-Level Step Dimming Replace X with Percentage from 10%-90% <b>TLS</b> Tri-Level Step Dimming 30%/70%/100% <b>TLSXX</b> Tri-Level Step Dimming Replace X and X with Percentages from 10%-90% <b>050</b> Tunable White 0-10V	<b>W7</b> 7 Year Warranty <b>W10</b> 10 Year Warranty	<b>EM8</b> 8W EM Battery Backup <b>EM16</b> 16W EM Battery Backup <b>EM25</b> 25W EM Battery Backup <b>OCDH</b> Occupancy Sensor w/ Daylight Harvesting <b>ELCU-200</b> Fail-to-on Emergency lighting, UL924 <b>AV</b> Air Vents