

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Our antimicrobial, recessed center basket LED troffer light incorporates a durable, commercial-grade design with antimicrobial white paint to resist bacteria, rust and corrosion. Providing indirect light for even distribution, this center basket troffer is perfect for commercial applications, such as offices, medical facilities, gyms and warehouses, the fully enclosed high-output LED light provides up to 10,000 lumens in either of its 1-foot x 4-foot, 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with Lutron Vive, Wattstopper, Enlighted, IR-TEC, EasySense and color-changing RGB+W. Assembled in the USA, our troffer ceiling light is equipped with Philips Xitanium 0-10V dimming.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Mounting: Mounts to T-Bar ceiling

Lens: Glare-free snap-in ribbed acrylic diffuser for even light distribution



Voltage: 120-277V

Finish: Antimicrobial coating

Life: 54,000 hours

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

Listings: cULus Listed, IC Rated, LM80, CEC Compliant EM, Assembled in the USA

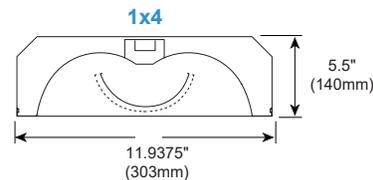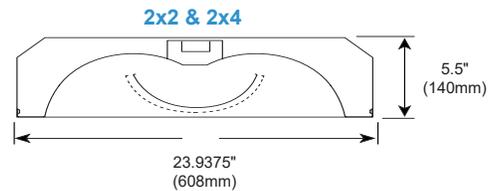

ORDERING INFORMATION Example: (12506-1436-27K-8-010)

Model	Size Wattage Lumen			Color Temp	CRI	Dimming	Warranty	Options
12506	1x4	2x2	2x4	27K ¹	8	010	Blank <small>Standard</small>	EM5
	1436	2227	2436	2700K	80+	0-10V 10%-100%	5 Year Warranty	5W EM Battery Backup
	36W 3124 lms	27W 3508 lms	36W 5128 lms	30K	9	BLS	W7	EM8
	1444	2236	2444	3000K	90+	Bi-Level Step Dimming 50%/100%	7 Year Warranty	8W EM Battery Backup
	44W 3819 lms	36W 4678 lms	44W 6268 lms	35K		BLSXX	W10	EM16
	1454	2244	2454	3500K		Bi-Level Step Dimming Replace X with Percentage from 10%-90%	10 Year Warranty	16W EM Battery Backup
	54W 4740 lms	44W 5716 lms	54W 7692 lms	40K		TLS		EM25
		2254	2468	4000K		Tri-Level Step Dimming 30%/70%/100%		25W EM Battery Backup
		54W 7015 lms	68W 9687 lms	50K		TLSXX		OCDH
				5000K		Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		Occupancy Sensor w/ Daylight Harvesting
				Tunable White		050		GTD
				TW2065 ²		Tunable White 0-10V		Bodine Generator Transfer Device
			Tunable White 2000-6500K					
			TW2750 ²					
			Tunable White 2700-5000K					

¹ Must be paired with 90+ CRI option
² Must be paired with 050 driver