

Project Name:

Type:

Quantity:

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

Our antimicrobial, low-profile recessed LED troffer light incorporates a durable, commercial-grade design with antimicrobial white paint to resist bacteria, rust and corrosion. Perfect for commercial applications, such as offices, medical facilities, gyms and warehouses, the fully enclosed high-output LED light provides up to 13,000 lumens in either of its 1-foot x 4-foot, 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with Lutron Vive, Wattstopper, IR-TEC, EasySense and color-changing RGB+W. Assembled in the USA, our troffer ceiling light is equipped with Philips Xitanium 0-10V dimming.

**FEATURES**

**Construction:** Die-formed and welded 22-gauge cold rolled steel

**Wet Location:** Sealed with gaskets between the lens, door frame and housing guard against moisture

**Mounting:** Mounts to T-Bar ceiling

**Lens:** Glare-free snap-in frosted acrylic for even distribution



**Voltage:** 120-277V

**Finish:** White antimicrobial finish


**Life:** 54,000 hours

**Warranty:** 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

**Listings:** cULus Listed for Wet Location (covered ceilings only), DLC, LM79, CEC Compliant EM, Assembled in the USA

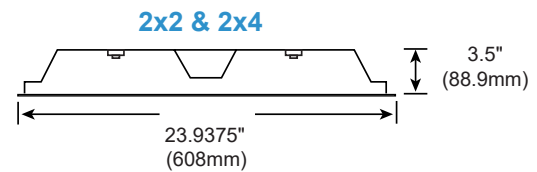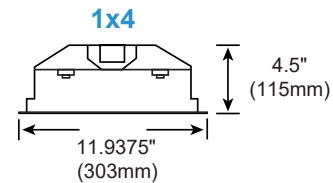

**Standard Gaskets Provided**



**ORDERING INFORMATION Example: (12507-1436-27K-8-010)**

Model	Size   Wattage   Lumens	Color Temp	CRI	Dimming	Warranty	Options		
12507	<b>1x4</b>	<b>2x2</b>	<b>2x4</b>	<b>27K<sup>1</sup></b> 2700K	<b>8</b> 2700K	<b>010</b> 0-10V 10%-100%	<b>Blank Standard</b> 5 Year Warranty	<b>EM5</b> 5W EM Battery Backup
	<b>1436</b> 36 Watts   4361 Lumens	<b>2227</b> 27 Watts   3598 Lumens	<b>2436</b> 36 Watts   4850 Lumens	<b>30K</b> 3000K	<b>9</b> 80+	<b>BLS</b> Bi-Level Step Dimming 50%/100%	<b>W7</b> 7 Year Warranty	<b>EM8</b> 8W EM Battery Backup
	<b>1444</b> 44 Watts   5584 Lumens	<b>2236</b> 36 Watts   4536 Lumens	<b>2444</b> 44 Watts   5798 Lumens	<b>35K</b> 3500K	<b>90+</b>	<b>BLSXX</b> Bi-Level Step Dimming Replace X with Percentage from 10%-90%	<b>W10</b> 10 Year Warranty	<b>EM16</b> 16W EM Battery Backup
	<b>1454</b> 54 Watts   6404 Lumens	<b>2244</b> 44 Watts   5384 Lumens	<b>2454</b> 54 Watts   7134 Lumens	<b>40K</b> 4000K		<b>TLS</b> Tri-Level Step Dimming 30%/70%/100%	<b>EM25</b> 25W EM Battery Backup	<b>OCDH</b> Occupancy Sensor w/ Daylight Harvesting
	<b>1472</b> 72 Watts   9339 Lumens	<b>2254</b> 54 Watts   6608 Lumens	<b>2472</b> 72 Watts   9238 Lumens	<b>50K</b> 5000K		<b>TLSXX</b> Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%	<b>GTD</b> Bodine Generator Transfer Device	
	<b>14108</b> 108 Watts   13713 Lumens	<b>2272</b> 72 Watts   9072 Lumens	<b>24108</b> 108 Watts   13088 Lumens	<b>Tunable White</b>		<b>050</b> Tunable White 0-10V		
		<b>22108</b> 108 Watts   13216 Lumens		<b>TW2065<sup>2</sup></b> Tunable White 2000-6500K				
				<b>TW2750<sup>2</sup></b> Tunable White 2700-5000K				

<sup>1</sup> Must be paired with 90+ CRI option  
<sup>2</sup> Must be paired with 050 driver