

Project Name:

Type:

Quantity:

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

This fully enclosed 1-ft x 4-ft, 2-ft x 2-ft, or 2-ft x 4-ft LED backlit panel comes with an antimicrobial coating to resist bacteria, rust and corrosion. Perfect for healthcare interiors such as doctor's offices, urgent cares and other medical facilities, this LED panel light packs 6,250 lumens in its 50-watt version. 120-277Vac for commercial-grade applications.

**FEATURES**

**Construction:** Die-formed and welded 22-gauge cold rolled steel

**Driver:** 0-10V dimmer driver (10%-100%)

**CRI:** 80+

**Voltage:** 120-277V


**Finish:** White antimicrobial finish

**Operating Temperature:** -4°F (-20°C) ~ 104°F (40°C)


**Life:** 60,000 hours

**Warranty:** 5 years carefree for parts & components (Labor not included)





**Listings:** UL, RoHS, DLC Premium, LM80, LM79, Assembled in the USA

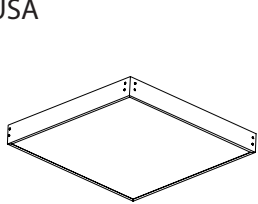

**Optional**  
S - Surface Mount Kit

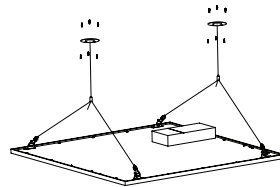

**Optional**  
P - 66" Aircraft Cable Pendant Mount

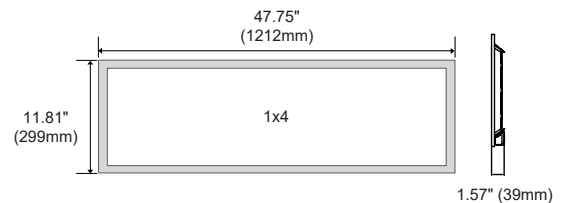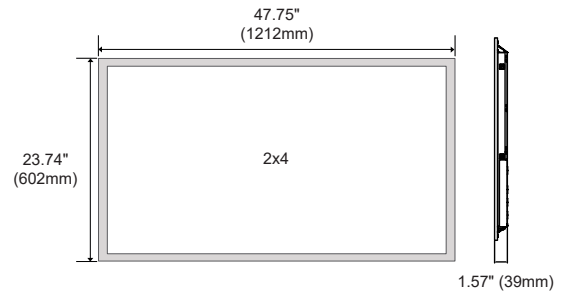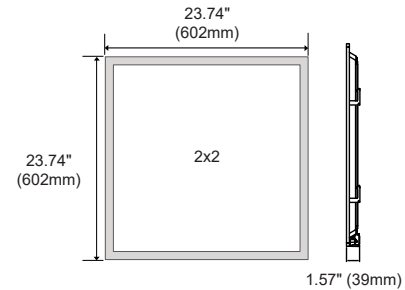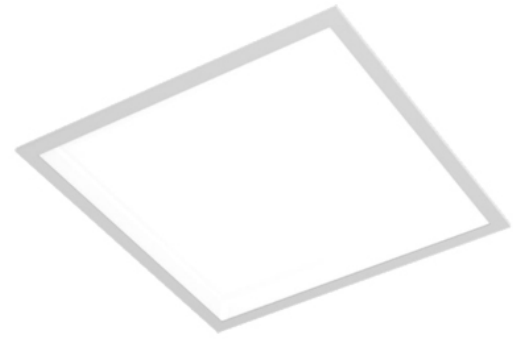

Alcon 12510 Antimicrobial LED Back-Lit Panel Light

**ORDERING INFORMATION** Example: (12510-R-1430-35K)

Model	Mounting	Size   Wattage   Lumen	Color Temp	Options
12510	R	<b>1430</b>	<b>35K</b>	<b>EM-ELCU-200<sup>1</sup></b> Internal Emergency Back Up with Fail-to-on Emergency lighting, UL924 (1530 Lumen)
	T-Bar Recessed	1x4   30 Watts   3750 Lumens	3500K	
	P	<b>2230</b>	<b>40K</b>	
	Pendant	2x2   30 Watts   3750 Lumens	4000K	
	S	<b>2236</b>	<b>50K</b>	
	Surface Mount	2x2   36 Watts   4500 Lumens	5000K	
		<b>2440</b>		
		2x4   40 Watts   5000 Lumens		
		<b>2450</b>		
		2x4   50 Watts   6250 Lumens		

<sup>1</sup> Not applicable with 1x4