

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The commercial-grade linear, antimicrobial pendant, wall or surface-mounted LED Ceiling light is ideal for healthcare interiors. This fully enclosed, slim, modern linear fixture with antimicrobial finish provides perfect downlighting for doctor's offices, hospitals and other medical facility applications. Built in cold-rolled, welded and die-formed 22-gauge steel with a glare-free, snap-in frosted acrylic lens, our damp location-rated product features 120 to 277 voltage with a standard 80+ Color Rendering Index (90+ is optional). The light includes a die-formed steel channel with knockouts for easy mounting and versatile configuration.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Glare-free snap-in frosted acrylic for even distribution


Voltage: 120-277V

Finish: White antimicrobial finish

Life: 50,000 hours

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

Listings: cULus Listed, DLC Listed, Suitable for damp locations, CEC Compliant EM, Assembled in the USA

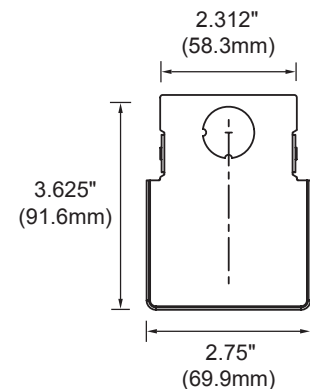

ORDERING INFORMATION Example: (12513-S-S-2-D218-30K-8-010)

| | | | Single Run | | | | | | | | |
|-------|---------|--------------------------|----------------------------|------------------------|---------------------|--------------------------|-------|--|-------------------------------|---------------------------|---|
| Model | Mount | Shape | 2', 4' or 8' | Wattage | Lumen | Color Temp | CRI | Dimming | Pendant Mounting | Warranty | Options |
| 12513 | S | S | Cont. Run | 2 Foot | | 27K ¹ | 8 | 010 | Blank | Blank ^{Standard} | EM5 |
| | Surface | Single Run | Specify Run Length in Feet | D218 | | 2700K | 80+ | 0-10V 10%-100% | None Required | 5 Year Warranty | 5W EM Battery Backup |
| | W | CR | | 18 Watts 2514 Lumens | 30K | | 9 | BLS | AC48 | W7 | EM8 |
| | Wall | Continuous Run | | D227 | | 3000K | 90+ | Bi-Level Step Dimming 50%/100% | 48" Adjustable Aircraft Cable | 7 Year Warranty | 8W EM Battery Backup |
| | P | | | 36 Watts 3941 Lumens | 35K | | BLSXX | AC96 | W10 | 10 Year Warranty | EM16 |
| | Pendant | | | D236 | | 3500K | | Bi-Level Step Dimming Replace X with Percentage from 10%-90% | 96" Adjustable Aircraft Cable | | 16W EM Battery Backup |
| | | | | 36 Watts 4945 Lumens | 40K | | TLS | ST24 | | DD | |
| | | | | D427 | | 4000K | | Tri-Level Step Dimming 30%/70%/100% | 24" Stem Mount Kit | | Integrated Daylight Dimming Photosensor |
| | | | | 4 Foot | 50K | | TLSXX | ST48 | | OS | |
| | | | | D436 | | 5000K | | Tri-Level Step Dimming Replace X and X with Percentages from 10%-90% | 48" Stem Mount Kit | | Integrated Occupancy Sensor |
| | | | | 27 Watts 3873 Lumens | Tunable White | | 050 | | | | |
| | | | | D454 | | Tunable White 2000-6500K | | Tunable White 0-10V | | | |
| | | | | 54 Watts 7513 Lumens | TW2750 ² | | | | | | |
| | | | | D472 | | Tunable White 2700-5000K | | | | | |
| | | 72 Watts 10017 Lumens | | | | | | | | | |
| | | 8 Foot | | | | | | | | | |
| | | D827 | | | | | | | | | |
| | | 27 Watts 4140 Lumens | | | | | | | | | |
| | | D836 | | | | | | | | | |
| | | 36 Watts 5446 Lumens | | | | | | | | | |
| | | D854 | | | | | | | | | |
| | | 56 Watts 8006 Lumens | | | | | | | | | |
| | | D872 | | | | | | | | | |
| | | 72 Watts 10704 Lumens | | | | | | | | | |
| | | D8108 | | | | | | | | | |
| | | 108 Watts 14454 Lumens | | | | | | | | | |
| | | D8144 | | | | | | | | | |
| | | 144 Watts 19271 Lumens | | | | | | | | | |

¹ Must be paired with 90+ CRI option
² Must be paired with 050 driver