

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Illuminate today's doctor's office or other healthcare space with this antimicrobial low bay center basket LED pendant or surface-mounted light. Suited for damp locations. Our surface-mounted or pendant light is die-formed and cold-rolled in heavy gauge steel for strength and durability. Whether for uplighting or downlighting, the center basket design reduces shadows and glare with reflected light. Powder-coated antimicrobial paint resists rust and corrosion.



FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Mounting: Surface mount compatible with most ceiling types. Stem kit available for pendant mount

Lens: Glare-free snap-in frosted acrylic for even distribution

Voltage: 120-277V



Finish: White antimicrobial finish

Life: 54,000 hours

Ambient Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)

Warranty: 5 years (static colors) and 2 years (tunable white)
carefree for parts & components (labor not included)

Listings: cULus, LM80, CEC Compliant EM

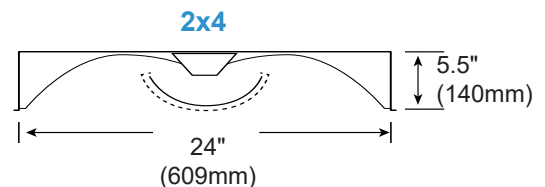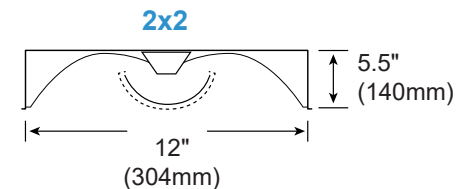

ORDERING INFORMATION Example: (12514-S-1436-27K-9-010)

Model	Mounting	Size Wattage Lumen			Color Temp	CRI	Dimming	Warranty	Options
12514	S	1x4	2x2	2x4	27K ²	8	010	Blank ^{Standard}	EM5
	Surface	1436	2227	2444 ¹	2700K	80+	0-10V 10%-100%	5 Year Warranty	5W EM Battery Backup
	P	36 Watts 2917 Lumens	27 Watts 2737 Lumens	44 Watts 4865 Lumens	30K	9	BLS		EM8
	Pendant	1444 ¹	2236	2454	3000K	90+	Bi-Level Step Dimming 50%/100%	W7	8W EM Battery Backup
		44 Watts 3056 Lumens	36 Watts 3234 Lumens	54 Watts 5613 Lumens	35K		BLSXX	7 Year Warranty	EM16
		2244 ¹	44 Watts 4105 Lumens	2468 ¹	3500K		Bi-Level Step Dimming	W10	16W EM Battery Backup
		2254	54 Watts 4910 Lumens		40K		Replace X with Percentage from 10%-90%	10 Year Warranty	EM25
				4000K		TLS		25W EM Battery Backup	
				50K		Tri-Level Step Dimming 30%/70%/100%		OCDH	
				2065 ³		TLSEX		Occupancy Sensor w/ Daylight Harvesting	
				Tunable White 2000-6500K		Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		ELCU-200	
				2750 ³		050		Fail-to-on Emergency lighting, UL924	
				Tunable White 2700-5000K		Tunable White 0-10V		GTD	
								Bodine Generator Transfer Device	

1 Can not be paired with 010 Dimming Driver

2 Must be paired with 90+ CRI option

3 Must be paired with 050 driver