

## FIXTURE SPECIFICATIONS

### INTENDED USE

This linear wall, surface or pendant mounted LED light suits healthcare lighting project demands, including applications such as rehab facilities, surgical centers and hospital rooms. Our human-centric lighting product is made with a tamper-resistant opal glass lens in America. The damp location-rated downlight is finished in a white antimicrobial coat of paint.

### FEATURES

**Lens:** Tamper Resistant Opal Glass

**Voltage:** 120-277V, 50/60 Hz



**Finish:** White Antimicrobial Finish

**Operating Temperature:** -4°F (-20°C) ~ 122°F (50°C)


**Life:** 54,000 Hours

**Warranty:** Standard 5 Years Carefree for Parts & Components (Labor Not Included)

**Listing:** UL listed, ARRA compliant, Suitable for Damp Locations, Made in the USA



12518-20L			12518-26L		
Illuminance at a Distance			Illuminance at a Distance		
Center Beam FC	Beam Width		Center Beam FC	Beam Width	
1.3FT 496 FC	5.0 FT	6 FT	1.3FT 536 FC	5.0 FT	6 FT
3.3FT 132 FC	9.8 FT	11.6 FT	3.3FT 142 FC	9.8 FT	11.6 FT
5.0FT 57.4 FC	14.8 FT	17.5 FT	5.0FT 62 FC	14.8 FT	17.5 FT
6.7FT 31.9 FC	19.8 FT	23.5 FT	6.7FT 34.5 FC	19.8 FT	23.5 FT
8.3FT 20.8 FC	24.6 FT	29.1 FT	8.3FT 22.5 FC	24.6 FT	29.1 FT
10.0FT 14.3 FC	29.6 FT	35.1 FT	10.0FT 15.5 FC	29.6 FT	35.1 FT
■ Vert. Spread: 111.9° ■ Horiz. Spread: 120.6°			■ Vert. Spread: 111.9° ■ Horiz. Spread: 120.6°		

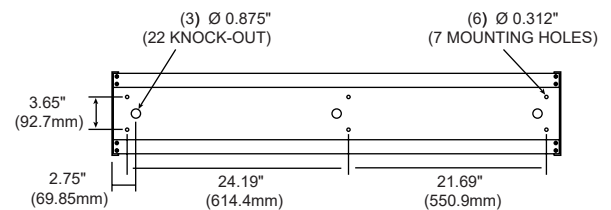

## ORDERING INFORMATION Example: (12518-S-14L-27K-80-010)

Model	Mounting	Length   Wattage   Lumen	Color Temp	CRI	Dimming	Warranty	Options
12518	S	14L	27K <sup>1</sup>	80	010	Blank <sup>Standard</sup>	EM5
	Surface	4 Foot   36 Watts   1420 lms	2700K	80+ CRI	0-10V 10%-100%	5 Year Warranty	5W EM Battery Backup
	W	20L	30K	90	BLS	7 Year Warranty	EM8
	Wall	4 Foot   40 Watts   2023 lms	3000K	90+ CRI	Bi-Level Step Dimming 50%/100%	W10	8W EM Battery Backup
	P	26L	35K		BLSXX	10 Year Warranty	EM16
	Pendant	4 Foot   54 Watts   2626 lms	3500K		Bi-Level Step Dimming Replace X with Percentage from 10%-90%		16W EM Battery Backup
		38L	40K		TLS		EM25
		4 Foot   72 Watts   3831 lms	4000K		Tri-Level Step Dimming 30%/70%/100%		25W EM Battery Backup
			50K		TLSXX		PO
			5000K		Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		Power Outlet with Ground