

FIXTURE SPECIFICATIONS

INTENDED USE

Antimicrobial LED lighting that mounts on either walls or surfaces, such as ceilings, is ideal for healthcare projects, such as nursing homes, senior living and hospital, medical and doctor reception areas and lobbies. This commercial-grade product, which is also suitable for damp locations, is manufactured in the United States of America.



FEATURES

Lens: Frosted Acrylic Glass

Voltage: 120-277V, 50/60 Hz

Finish: White Anti-Microbial Finish

Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)



Life: 54,000 Hours

Warranty: Standard 5 Years Carefree for

Parts & Components

(Labor Not Included)

Listing: UL listed, ARRA compliant, Suitable for Damp Locations, Made in the USA

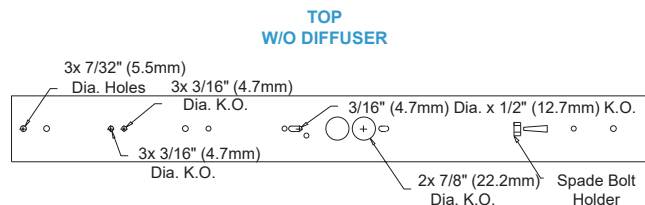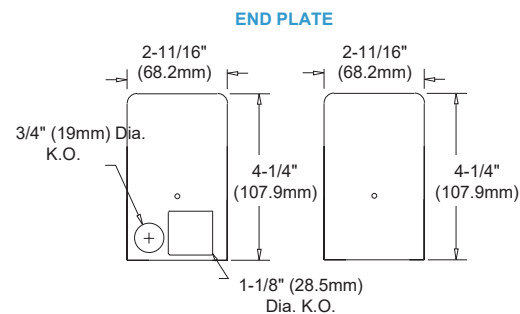

ORDERING INFORMATION Example: (12520-S-14L-30K-80-10)

Model	Mounting	Length Wattage Lumen	Color Temp	CRI	Dimming	Warranty	Options
12520	S Surface W Wall	14L 2 Foot 18 Watts 1420 lms	27K¹ 2700K	80 80+ CRI	010 0-10V 10%-100% BLS Bi-Level Step Dimming 50%/100% BLSXX Bi-Level Step Dimming Replace X with Percentage from 10%-90% TLS Tri-Level Step Dimming 30%/70%/100% TLSXX Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%	Blank <small>Standard</small> 5 Year Warranty W7 7 Year Warranty W10 10 Year Warranty	EM5 5W EM Battery Backup EM7 7W EM Battery Backup PO Power Outlet with Ground
		20L 2 Foot 27 Watts 2023 lms	30K 3000K	90 90+ CRI			
		26L 4 Foot 36 Watts 2626 lms	35K 3500K				
		38L 4 Foot 54 Watts 3831 lms	40K 4000K				
			50K 5000K				

¹ Only compatible with 90+ CRI option