
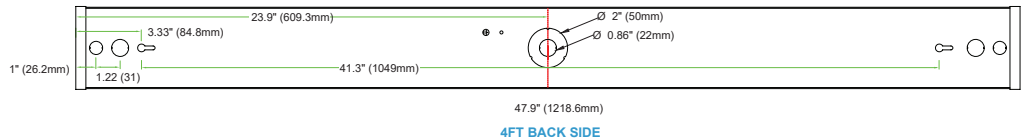
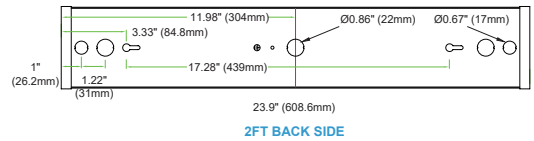


FIXTURE SPECIFICATIONS

INTENDED USE

Antimicrobial LED lighting suited for today's healthcare applications, including medical and doctors' offices, hospital rooms, lobbies, stairwells and hallways. Suitable for surface and ceiling mount. The commercial-grade linear downlight features an optional ultrasonic occupancy sensor with bi-level step dimming and includes a variety of color temperatures. The product comes in three lengths—two, four and eight feet—with an emergency backup battery and is rated for damp locations.



-UOS
Ultrasonic Occupancy Sensors
(Optional)



ORDERING INFORMATION Example: (12521-S-20L-30K-80-010)

Model	Length Wattage Lumen	Color Temp	CRI	Dimming	Warranty	Options
12521	20L 2 Foot 18 Watts 2056 lms	27K¹ 2700K	80 80+ CRI	010 0-10V 10%-100%	Blank <small>Standard</small> 5 Year Warranty	EM5 5W EM Battery Backup
	28L 2 Foot 27 Watts 2887 lms	30K 3000K	90 90+ CRI	BLS Bi-Level Step Dimming	W7 7 Year Warranty	EM8 8W EM Battery Backup
	36L 2 Foot 36 Watts 3690 lms	35K 3500K		BLSXX 50%/100%	W10 10 Year Warranty	EM16 16W EM Battery Backup
	37L 4 Foot 36 Watts 3717 lms	40K 4000K		Bi-Level Step Dimming		EM25 25W EM Battery Backup
	53L 4 Foot 54 Watts 5379 lms	50K 5000K		Replace X with Percentage from 10%-90%		PO Power Outlet with Ground
	70L 4 Foot 72 Watts 7044 lms			TLS Tri-Level Step Dimming		UOS Ultrasonic Occupancy Sensor
				30%/70%/100%		with Bi-level Step-Dimming
				TLSXX Tri-Level Step Dimming		
				Replace X and X with Percentages from 10%-90%		

¹ Only compatible with 90+ CRI option