

Project Name:

Type:

Quantity:


**FIXTURE SPECIFICATIONS**

**INTENDED USE**

Our wet location-rated LED wall sconce, finished in white, antimicrobial paint, mounts to a standard electrical junction box. This new product, made in America with a frosted, acrylic glass lens, 80+ Color Rendering Index (CRI) and powered by 120 to 277 voltage (50/60 Hz), is ideal for today's lobby, hallway or stairwell and hospital room. Made in the USA.

**FEATURES**

- Voltage:** 120-277V, 50/60 Hz
- Mounting:** Mounts to standard electrical junction box
- CRI:** 80+
- Finish:** White antimicrobial finish
- Lens:** Frosted acrylic glass
- Ambient Operating Temperature:** 22°F (-30°C) ~ 122°F (50°C)
- Life:** 60,000 Hours
- Warranty:** 5 Years carefree for parts & components (Labor Not Included)
- Listing:** UL listed, Made in USA, ARRA compliant, Wet Location, UL 94 HB Flame Class Rated

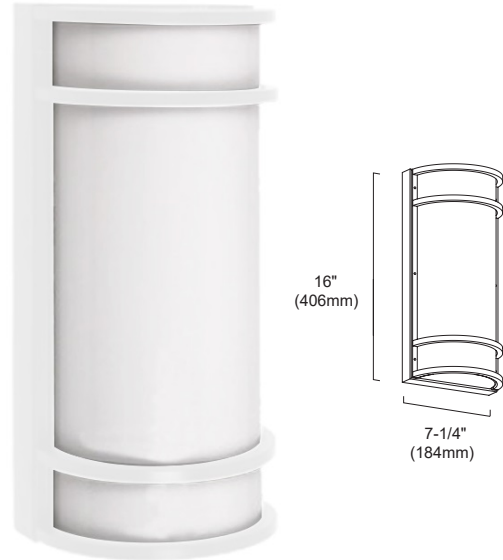

12524-14L			
Illuminance at a Distance			
	Center Beam FC	Beam Width	
1.3FT	12.9 FC	3.9 FT	2.6 FT
2.7FT	2.98 FC	8.1 FT	5.3 FT
4.0FT	1.36 FC	12.1 FT	7.9 FT
5.3FT	0.77 FC	16.0 FT	10.4 FT
6.7FT	0.48 FC	20.2 FT	13.2 FT
8.0FT	0.34 FC	24.1 FT	15.8 FT

■ Vert. Spread: 112.9°  
■ Horiz. Spread: 89.1°

12524-20L			
Illuminance at a Distance			
	Center Beam FC	Beam Width	
1.3FT	17.6 FC	3.9 FT	2.6 FT
2.7FT	4.07 FC	8.1 FT	5.3 FT
4.0FT	1.85 FC	12.1 FT	7.9 FT
5.3FT	1.06 FC	16.0 FT	10.4 FT
6.7FT	0.66 FC	20.2 FT	13.2 FT
8.0FT	0.46 FC	24.1 FT	15.8 FT

■ Vert. Spread: 112.9°  
■ Horiz. Spread: 89.1°

12524-25L			
Illuminance at a Distance			
	Center Beam FC	Beam Width	
1.3FT	21.5 FC	3.9 FT	2.6 FT
2.7FT	4.98 FC	8.1 FT	5.3 FT
4.0FT	2.27 FC	12.1 FT	7.9 FT
5.3FT	1.29 FC	16.0 FT	10.4 FT
6.7FT	0.81 FC	20.2 FT	13.2 FT
8.0FT	0.57 FC	24.1 FT	15.8 FT

■ Vert. Spread: 112.9°  
■ Horiz. Spread: 89.1°



**ORDERING INFORMATION** Example: (12524-14L-30K-010)

Model	Wattage   Lumens	Color Temperature	Dimming	Options
<b>12524</b>	<b>14L</b> 14 Watts   1427 lms	<b>30K</b> 3000K	<b>010</b> 0-10V 10%-100% <b>BLS</b> Bi-Level Step Dimming 50%/100%	<b>EM5</b> 5W EM Battery Backup <b>EM8</b> 8W EM Battery Backup <b>REM</b> Remote EM <b>REMC</b> Remote EM for Cold Weather -4°F(-20°C) ~ 122°F(50°C) <b>BG</b> Bird Guard
	<b>20L</b> 20 Watts   1946 lms	<b>35K</b> 3500K		
	<b>25L</b> 25 Watts   2380 lms	<b>40K</b> 4000K		
		<b>50K</b> 5000K		