

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Igloo Architectural LED Adjustable Accent Light Fixture** delivers direct accent surface, pendant, wall, and ceiling track lighting to commercial, hospitality and residential interior track or surface lighting applications. Architecturally styled Cylinder LED track lights feature small, unobtrusive size and are highly adjustable. Our modern LED lighting designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY

- 13000-TC Track Channel
- 13000-LC Linear Connector
- 13000-OA Outlet Adapter
- 13000-SC Slope Ceiling Track Adapter
- 13000-TB T-Bar End Feed
- 13000-FC Floating Canopy Connector
- 13000-EC End Cap
- 13000-LC Live End with Canopy
- 13000-LE Live End
- 13000-L L-Connector
- 13000-T T-Connector
- 13000-X X-Connector
- 13000-MC Mini Connector
- 13000-CP Cord and Plug Connector
- 13000-PA Pendant Adapter
- 13000-CC Conduit Connector
- 13000-CK Conduit Continuation Kit

FEATURES

Construction: Extruded Aluminum with Die-Cast Aluminum Swivel and One Piece Combination Heat Sink and Reflector Enclosure. Luminaire is Adjustable with Maximum Swivel Angle to 85° Off Center and a 325° Rotation

Reflector: Multifaceted Specular Reflector with Gasketed Glass Lens is Standard for 40° Flood.

Driver: Remote Electronic Direct Current Class 2 Driver Mounted on Large Access Junction Box


Dimming: Track Model is dimmable via 2-Wire ELV @ 120V.

SM7 option is not dimmable.

Life: 50,000 Hours L70

Warranty: 3 Years Carefree for Parts & Components (Labor Not Included)

Listings: cETL Listed

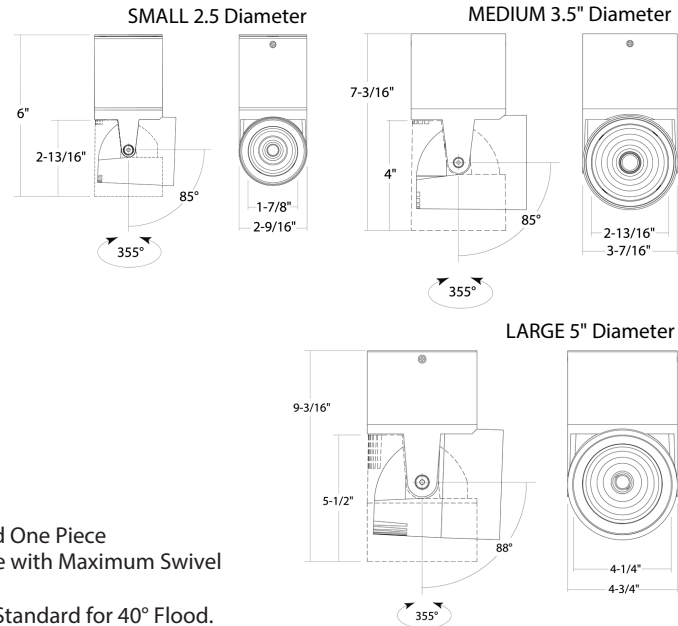

ORDERING INFORMATION Example: (13101-R-P12-SM7-T27-C90-15-BK-LV)

| Model | Mounting | Size Lumens Wattage | Color Temp | Beam Spread | Finish | Options |
|-----------------------------------|------------------------------------|--|---|---|--------------------|---|
| 13101 Track Lighting | S 4" J-Box Surface Mount | SM7¹ 2.5" Dia 10 watts 700 lumens | T27-C90 2700K 90 CRI | 15 15° Narrow Spot | BK Black | LV³ Glare Control Louver |
| | W 4" J-Box Wall Mount | SM9 2.5" Dia 15 watts 1000 lumens | T27-C97² 2700K 97 CRI | 25 25° Narrow Flood | WH White | FL Frosted Lens |
| | H H-Track | MD15 3.5" Dia 20 watts 1500 lumens | T30-C90 3000K 90 CRI | 40 40° Flood <i>Standard</i> | | |
| | P12 12" Stem Pendant | MD20 3.5" Dia 30 watts 2000 lumens | T30-C97² 3000K 97 CRI | 60³ 60° Wide Flood | | |
| | P24 24" Stem Pendant | LG25 5" Dia 30 watts 2500 lumens | T35-C90 3500K 90 CRI | | | |
| | P36 36" Stem Pendant | LG35 5" Dia 45 watts 3500 lumens | T40-C90 4000K 90 CRI | | | |
| | P48 48" Stem Pendant | | WD^{2,3} Warm Dimming 1850K - 3000K | | | |
| | P12A 12" Adjustable Stem | | | | | |
| | P24A 24" Adjustable Stem | | | | | |
| | P36A 36" Adjustable Stem | | | | | |
| | P48A 48" Adjustable Stem | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |



¹ Not Dimmable if H-Track Mounting option is selected.

² Not compatible with H-Track

³ Not compatible with LG25 or LG35