

WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

13125 INSTALLATION INSTRUCTIONS FOR: Architectural LED Wall Wash Track Light

Safety Precautions:

- 1. Read Carefully:** Prior to installation or servicing, thoroughly read and understand all safety precautions and instructions on the back side. Failure to follow these guidelines may result in serious injury, electric shock, or property damage.
 - 2. Qualified Installation:** It is strongly recommended that all wiring be performed by a licensed electrician. This fixture must be installed in compliance with all national and local electrical codes.
 - 3. Avoid Wet Conditions:** Do not handle or attempt to energize the fixture with wet hands, or while standing on wet surfaces or in water. Do not install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location
 - 4. Verify Power Source:** Ensure the power source meets the fixture's requirements. Turn off switch at main power source before installing any track or fitting.
 - Pull down the locking lever and insert "Adaptor contact" into the slot in the track.
 - Rotate adaptor 1/4 turn 90 degrees to locked position.
- Note:** Polarity line of lampholder (Grounding tab, polarity side of two fingers must point to track debossed polarity line so that the debossed polarity line of the track can be aligned with the polarity line (side) of the adaptor.
- To remove, depress the locking lever and turn 90 degrees.


Warning: To avoid the potential risk of fire and shorting, you should not under any circumstances use the connectors and end cap Without busbar stoppers (Drawings below with "X" mark) for your track system



Louver lens



Flat lens

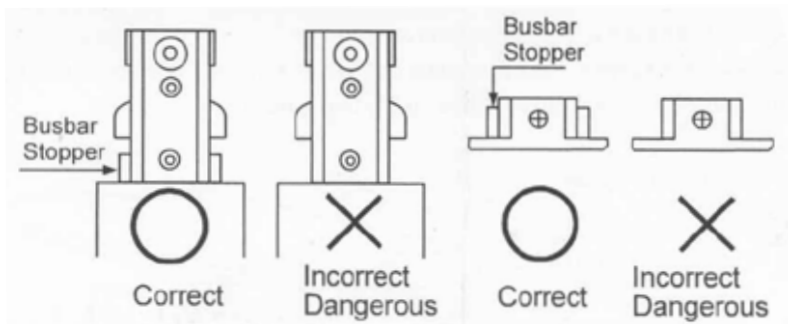

LPO and LPCO Track Hole Pattern

PART No.	No. OF HOLES	DISTANCE HOLE FROM ENDS	DISTANCE HOLE TO HOLE
LP02	2	4-3/4"	14-1/2"
LP04	2	4-3/4"	38-1/2"
LP06	3	4-3/4"	31-00"
LP08	3	4-3/4"	43-00"
LP12	5	4-3/4"	Hole 1 to 2: 31-1/8" Hole 2 to 3: 36-00"

Caution

1. To use track head on one circuit track system, the hot contact conductor at the top of the track head must always be in the lower position. To move the lever from the upper to the lower position, simply push lever down.
2. Two circuits track system is designed for use when two separately controlled circuits are needed on one section of track. Each circuit is rated for 2400 watts and will allow you to control two individual sets of fixtures.
3. To use track head on two circuits track system, the hot contact conductor at the top of track head should be in lower position for P1 circuit. For P2 circuit, move the lever from the lower to the upper position.

