

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The **Vivid Architectural LED Track Head** delivers energy efficient and clear light to commercial, hospitality and residential interior lighting applications. Our modern profiles and stylish designs offer excellent direct lighting and exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY ACCESSORIES

13000-TC	Track Channel
13000-LC	Linear Connector
13000-OA	Outlet Adapter
13000-SC	Slope Ceiling Track Adapter
13000-TB	T-Bar End Feed
13000-FC	Floating Canopy Connector
13000-EC	End Cap
13000-LC	Live End with Canopy
13000-LE	Live End
13000-L	L-Connector
13000-T	T-Connector
13000-X	X-Connector
13000-MC	Mini Connector
13000-CP	Cord and Plug Connector
13000-PA	Pendant Adapter
13000-CC	Conduit Connector
13000-CK	Conduit Continuation Kit

FEATURES

Construction: Sleek, durable die-cast aluminum body with concealed heat sink and wiring

Connector: 3-wire H-type 1-circuit & 2-circuit track(standard)

Electrical: Integral electronic constant current

Voltage: 120V

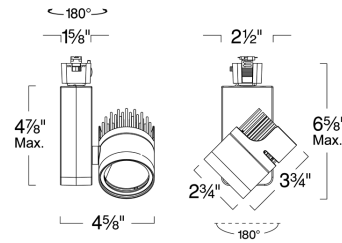
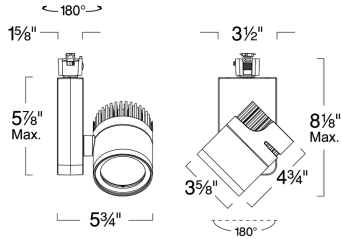
Dimming: 120V 2-wire/incandescent/ELV dimming

CRI: 80+ (Std) / 90+

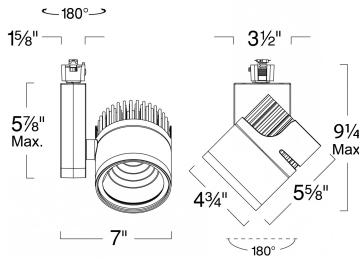
Life: 50,000 hours L70

Warranty: 5 years carefree for parts & components (labor not included)

Listings: cETL Listed, CA Title-24


10-1100L
15-1500L


30-2900L


50-4500L
60-6000L


Round Monopoint Canopy
4 7/8" Diameter
3/8" Height



Square Monopoint Canopy
3/8" Height

ORDERING INFORMATION

Example: (13127-M-R-10-1100L-T30-90-WH-SP15)

Model	Canopy Shape ¹	Lumens	Color Temp	CRI	Finish	Beam Spread	Options
13127 Vivid Track Lighting	R Round Monopoint Canopy	10-1100L 16 watts 1100 lms 15-1500L 21 watts 1500 lms	Residential T27 2700K T30 3000K WD Warm Dimming 1852K - 3000K ¹	80 Standard 90	WH White BK Black	SP15 15° Spot NF25 25° Narrow Flood	LVR Glare-Free Louver
13127-M Vivid Monopoint	S Square Monopoint Canopy	30-2900L 32 watts 2900 lms 50-4500L 48 watts 4500 lms 60-6000L 60 watts 6000 lms	Commercial T35 3500K Industrial T40 4000K			FL45 45° Flood	


¹ Choose shape only if selecting 13127-M

² Warm Dimming Only Available for 13127-15 & 13127-30