

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

For wall wash ceiling tracklighting that's vertically and horizontally rotational in hospitality, residential and commercial applications, consider this versatile LED light.

PRODUCT FAMILY ACCESSORIES

- 13000-TC Track Channel
- 13000-LC Linear Connector
- 13000-OA Outlet Adapter
- 13000-SC Slope Ceiling Track Adapter
- 13000-TB T-Bar End Feed
- 13000-FC Floating Canopy Connector
- 13000-EC End Cap
- 13000-LC Live End with Canopy
- 13000-LE Live End
- 13000-L L-Connector
- 13000-T T-Connector
- 13000-X X-Connector
- 13000-MC Mini Connector
- 13000-CP Cord and Plug Connector
- 13000-PA Pendant Adapter
- 13000-CC Conduit Connector
- 13000-CK Conduit Continuation Kit

FEATURES

Construction: Die-Cast Aluminum Body with Indirect Linear LED Strip Reflecting Off a Polished Aluminum Reflector Providing Excellent Asymmetric Wall Washing

Adjustability: 355° Horizontal and 135° Vertical Rotation (Track Mount Only)



Dimming: 3-Wire Electronic Low Voltage (100%-1%)

CRI: 80

Life: 50,000 Hours

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listings: cULus Listed, DLC Certified

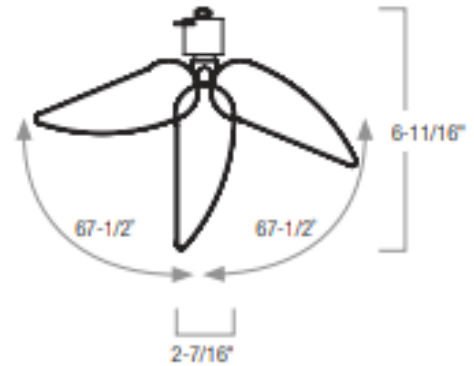

ORDERING INFORMATION Example: (13252-M-R-8-30K-WH-H1)

Model	Canopy Shape ¹	Length Wattage Lumens	Color Temp	Finish	Mounting Voltage
13252 Track Lighting	R Round Canopy	8 8" 15 watts 1000 lumens 12 12" 30 watts 2300 lumens	Residential 30K 3000K Commercial 35K 3500K 40K 4000K	WH White BK Black SL Silver	H1 H-Track 120V C2 4-1/4" Round Canopy 120V or 277V
13252-M Monopoint	S Square Canopy				

¹ Choose shape only if selecting 13252-M

PHOTOMETRICS

Test Information

Part Number: 13252-30K
 Lumens: 941lm
 Wattage: 14.4W
 Efficacy: 65lpw
 CCT / CRI: 3000K / 80 CRI
 Spacing Criteria (0°-180): 2.82
 Spacing Criteria (90°-270): 1.1

Multiple unit data (footcandles)


Distance from ceiling (ft.)	2' from wall 2' on center		
1'	20	18	20
2'	87	90	87
3'	56	60	56
4'	32	34	32
5'	19	20	19
6'	11	12	11
7'	7	7	7
8'	5	5	5
9'	3	3	3
10'	2	2	2

Multiple unit data (footcandles)

Distance from ceiling (ft.)	2' from wall 3' on center		
1'	18	13	18
2'	74	68	74
3'	47	49	47
4'	27	29	27
5'	16	18	16
6'	10	11	10
7'	6	7	6
8'	4	4	4
9'	3	3	3
10'	2	2	2

Multiple unit data (footcandles)

Distance from ceiling (ft.)	3' from wall 3' on center		
1'	0	1	0
2'	33	31	33
3'	39	40	39
4'	30	31	30
5'	21	22	21
6'	14	15	14
7'	10	10	10
8'	7	7	7
9'	5	5	5
10'	4	4	4



Example: Two luminaires located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 39fc beneath and 40fc between luminaires.

Test Information

Part Number: 13252-30K
 Lumens: 1942lm
 Wattage: 27.9W
 Efficacy: 70lpw
 CCT / CRI: 3000K / 80 CRI
 Spacing Criteria (0°-180): 2.92
 Spacing Criteria (90°-270): 1.2

Multiple unit data (footcandles)


Distance from ceiling (ft.)	2' from wall 2' on center		
1'	49	53	49
2'	183	196	183
3'	120	130	120
4'	65	70	65
5'	35	37	35
6'	19	20	19
7'	12	12	12
8'	7	8	7
9'	5	5	5
10'	3	3	3

Multiple unit data (footcandles)

Distance from ceiling (ft.)	2' from wall 3' on center		
1'	44	40	44
2'	154	144	154
3'	100	104	100
4'	55	60	55
5'	30	33	30
6'	17	19	17
7'	11	11	11
8'	7	7	7
9'	5	5	5
10'	3	3	3

Multiple unit data (footcandles)

Distance from ceiling (ft.)	3' from wall 3' on center		
1'	1	2	1
2'	73	74	73
3'	81	87	81
4'	63	68	63
5'	44	48	44
6'	29	31	29
7'	19	20	19
8'	13	13	13
9'	9	9	9
10'	6	6	6



Example: Two luminaires located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 81fc beneath and 87fc between luminaires.