

INSTALLATION INSTRUCTIONS


⚠ WARNING - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition to the National Electric Code and all applicable state and local building codes. The final installation must be approved by the appropriate qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. Be sure the electrical power to the circuit has been disconnected before installing this electrical system.

Save and read all instructions prior to installation

CHANGING COLOR TEMPERATURE

Select color temperature prior to installation. Color temperature switch is located on the back of the track head. **NOTE:** Track heads are preset at 3000K

1. Before installation, set the track heads to desired color temperature.
2. Slide the switch to the desired color temperature (3000K / 3500K / 4000K)

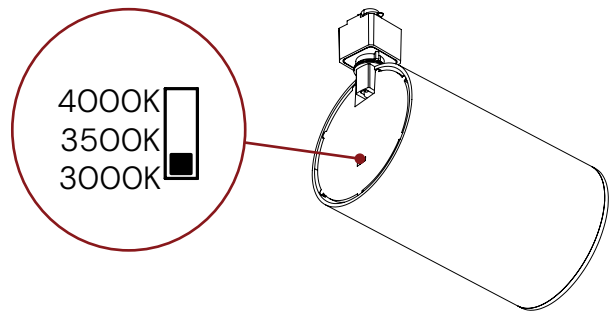

SINGLE AND TWO CIRCUIT INSTALLATION (H-STYLE)

1. Turn off power to track before beginning installation.
If installing in single circuit track, proceed to step 3.
2. If installing in two circuit track, raise "Circuit Contact" on the track head adapter by using a flathead screwdriver to lift up contact to second circuit. (Figure 1)
3. Align the track head adapter and contacts parallel with track.
4. Insert the adapter into the track and twist the adapter towards the polarity line until the latch locks into track. (Figure 2)

